

Canon PowerShot ELPH 150 IS Face Plate Replacement

This guide will help users of all abilities to...

Written By: Alex Larrimore



INTRODUCTION

This guide will help users of all abilities to replace the faceplate/front panel of their camera.



Phillips #00 Screwdriver (1)

Step 1 — Back Plate/Menu Buttons



• Locate the ON/Off button on the top of the camera and hold it down until the screen and all lights on the camera go dark.

Step 2



 Locate the back plate of the camera (contains the LCD screen and menu buttons).


Step 3





- To remove the back plate you will need to unscrew the 6 support screws securing it to the camera.
- Use a Phillips #00 screwdriver to remove the first 2 screws on the bottom of the camera.

Step 4

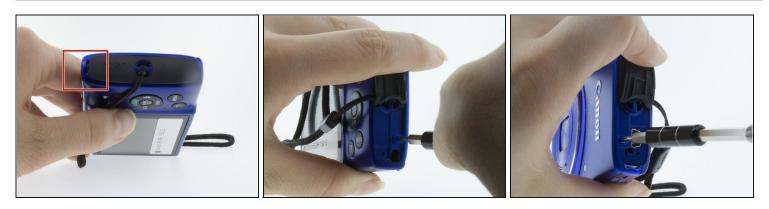

• Remove the next 2 screws located behind the AV port using the same Phillips #00 screwdriver.


Step 5



• Use a Phillips #00 screwdriver to remove the final 2 screws from the blue side panel.

Step 6







- Use your hands or a spudger to gently pry the front and back case apart along the seams on the bottom of the camera.
- Completely remove the back plate.

To reassemble your device, follow these instructions in reverse order.