

JBL Flip 3 Speaker Replacement

Written By: Faizan Naveed





Pry Bar (1)
Phillips #00 Screwdriver (1)

Step 1 — Removing Speaker Grill Part 1



Using a pry opening tool, pry into the speaker grill covering as seen in the photos.

Step 2 — Removing Speaker Grill Part 2



• Continue to pry open the grill all the way around until it can be removed from the unit itself as seen in the pictures.

Step 3 — Remove Speaker Screws



 Remove all 8 speaker screws using a Philips 00 screwdriver.


Step 4 — Remove Speaker from Housing





• Using a pry tool, remove speakers from housing as seen in the picture.

Step 5 — **Remove Speaker Connection**

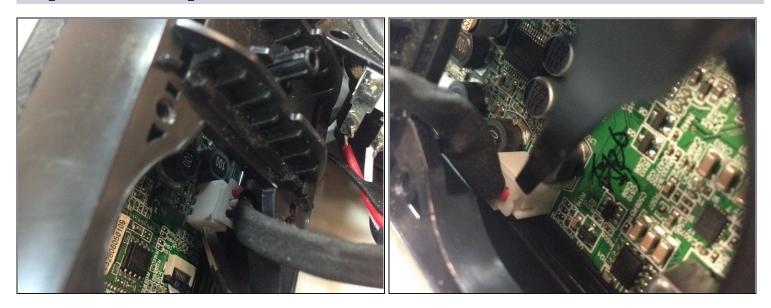

• Using <u>tweezers</u>, carefully remove both side speakers from the motherboard as shown in the pictures.

To reassemble your device, follow these instructions in reverse order.