



Archived

# Dell XPS 13 Battery Replacement

[Click here for the updated version of this...](#)

Written By: Ella Herrmann



# INTRODUCTION

[Click here](#) for the updated version of this guide. The guide you are currently viewing is archived here for historical purposes only.

---

## TOOLS:

[T5 Torx Screwdriver](#) (1)  
[Tweezers](#) (1)  
[iFixit Opening Tool](#) (1)  
[Phillips #0 Screwdriver](#) (1)

## PARTS:

[Dell XPS13 9343 9350 Replacement Laptop Battery](#) (1)


---

### Step 1 — Back Cover



- Remove the eight 4 mm T5 Torx screws from the bottom cover.

## Step 2

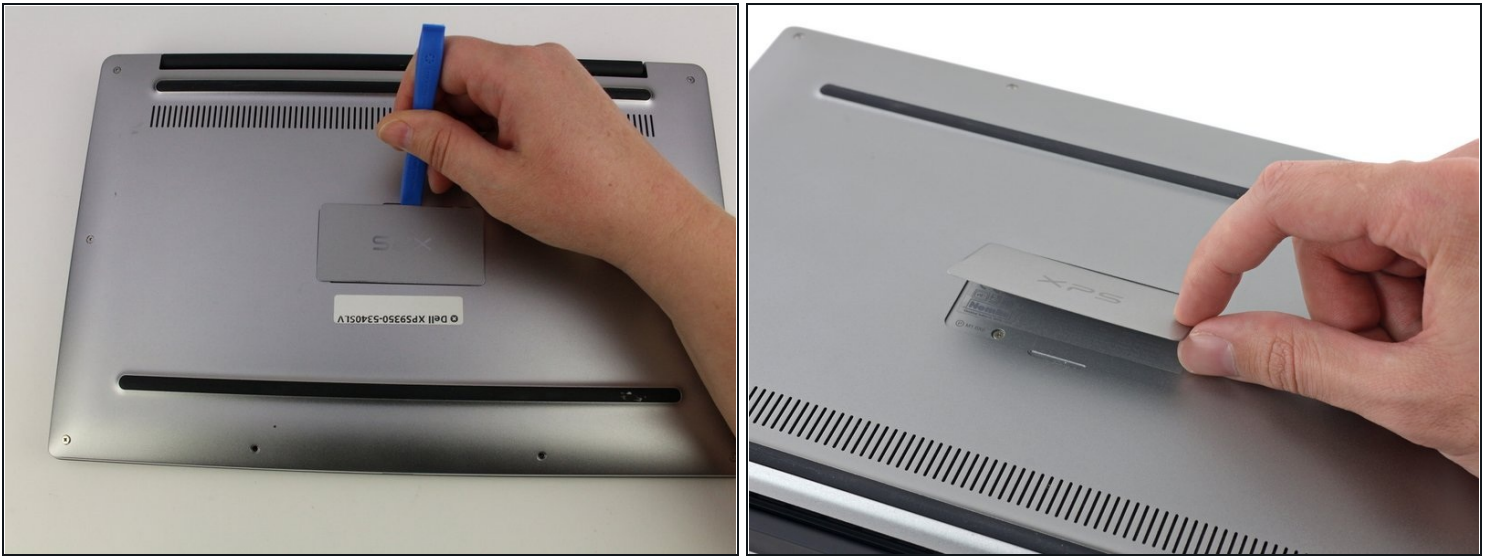

- Use a plastic opening tool to pry open the 'XPS' flap in the middle.

## Step 3



- Remove the single Phillips screw hidden beneath the flap.

## Step 4



- Use opening picks or a plastic pry tool to pry open the case clips, beginning from the back edge.

## Step 5





- Remove the bottom cover.

## Step 6 — Battery



- Remove the four 3 mm Phillips #0 screws located on each corner of the battery.


## Step 7

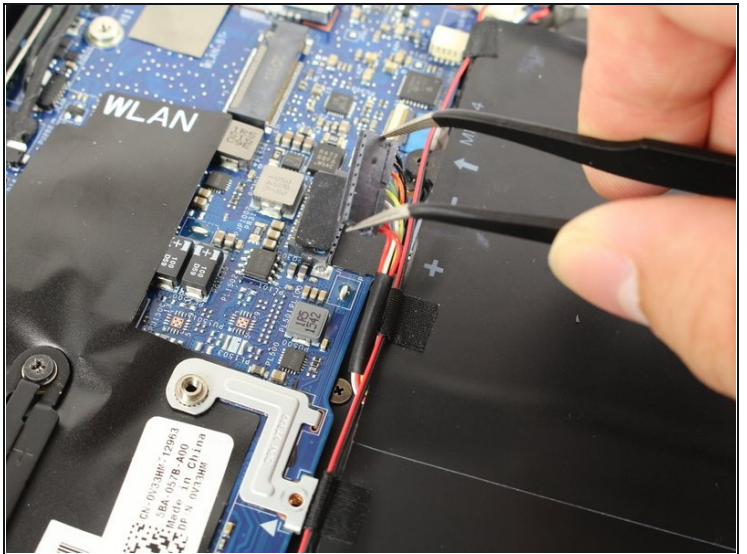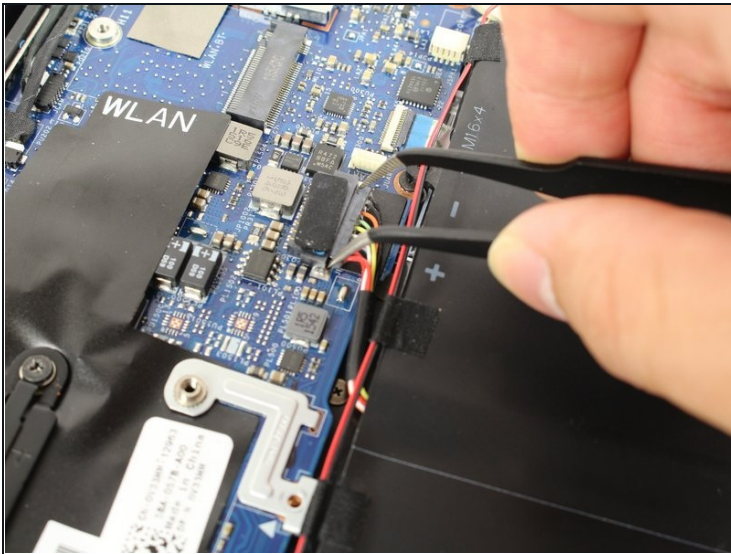

- Pull the battery cable connector towards the battery to disconnect it from its socket.

⚠ Do not pull up.

## Step 8

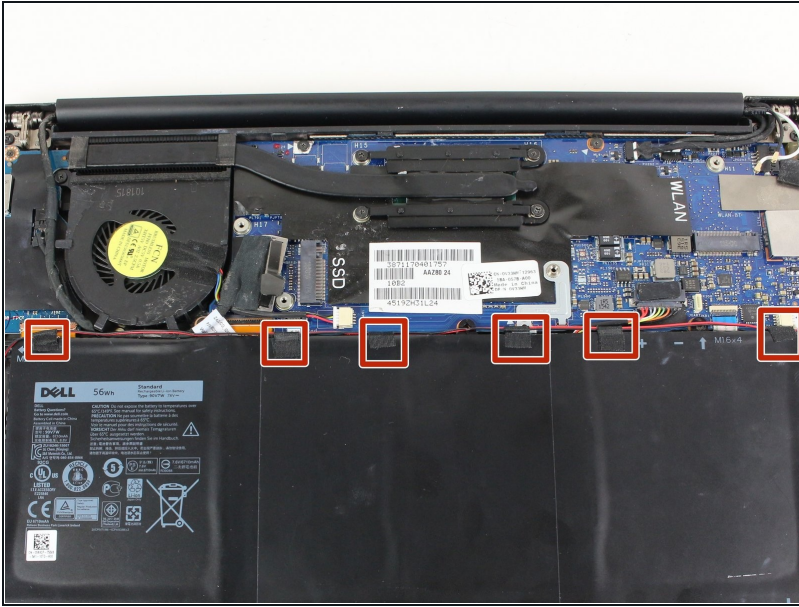

- Peel up any tape securing the speaker cables to the battery.
- ① You do not need to remove the speakers, only the tape, allowing the battery to be removed out under the speaker cables.

## Step 9



- Remove the battery.

To reassemble your device, follow these instructions in reverse order.