




Xiaomi Redmi Note Rear Camera Replacement

This guide will demonstrate how to replace the rear camera in the Xiaomi Redmi Note.

Written By: AJ Beers

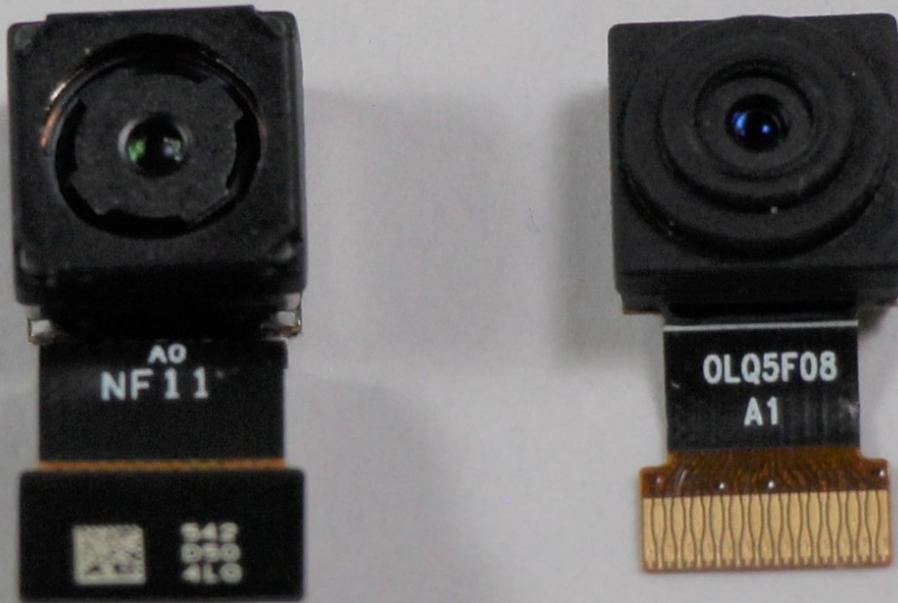


INTRODUCTION

This guide will show you how to replace your phone's rear-facing camera.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery

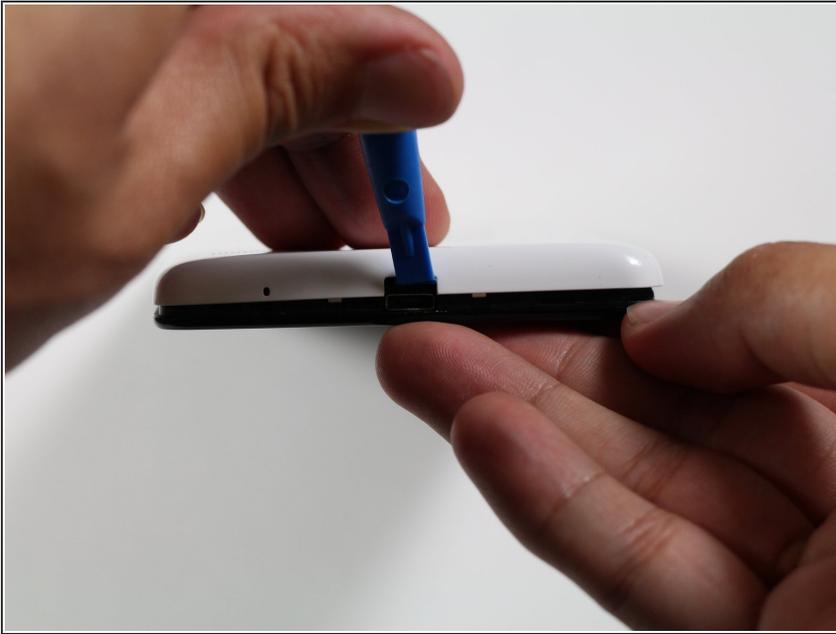

- ⓘ Make sure the Xiaomi Redmi Note is powered off before removing the battery.
- Insert the plastic opening tool between the charging port and the rear case.
- Pry the end of the rear case up from the charging port.

Step 2




- Run the plastic opening tool along the seam on the side of the phone to remove the rear casing.

Step 3




- Locate the indentation at the bottom of the battery.
- Place a finger in the indentation and lift up to remove the battery.

Step 4 — Midframe

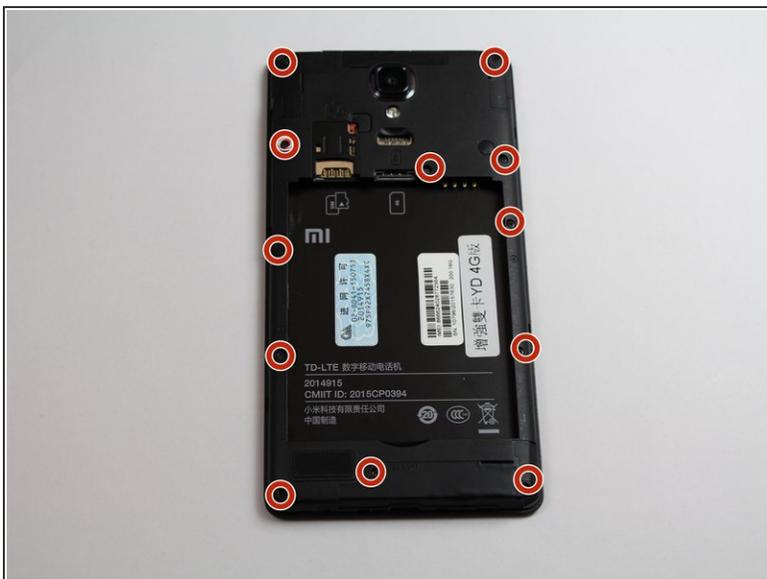



- Remove twelve 3.5mm Phillips #00 screws from the midframe.

Step 5

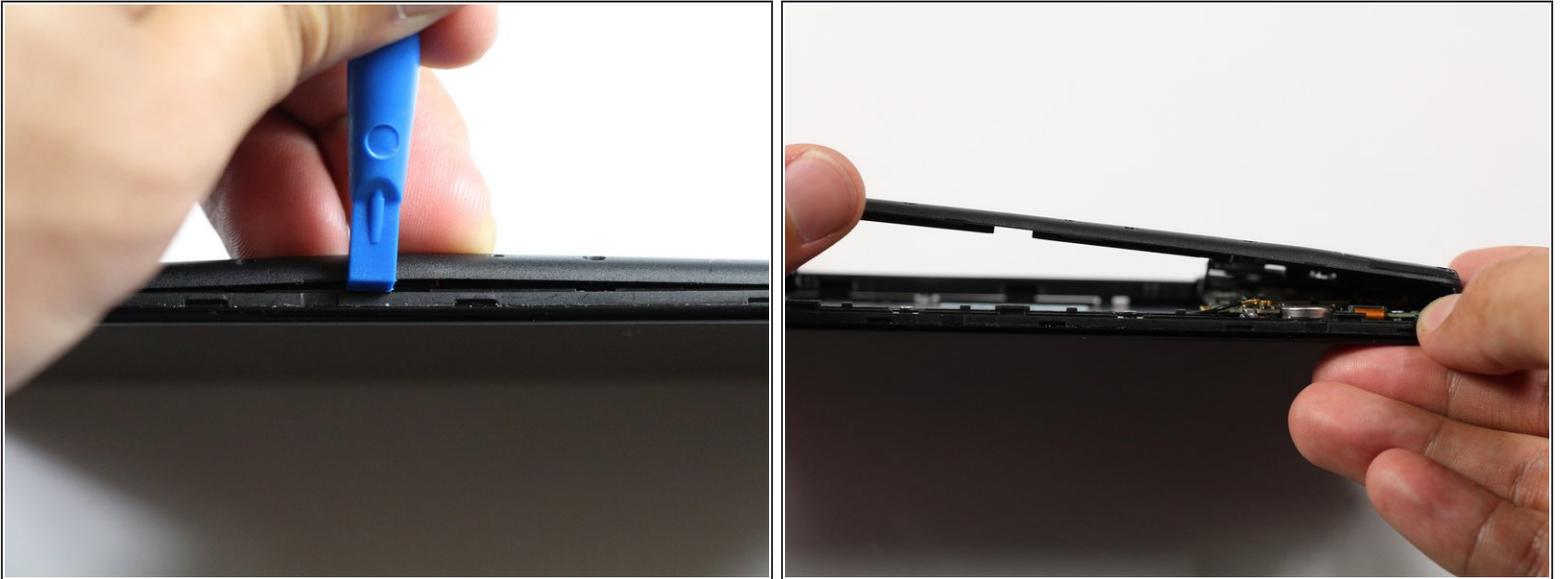

- Insert a plastic opening into the seam between the midframe and the bottom frame of the phone.
 - Run the plastic opening tool along the seam.
 - Pry up the midframe with the plastic opening tool.
 - Once the midframe has been sufficiently lifted with the tool, place a hand underneath the edge to lift the entire component out of the frame.
- i** There will be snapping sounds as the clips on the midframe disconnect from the phone.

Step 6 — Rear Camera

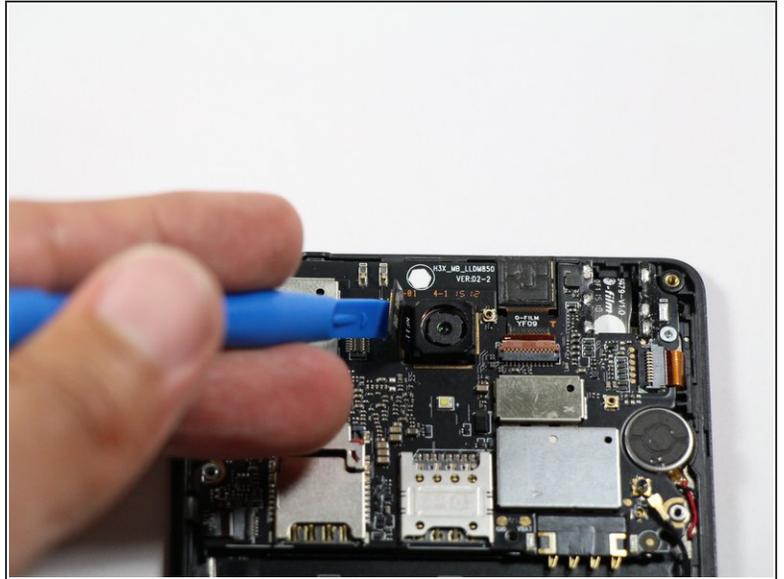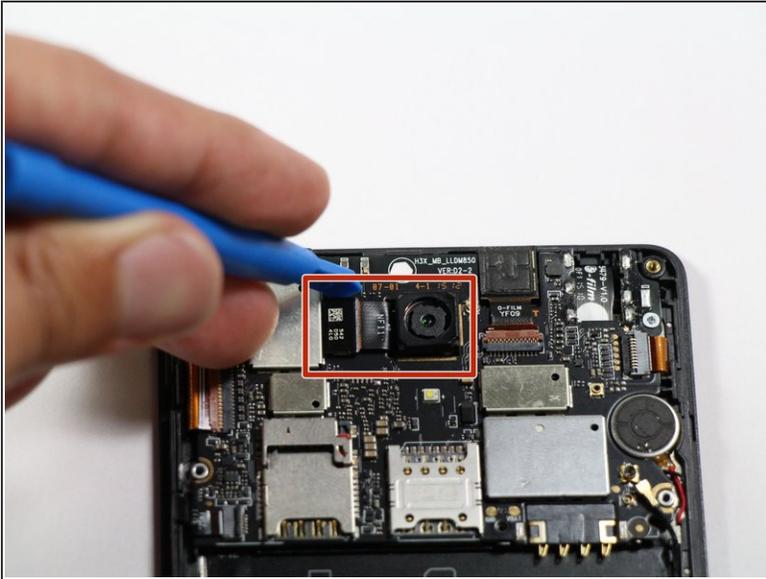

- Disconnect the rear-facing camera from the motherboard by pulling out the press-fit connector to its left.

To reassemble your device, follow these instructions in reverse order.