




Asus TF300T Tablet Display Replacement

This guide details the removal of the display for replacement.

Written By: Khairuz Zaki Md Rujhan

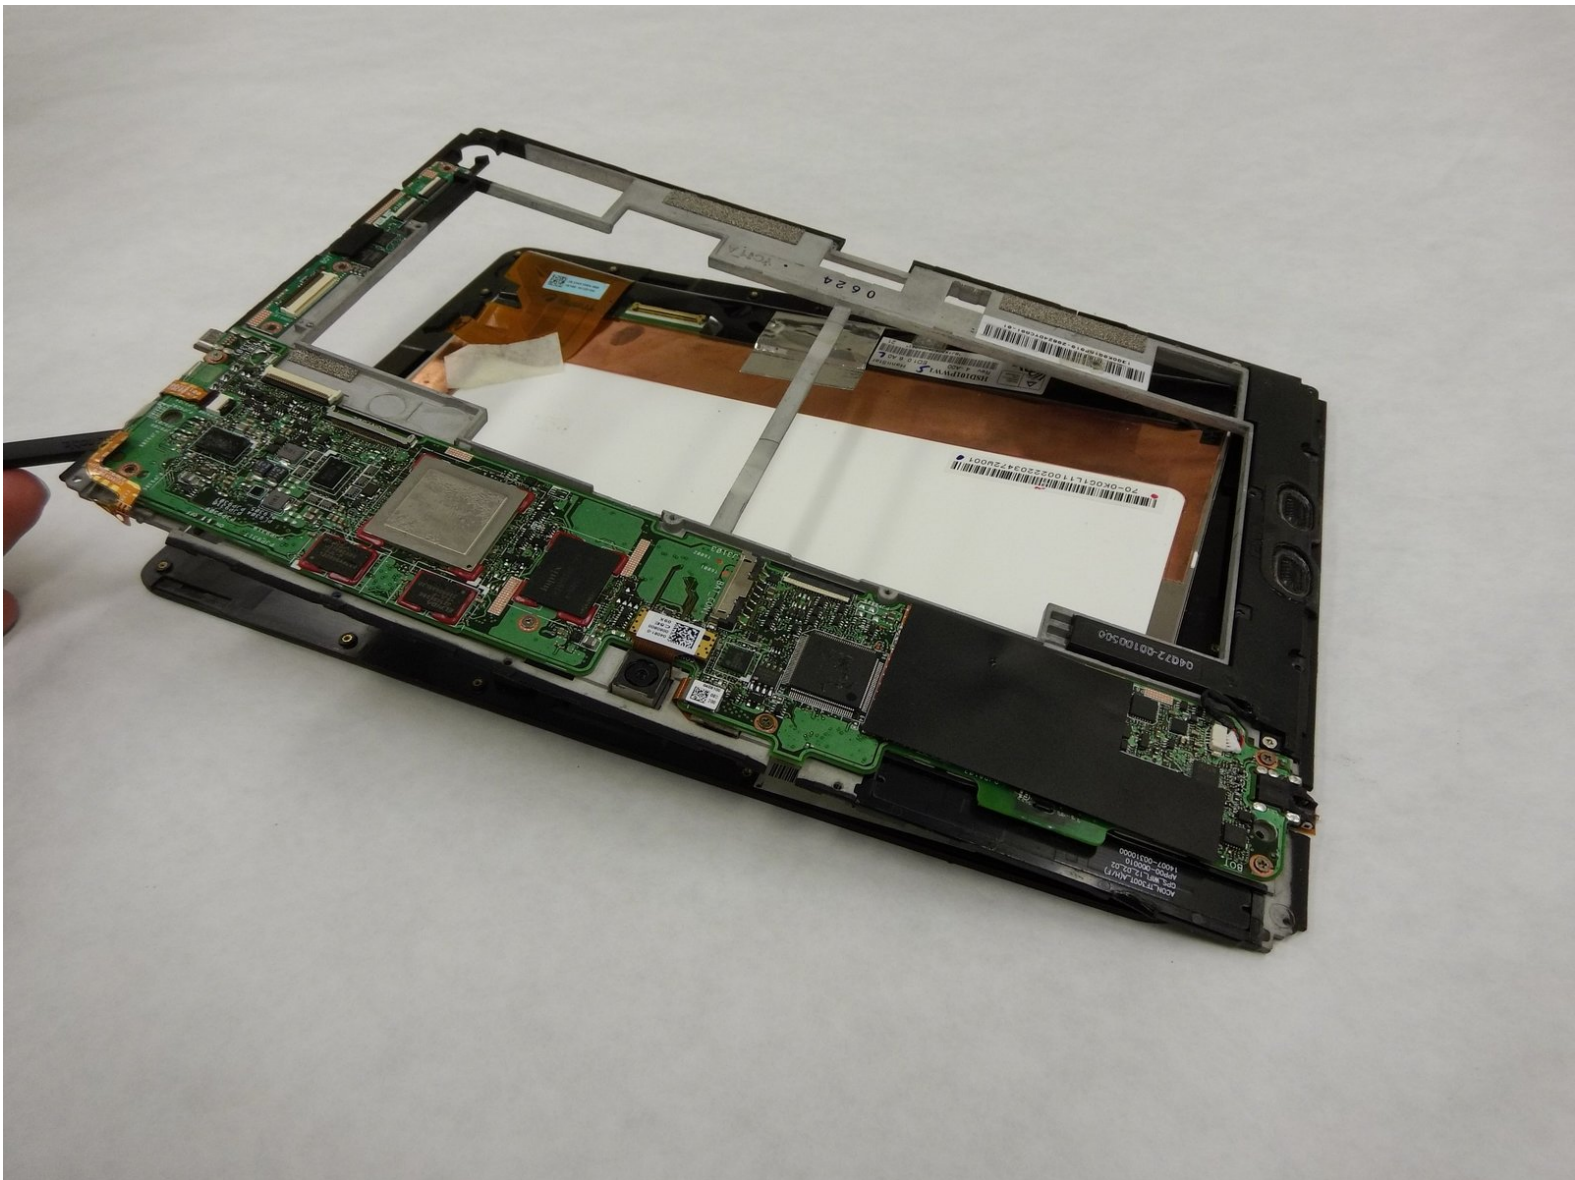

INTRODUCTION

The display for the tablet is one of the hardest parts to replace as it is attached by glued and you will need a hair dryer. The broken screen affects the display's functionality and will need replacement.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Display




- Disconnect the dock and make sure the power is turned off.
- Use plastic opening tool to pry screen up and remove from outer casing.
- ⓘ Be gentle with the plastic opening tool when you reach the charging port as the thinner plastic could be broken easily.

Step 2

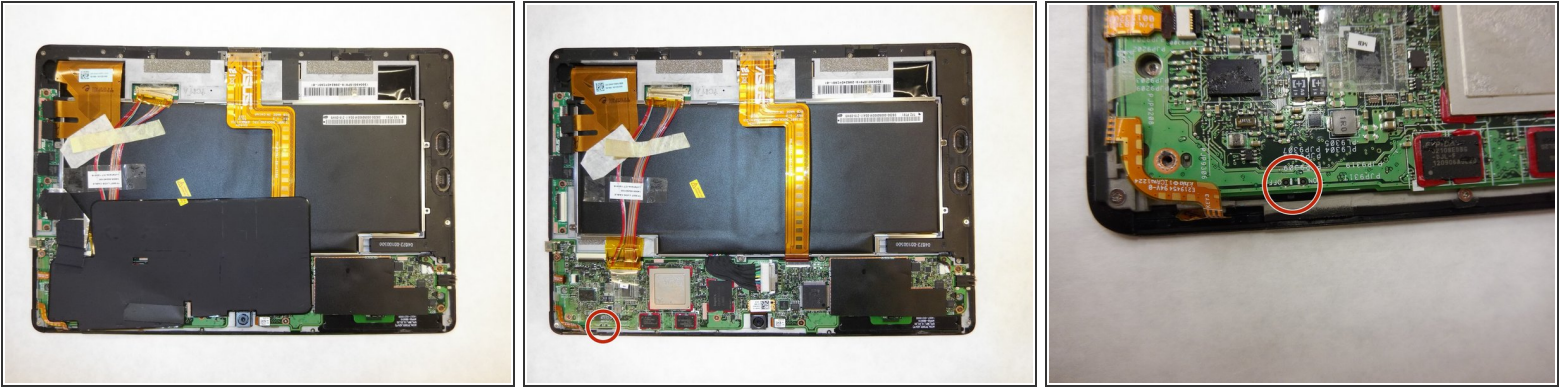



- Pull up on the black circuit board protector.
- Turn off the hard power switch before working with the tablet. Use a tool to slide the switch to the position marked "off".
- ⓘ For most of the replacement operation, you do not have to remove the battery once you turned off the switch. Make sure that you do not short anything with the metal tools.

Step 3

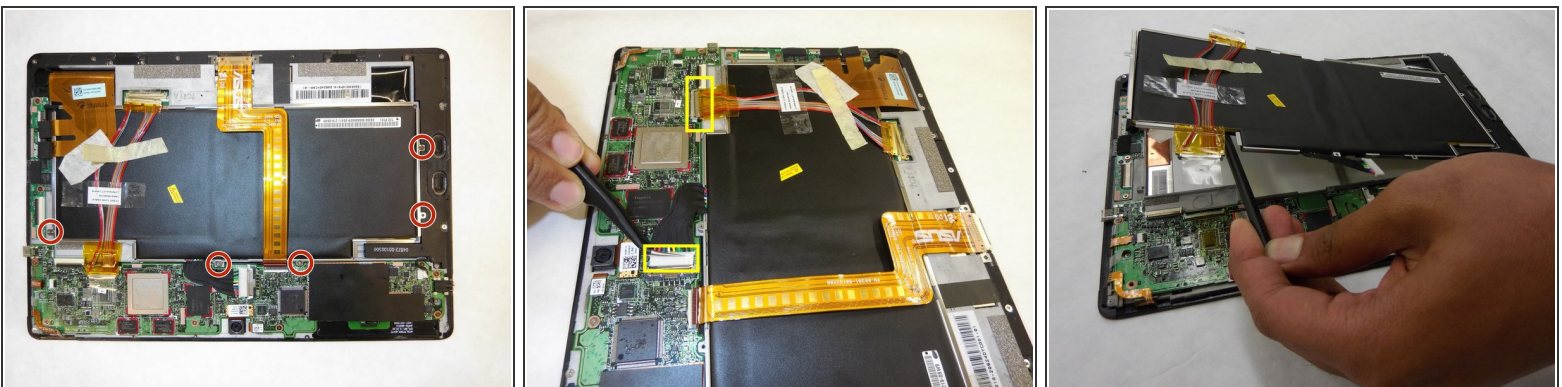

- Use a Phillips #00 screwdriver to remove the 3mm screws connecting the battery to the motherboard.
- Use the same screwdriver to remove two 3mm screws connecting the clips.
- Use tweezers to remove two wires connected from the battery to the motherboard.
- Use the spudger to remove the battery from the case.

Step 4

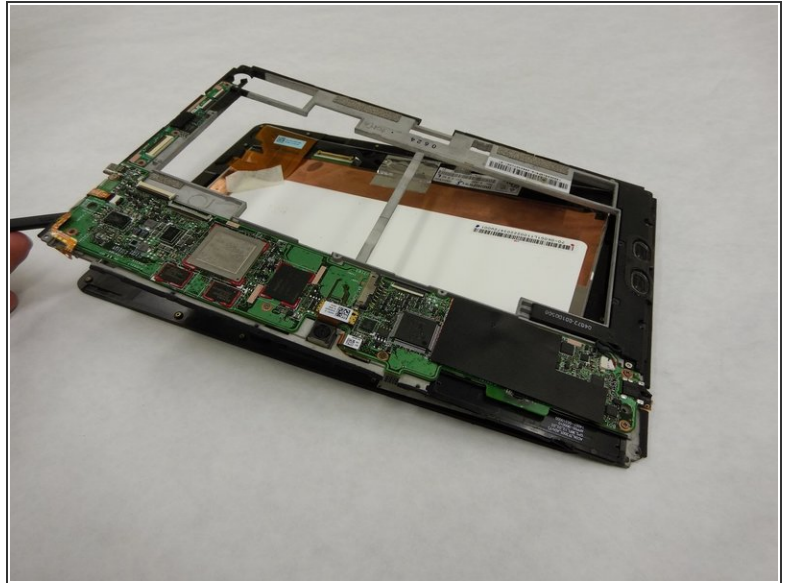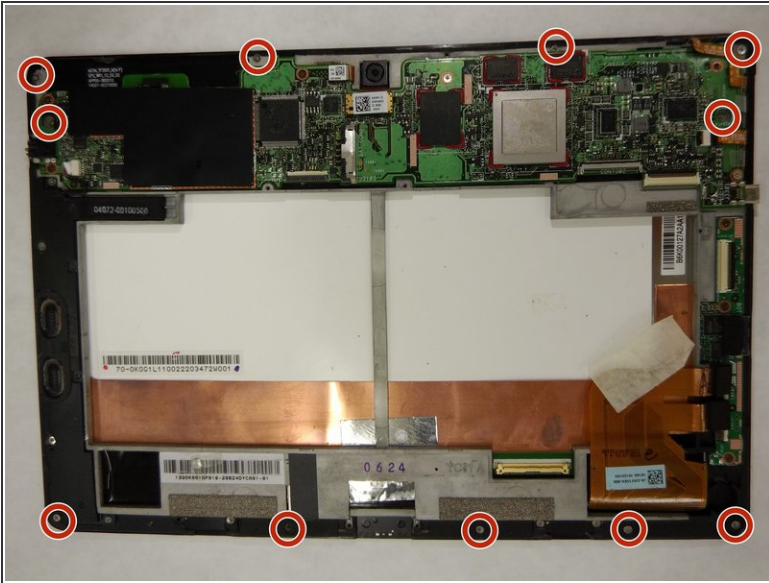

- Use a Phillips #00 Screwdriver to remove the 3mm screws that connect the metal board with the screen.

Step 5



- Use a hairdryer on high and heat the edges of the screen. Melt the adhesive holding the screen to the casing of the tablet.
- Take out the display away from the screen.

To reassemble your device, follow these instructions in reverse order.