

Nutri Ninja Ninja Blender Duo BL641 Power Cord Replacement

Power cords can be damaged over time due to...

Written By: Allie Decker



INTRODUCTION

Power cords can be damaged over time due to various causes. This guide will demonstrate how to replace the power cord.

TOOLS:

Phillips #1 Screwdriver (1) Large Needle Nose Pliers (1)


Step 1 — Power Cord






- Unscrew the screws from the base of the blender (These should be 5 gauge phillips head screws).
- 2 of the screws will be star shaped rather than phillips head.
- Remove the base plate.


Step 2

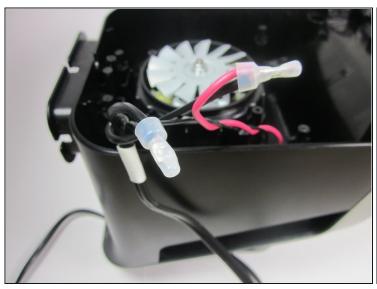

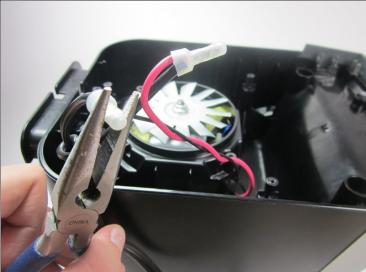

- Identify the red and black wires topped with white-clear caps.
- Use pliers to squeeze the flattened part of both caps.
- The black and red wires attached to the power cord should be loose and ready to pull out.

Step 3

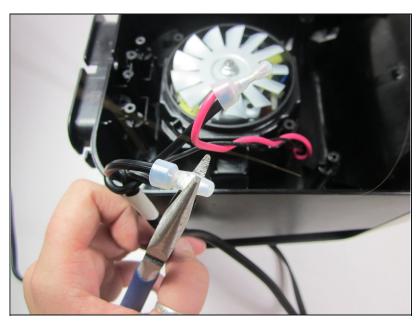

- Replace the cord by slipping the new cord's black and red wires into the caps.
- Pinch the middle of the cap back to the flattened position using the pliers.

