



HP Pavilion Wave 600-a014 Mouse and Keyboard Replacement

How to replace the built-in mouse and keyboard if any of them malfunctions.

Written By: Kyaw Soe



INTRODUCTION

HP Pavilion Wave comes with a pair of built-in mouse and keyboard. This guide shows you how to replace them without using any additional USB-port for your mouse and keyboard.



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tool](#) (1)



PARTS:


- [Wireless keyboard and mouse](#) (1)

Step 1 — Front IO Board

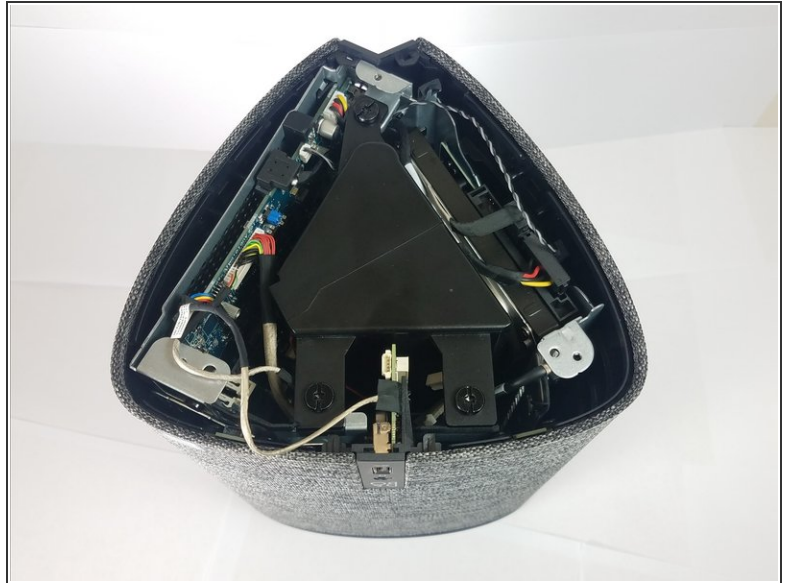



- Turn over the computer and remove the rubber feet.
- Remove the 8mm Philips screws indicated in red circles with a Philips #0 screwdriver.
- Use a pry tool and lift the lid.

Step 2

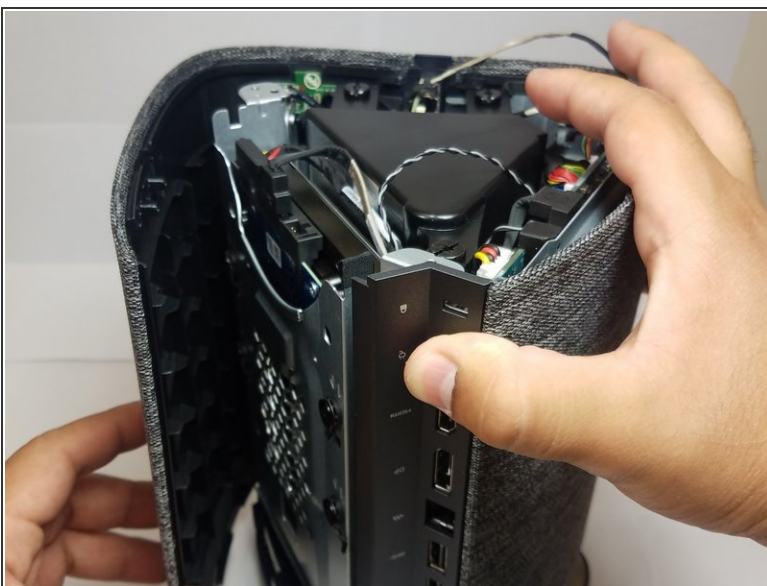

- Pry open the casing from the back of the IO panel, as shown in the pictures.

Step 3

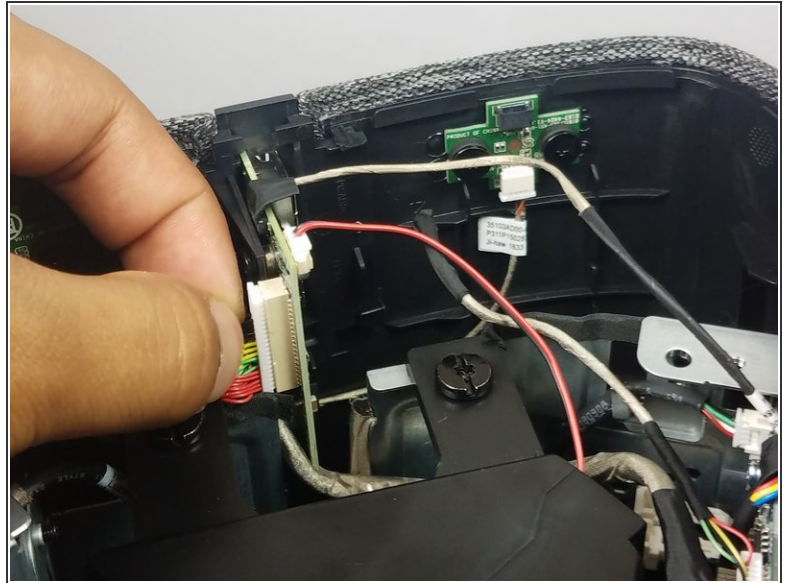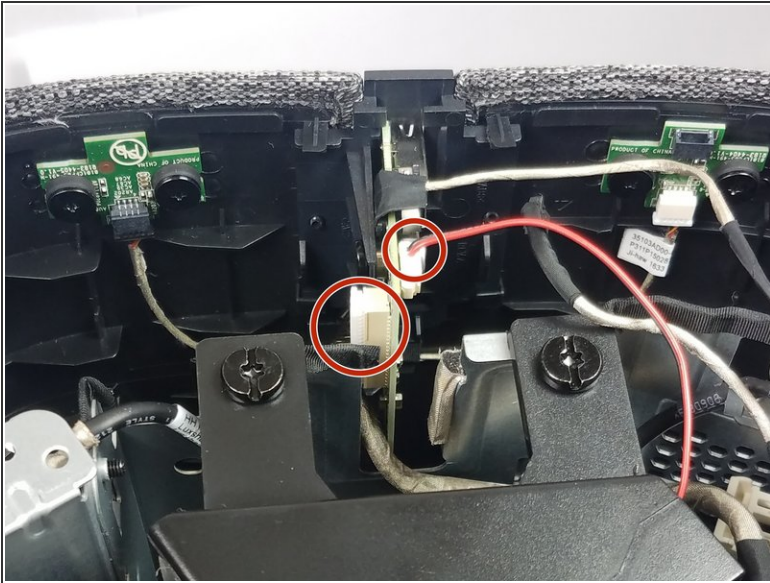


- Finally, remove the two cables circled in red from the front IO panel.

Step 4 — Mouse and Keyboard adapter



- Locate a blue USB adapter on the left side of the hard disk compartment.

Step 5

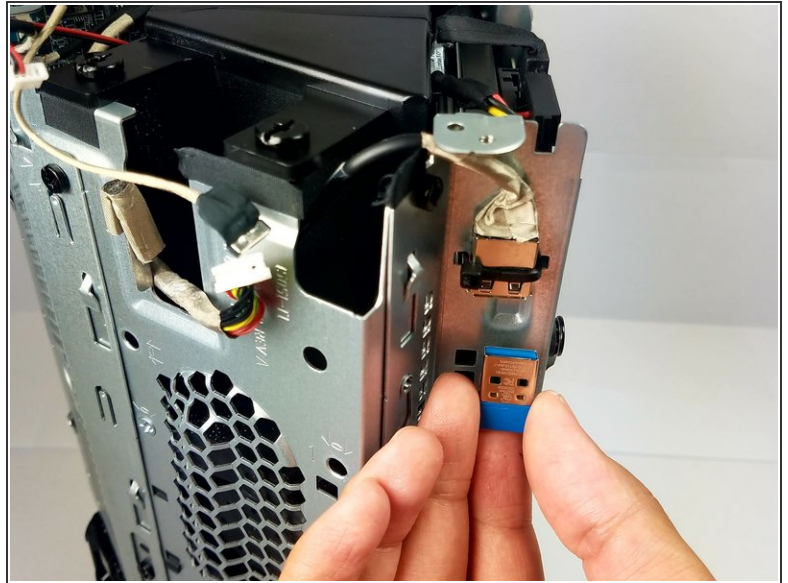

- Take off the USB with gentle but firm pressure.
- ⓘ This is a single USB adapter for both mouse and keyboard, so you must get a wireless mouse and keyboard pair, or you will have to use the extra USB for the other one.

To reassemble your device, follow these instructions in reverse order.