




Samsung Galaxy Note Pro 12.2 Audio Jack Replacement

This guide will show you how to replace a failing audio jack in your Samsung Galaxy Note Pro 12.2.

Written By: Tina Kong

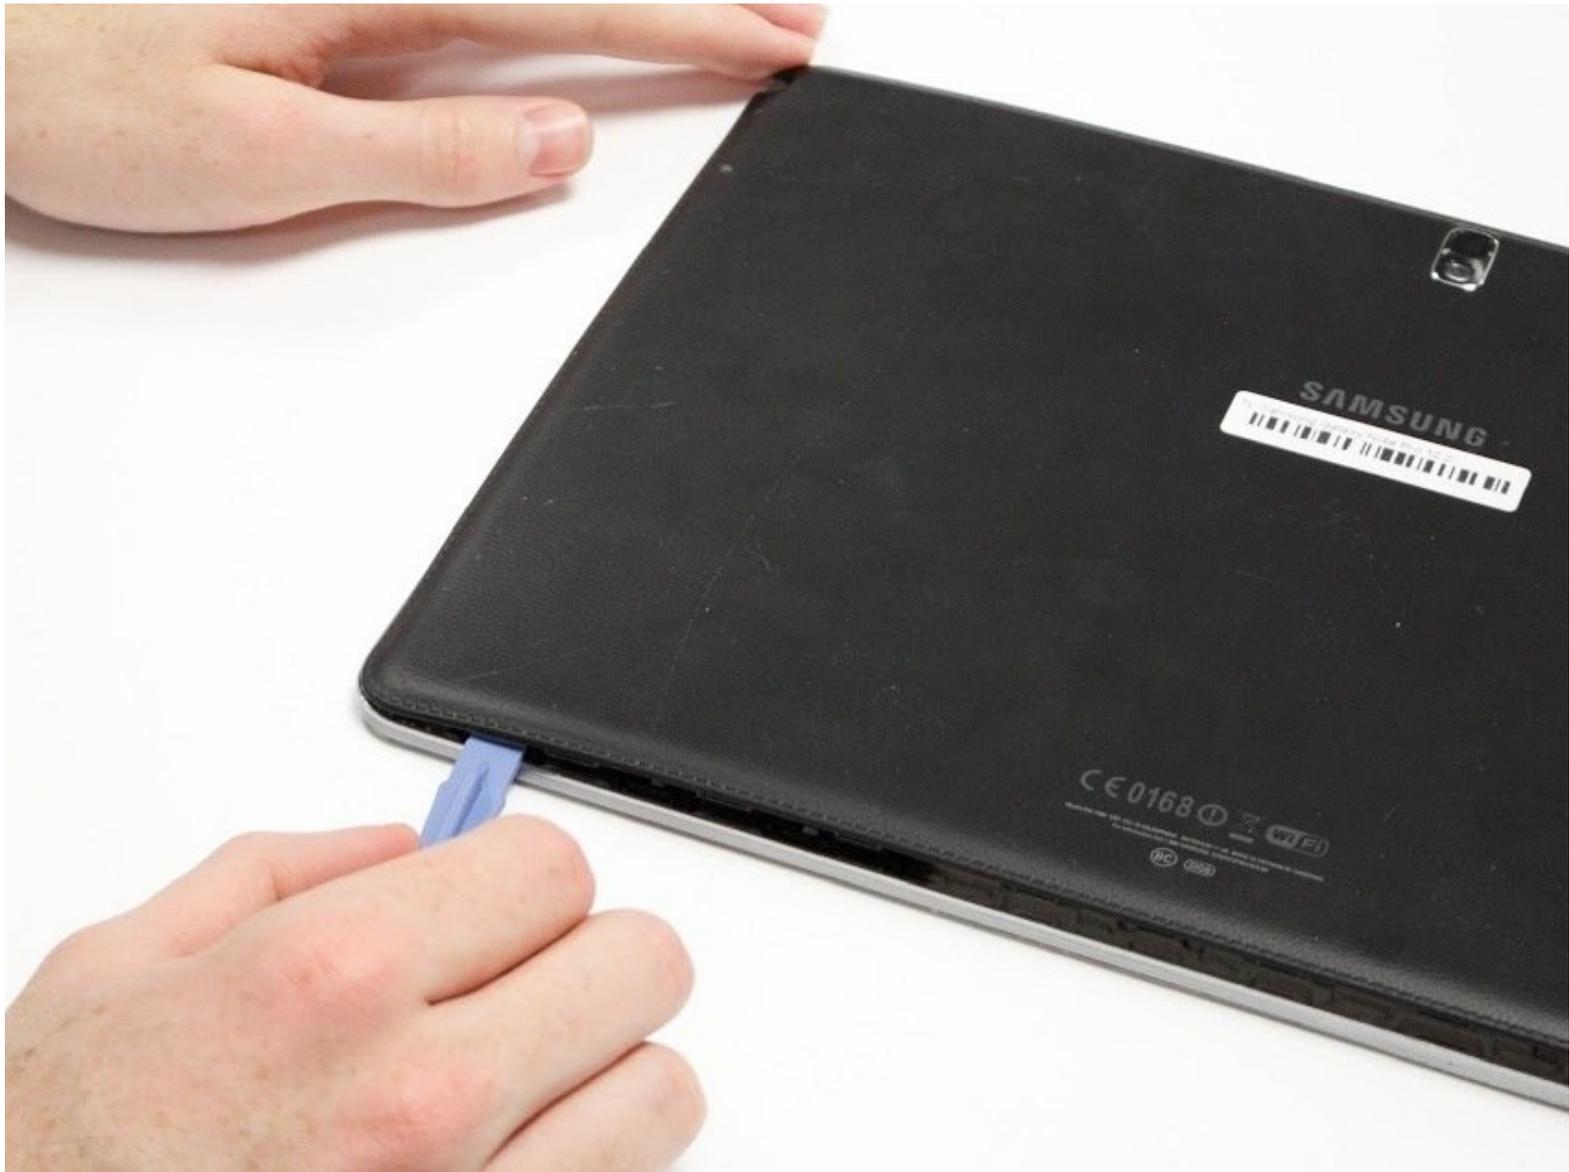

This document was generated on 2020-11-22 02:10:16 PM (MST).

INTRODUCTION

If you are having trouble with using your headphones, you may need to replace your audio jack. This guide will show you how to safely replace the audio jack in your device.

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Magnetic Project Mat](#) (1)
 - [Spudger](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Audio Jack




- i** Make sure that your device is powered off before starting your repair.
- Carefully remove the back cover with the blue opening tool.
- i** It is best to start with one corner and work your way around the device slowly.

Step 2

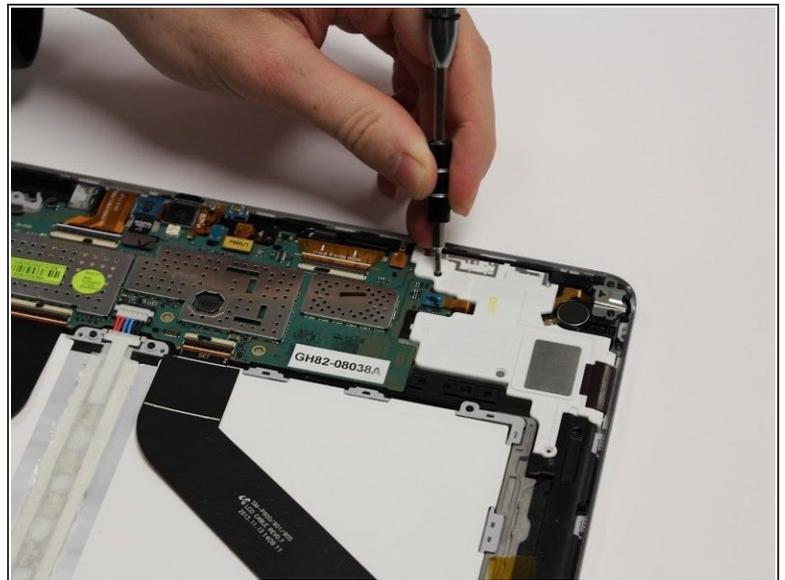

- Remove the two 3mm Phillips #00 screws securing in the white cover over the audio jack.

Step 3

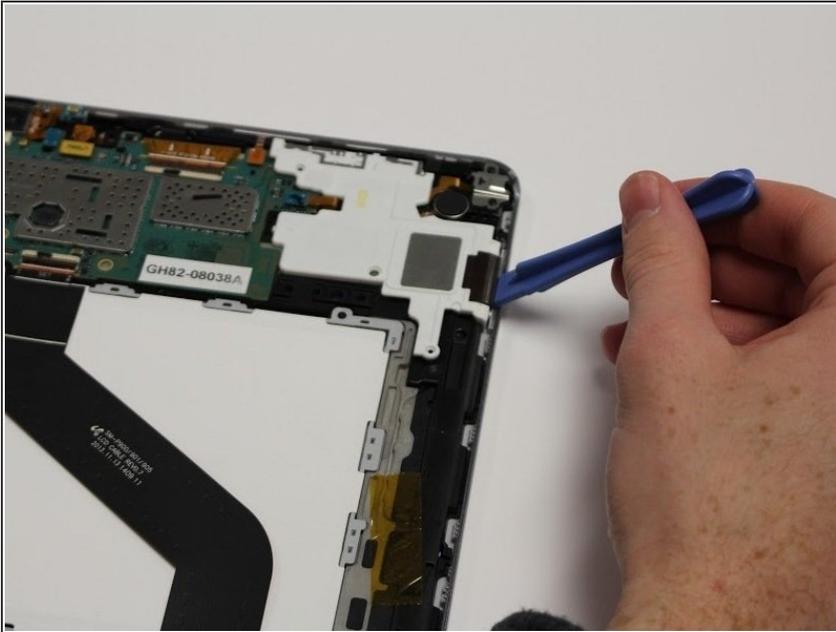



- Remove the white cover over the audio jack with the plastic opening tool by pushing up on the black connector.

Step 4




- Remove the two 3mm Phillips #00 screws over the silver cover.
- ⓘ The silver cover is attached to the whole audio jack; do not try to pull this away by itself.

Step 5

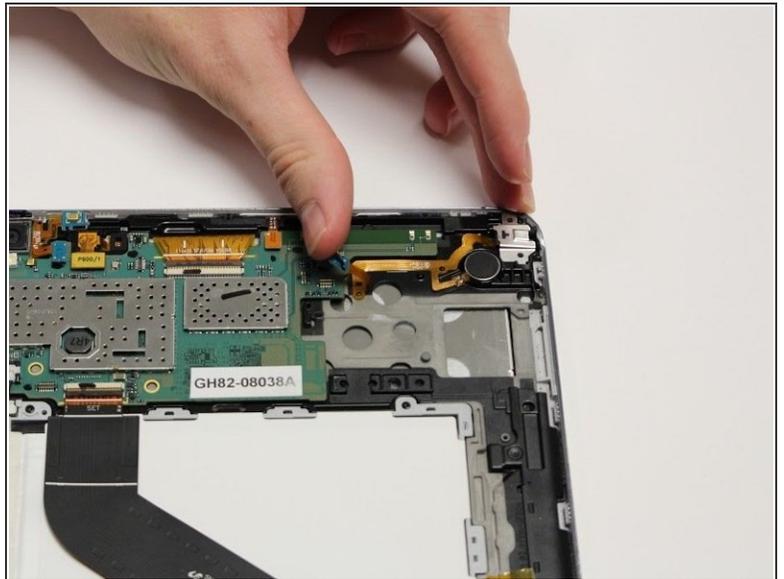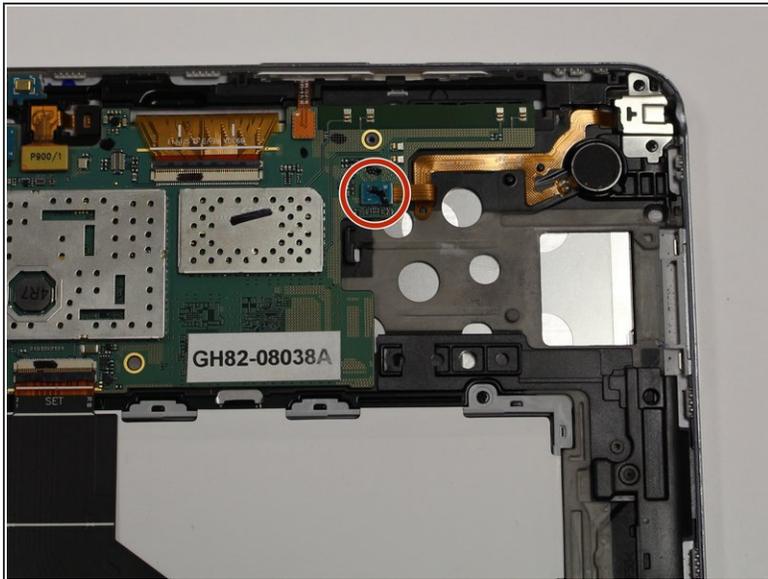


- Pop up the green connector by gently pulling up.

Step 6

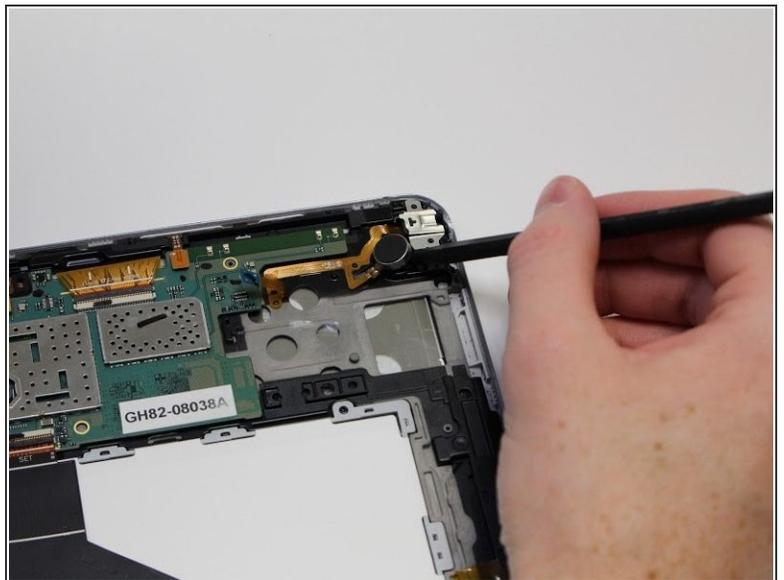

- Pull up on the circular amp with the spudger tool to release it from the device.

Step 7

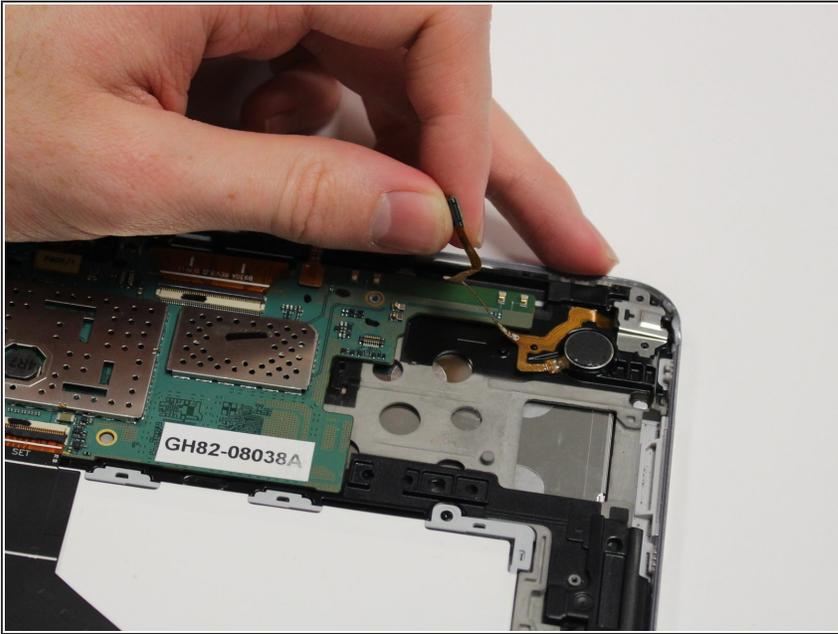

- Remove the whole audio jack by pulling gently up on the copper piece.

 This component is extremely fragile.

To reassemble your device, follow these instructions in reverse order.