



Nvidia Shield TV 1st Generation I/O Board Replacement

This guide will show you how to remove the I/O board, which holds all the cable ports for the Nvidia Shield.

Written By: Joshua Neally



This document was generated on 2020-11-16 09:18:04 PM (MST).

INTRODUCTION

If the ports on the I/O board are broken or any other components have failed, the I/O board may need replacement. Follow the steps in this guide to replace the I/O board in your SHIELD TV.

TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — I/O Board




- Flip the device over and use a plastic opening tool to remove the bottom cover.

Step 2



- Remove the indicated cables and ribbon wires.

Step 3

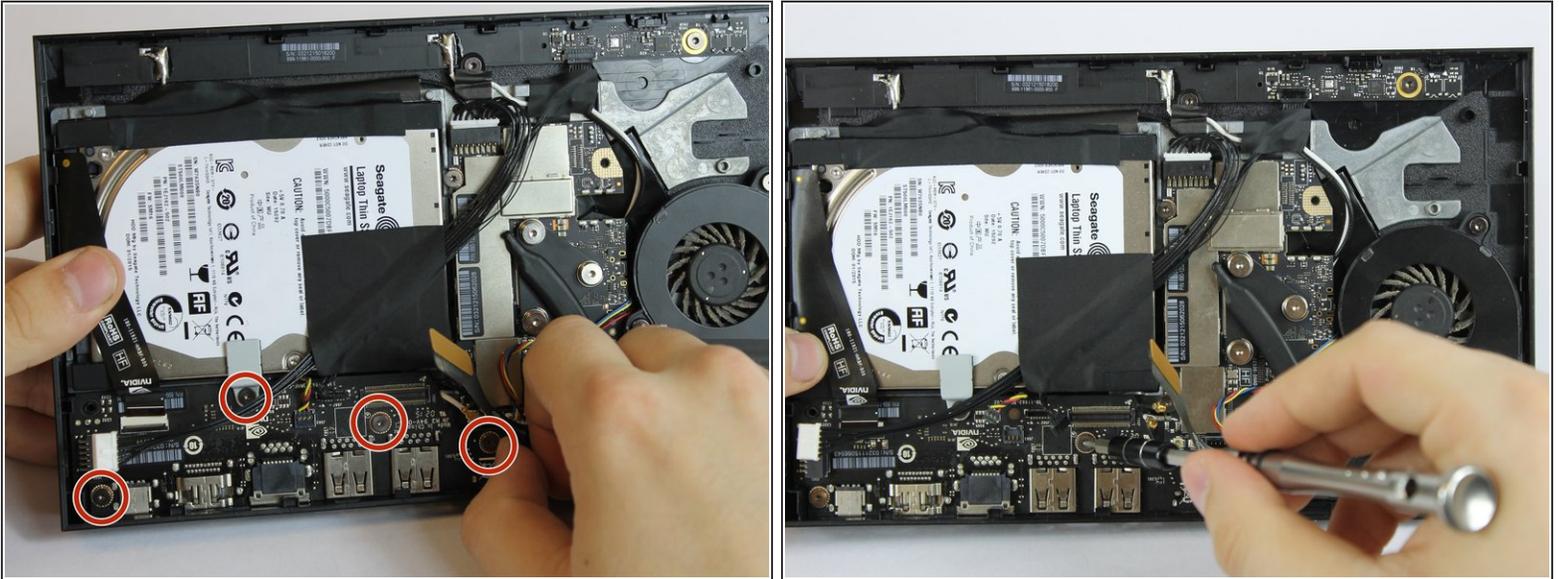

- Remove the indicated four screws using the T6 Torx screwdriver.

Step 4



- Carefully tilt and pull out the I/O board from the device.

To reassemble your device, follow these instructions in reverse order.