



# Samsung NP36535C-S05US Key Replacement

This guide will demonstrate the process of...

Written By: Mykel Vanek



# INTRODUCTION

This guide will demonstrate the process of replacing one of the keys on the keyboard.

## TOOLS:

Tweezers (1)

### Step 1 — Battery




- Turn the computer off.
- Disconnect the charging cable from the laptop.
- ⚠ Failure to disconnect cable may result in electric shock.
- Flip the laptop face down on a flat surface.

## Step 2




- Slide the left and right switches to the unlock position.

## Step 3

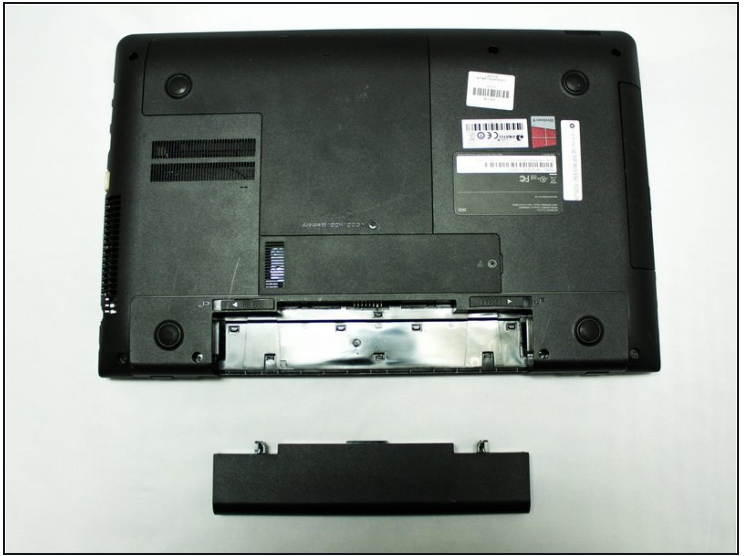

- While holding the left and right lock switches in the unlock position, pull the battery away from the computer.

## Step 4 — Key

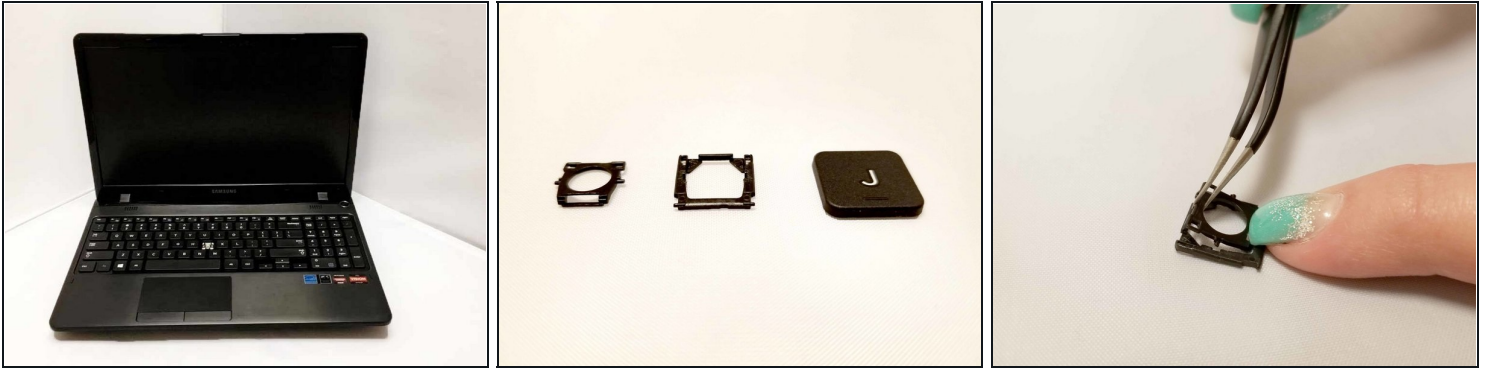

- ① There is an outer and inner piece of the retainer. The outer retainer has two (2) grooves for the inner retainer's posts to sit in.
- Place the inner retainer piece into the outer retainer piece by inserting the posts into the grooves on the outer retainer piece.


## Step 5



- ① There are two (2) grooves on the outer retainer that fit onto two (2) metal brackets on the key's designated space.
- Use angled [tweezers](#) to place the assembled retainer onto the two (2) metal brackets on the keyboard.



## Step 6

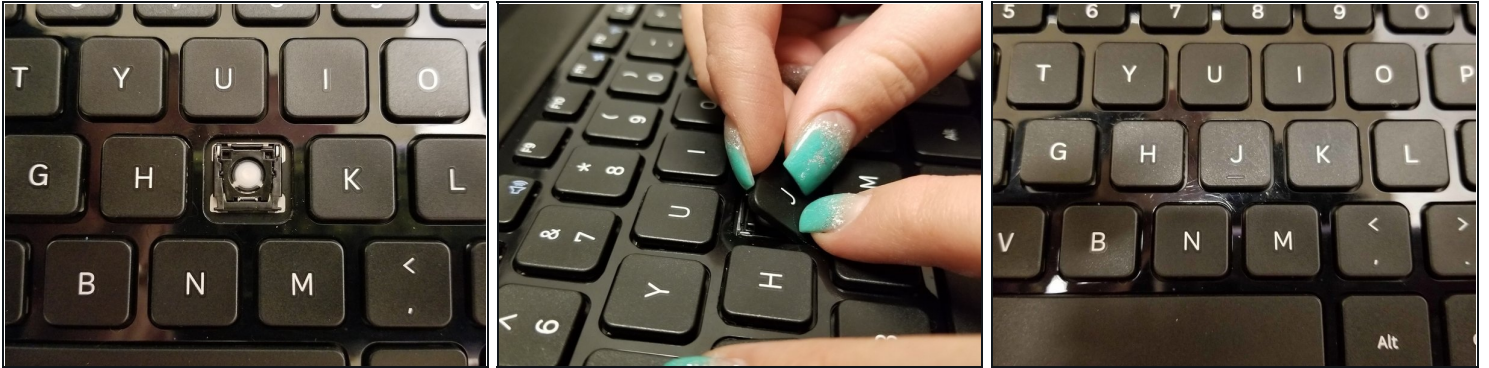

- Once the retainer is attached, press the key onto the retainer, it will make a snapping sound when in place.
- 

To reassemble your device, follow these instructions in reverse order.