




ASUS Chromebook C300MA-DH01

Motherboard Replacement

This guide will demonstrate how to replace a broken or malfunctioning motherboard on the ASUS Chromebook C300MA-DH01.

Written By: Gina Altimari

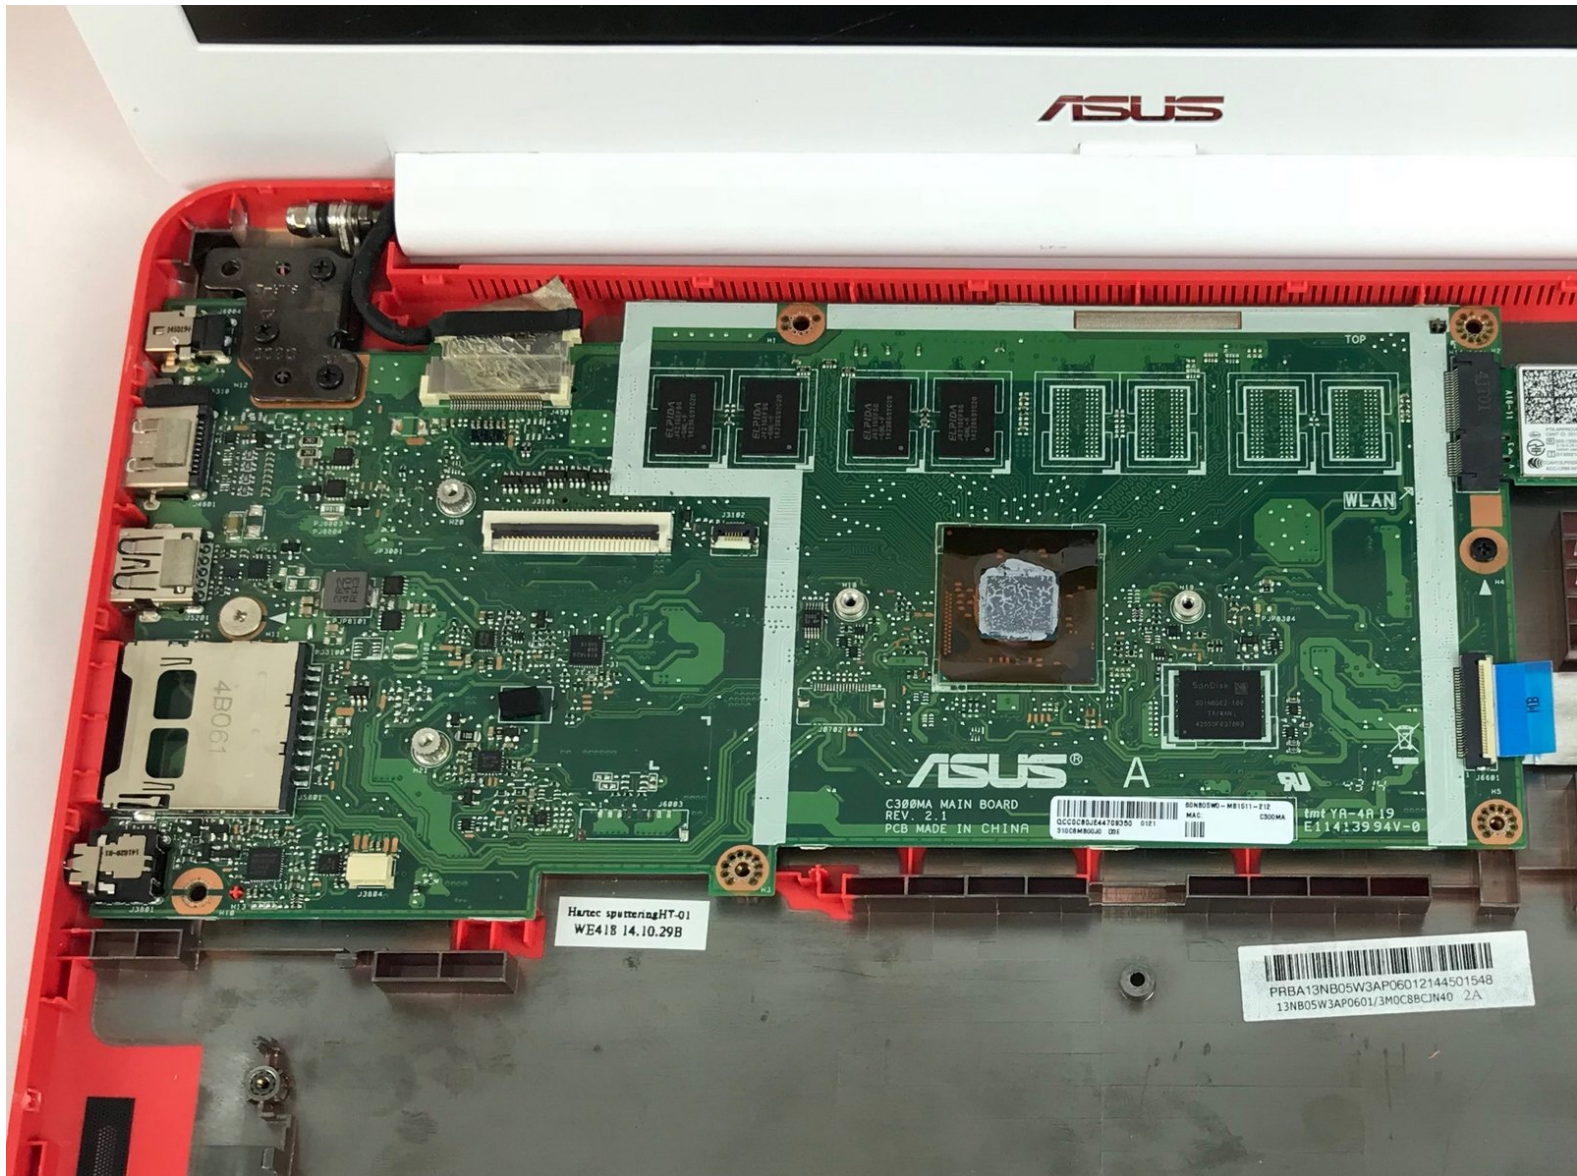



TOOLS:

- [JIS #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Metal Spudger](#) (1)

Step 1 — Motherboard



- Flip the Chromebook over so the bottom of the device is facing up.

Step 2




- Using the JIS J0 Screwdriver, remove the following screws from the bottom:
- (5) Five 6mm screws
- (6) Six 8mm screws

Step 3




- Gently wedge the spudger in between the bottom of the device and the keyboard, and carefully pry the cover open. Then, carefully lift up on keyboard.

Step 4

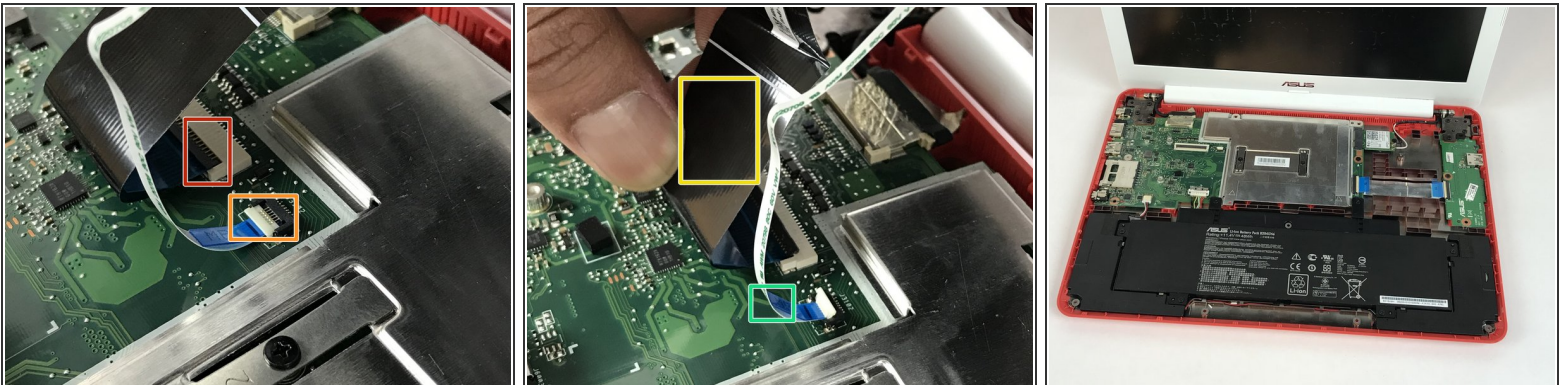

- ⓘ Gently detach connecting cables.
 - Carefully flip up the large black tab.
 - Carefully flip up the small white tab.
 - Remove its corresponding black cable.
 - Remove its corresponding white cable.
- ⓘ The keyboard will be fully detached at this point. Set it aside for now.

Step 5

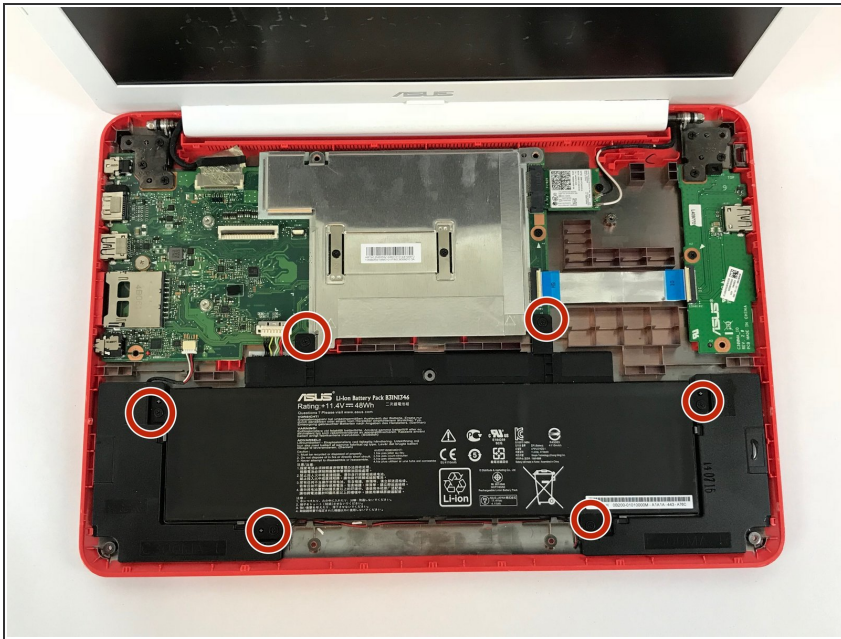

- Using the JIS J0 Screwdriver, unscrew and remove the (6) six 6mm screws from the device.

Step 6




- Using the plastic opening tool, gently push the connector tab away from the battery to detach the cable.
- ⓘ The battery will be fully detached at this point. Carefully lift it out of the device.

Step 7




- Using the plastic opening tool, disconnect the audio connection by pushing the audio tab toward the speakers.
- With the audio cable detached, carefully lift the speakers out of the device.

Step 8

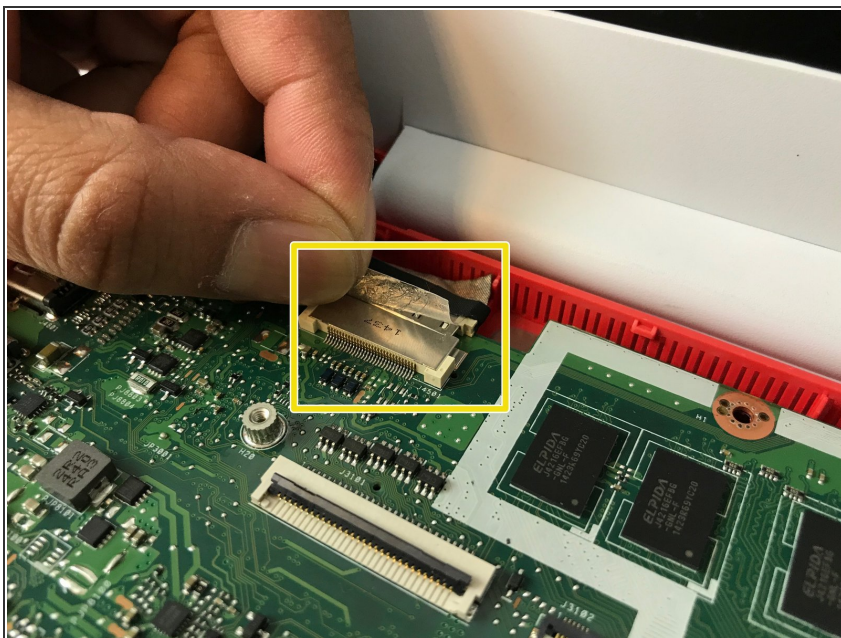

- Remove the LCD cable from the motherboard.
- Peel back the tape and then gently pull back on the connector cable.

Step 9

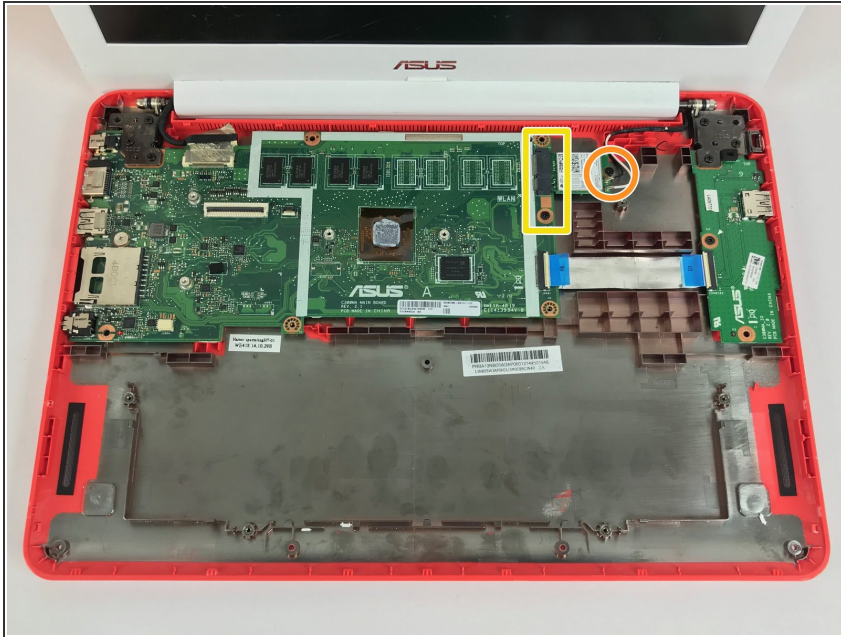


- Using the JIS J0 screwdriver, unscrew the 3mm screw.
- Remove the Wi-Fi card from the motherboard.

Step 10




- Using the plastic opening tool, lift up on data cable for the daughterboard to remove it from the device.

Step 11

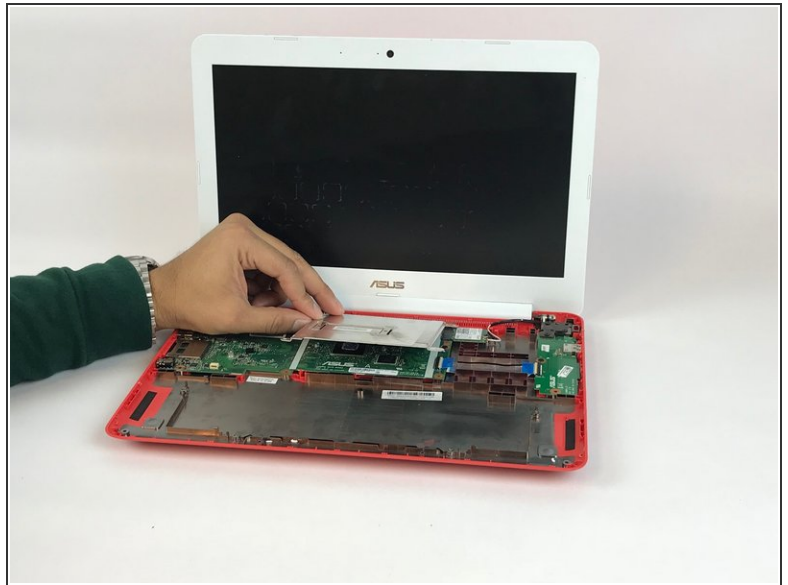



- Using the JIS J0 Screwdriver unscrew and remove the (2) two 3 mm screws from the heat shield.
- Gently lift up on the heat shield to remove it.

Step 12

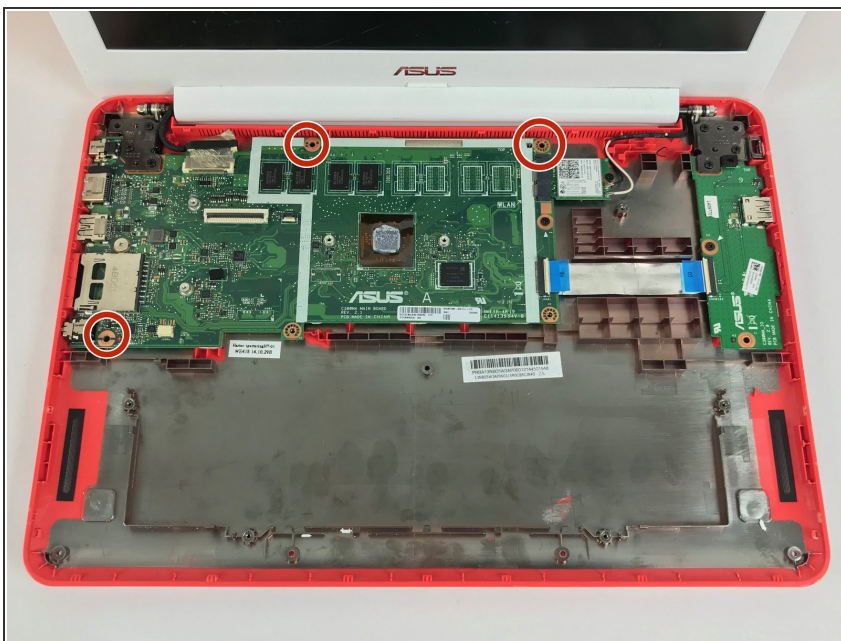

- Using the JIS J0 Screwdriver, unscrew and remove the (3) three 6mm screws from the left hinge.

Step 13

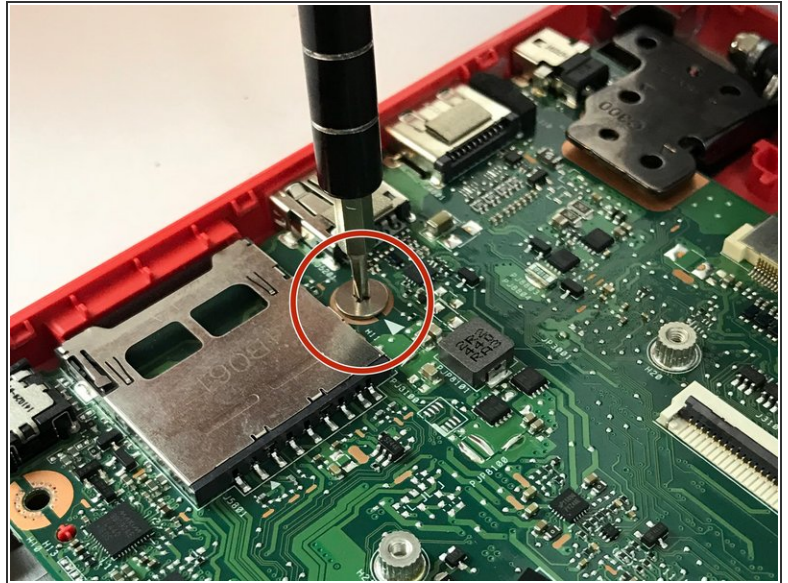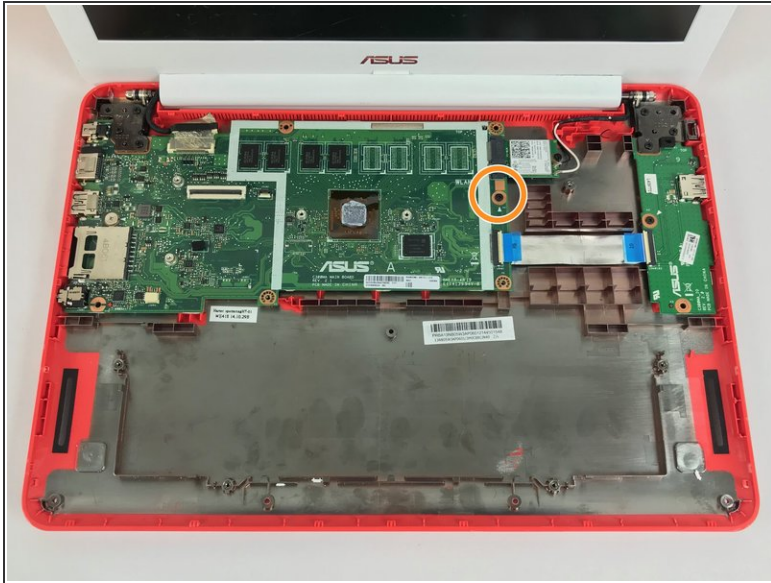

- Using the JIS J0 Screwdriver, unscrew and removing the following:
- (1) One 3mm screw from the right side of the motherboard.
- (1) One 4mm silver screw from the left side of the motherboard.
- ⓘ The motherboard can now be carefully removed from the device.

To reassemble your device, follow these instructions in reverse order.