




Oster BLSTSS-PZO Circuitboard Replacement

Replace the circuit board in your Oster Blender.

Written By: Tristian Cruz

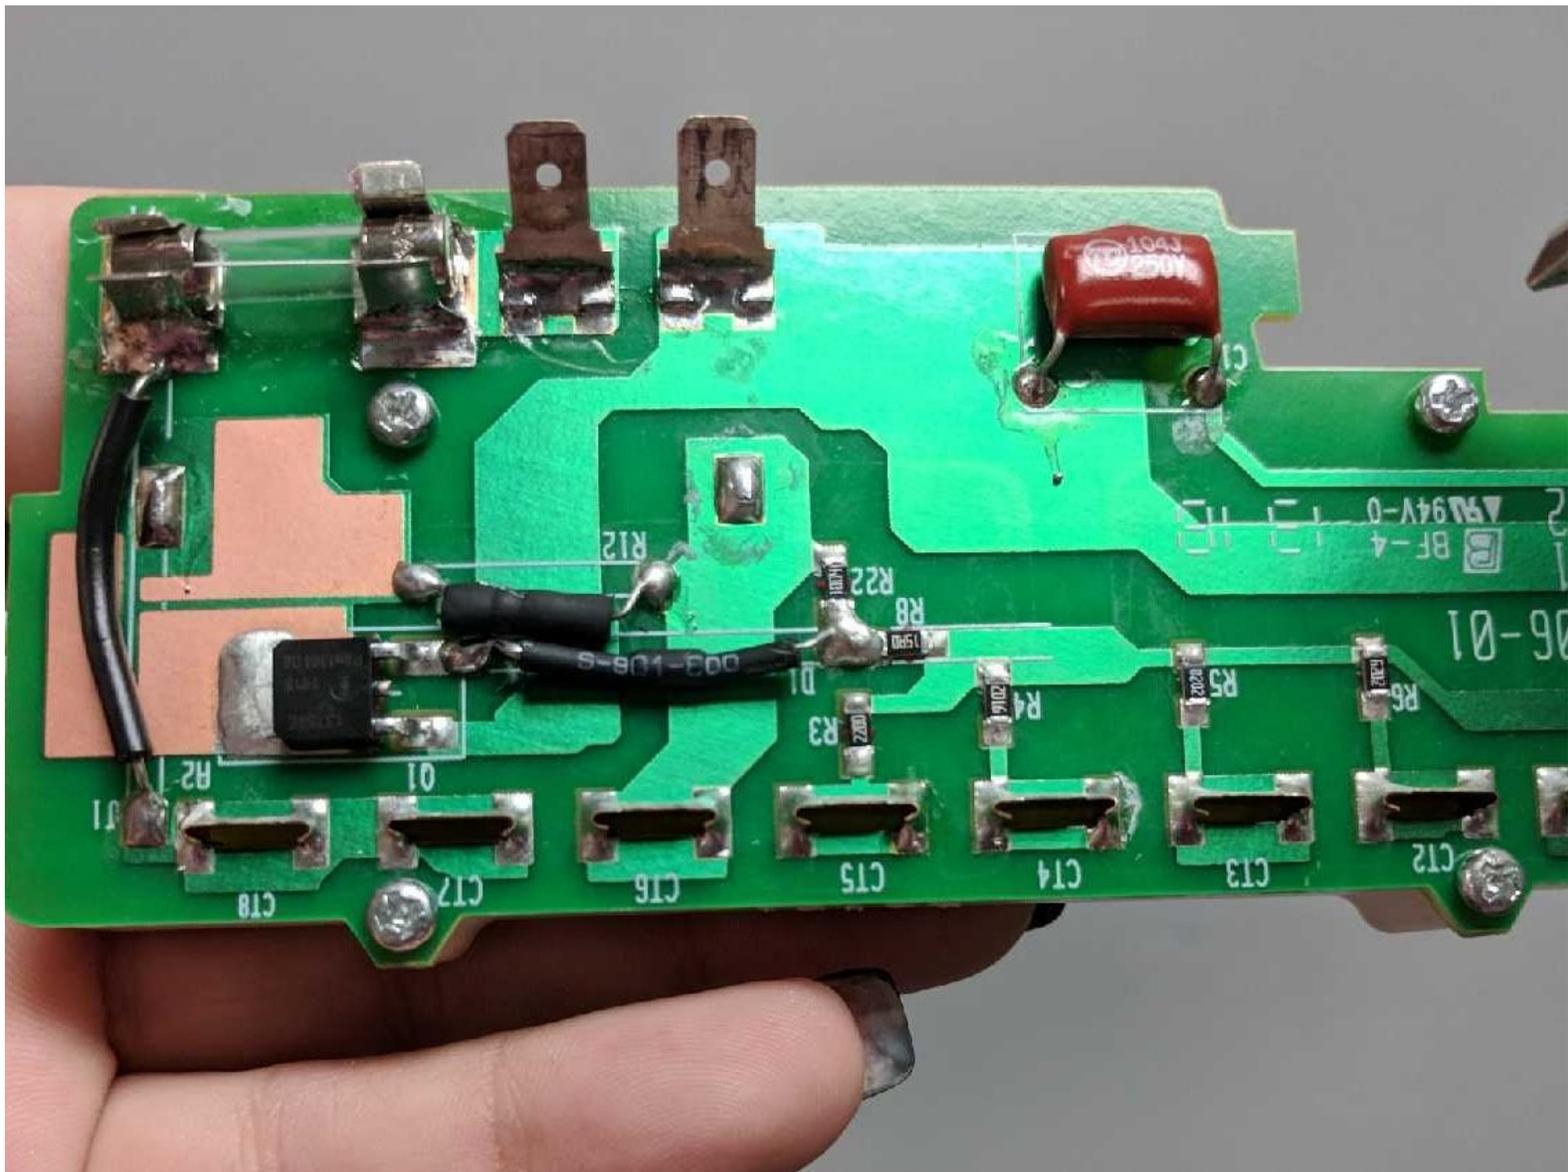

INTRODUCTION

The circuit board is the main control center of the blender.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Circuitboard



- Use the prying tools to open the four plastic screw holes on the bottom of the blender.

Step 2





- Use the Phillips #1 Screwdriver to unscrew the four 16 mm screws and remove the plastic bottom.

Step 3




- Gently remove the circuit board.

Step 4

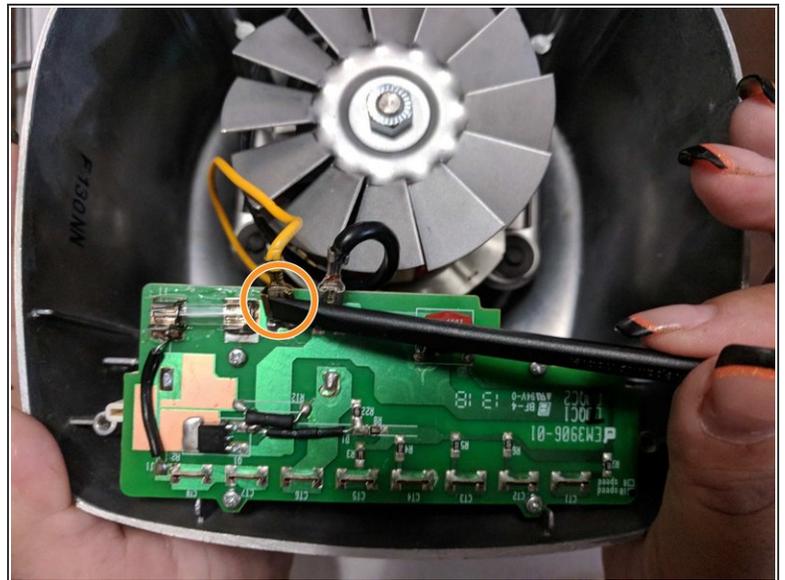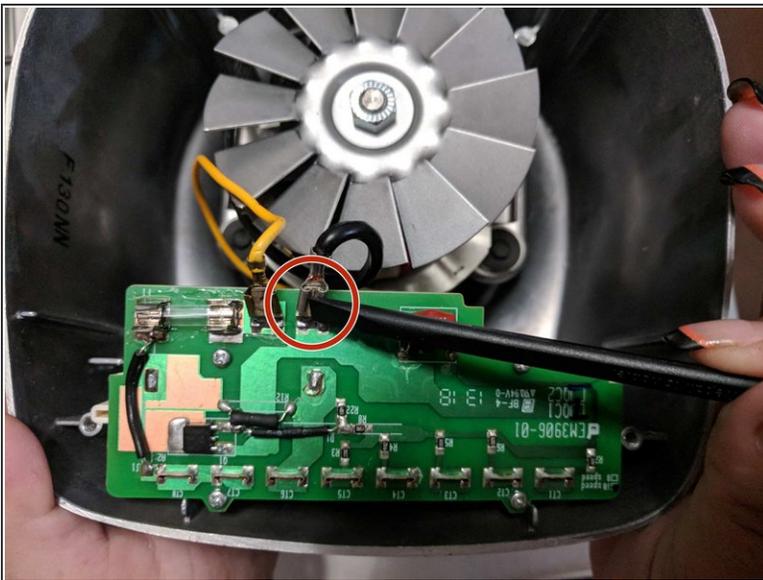

- Use the spudger to detach the black wire from the circuit board.
- Repeat for yellow wire.

Step 5

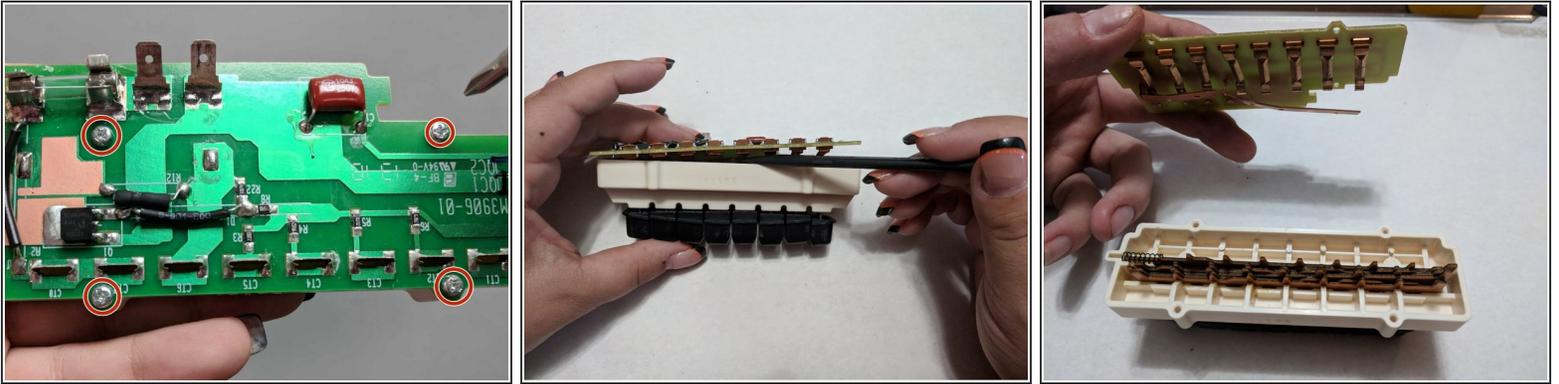

- Use the Phillips #1 to remove the four 8mm screws.
- Use the metal spudger to detach the circuit board from the buttons.
- Gently pull and release circuit board from buttons.

To reassemble your device, follow these instructions in reverse order.