

# **Qualcomm Snapdragon 800 Mobile**Development Antenna Replacement

Use this guide to replace the Qualcomm Snapdragon 800 Mobile Development Tablet's antennas.

Written By: Omar





- Spudger (1)
- Phillips Head Screwdriver: Size PH1 (1)

# Step 1 — Battery





- Locate your device.
- Flip device onto its back.

# Step 2



Remove the tablet's back cover.

## Step 3



- Locate the battery and remove it.
- If you wish to replace the battery you can do so here.

#### Step 4 — Back Panel





• Use the Phillips PH1 screwdriver to unscrew the five 4x2.5mm screws that hold the back cover.

# Step 5



Pop out the back cover.

## Step 6 — Antennas



 After removing the panel and the battery, your tablet should look like this.


# Step 7





- Locate the tablet's antennas.
- Remove the two 3x2.5mm screws holding them down.

# Step 8

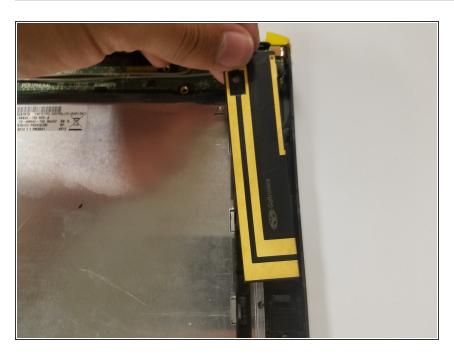

 Remove antennas and replace them as needed. To reassemble your device, follow these instructions in reverse order.