



Samsung NP350V5C-T02US RAM Replacement

This guide will help users locate where RAM is and replace it.

Written By: Wanjun Xu



INTRODUCTION

This guide helps users to replace the RAM successfully by following these easy steps.

TOOLS:


- [Tweezers](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — ODD/HDD/Memory Cover




- Flip the laptop over so that the bottom is facing toward you.

Step 2

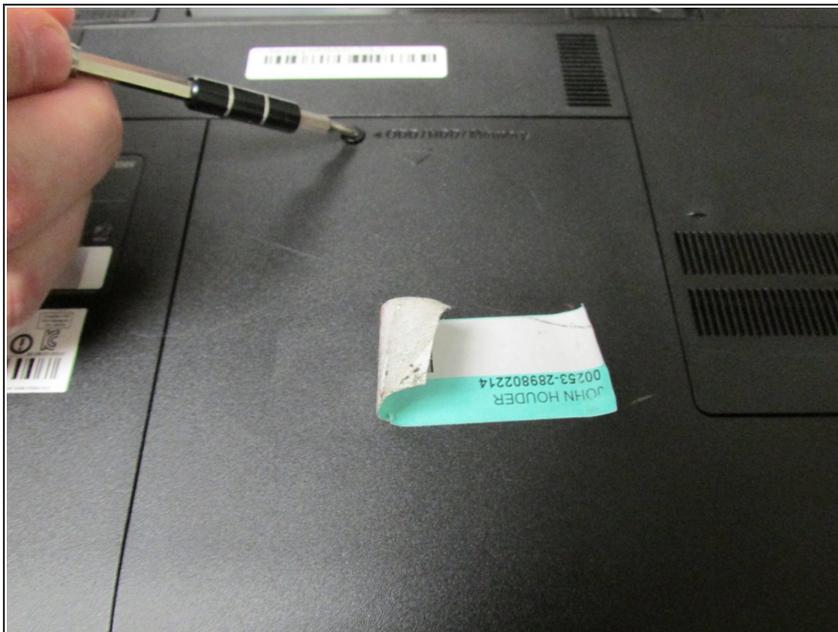


- Using the Phillips #1 screwdriver, remove the M2.5X5 mm screw to take the back cover out.

Step 3

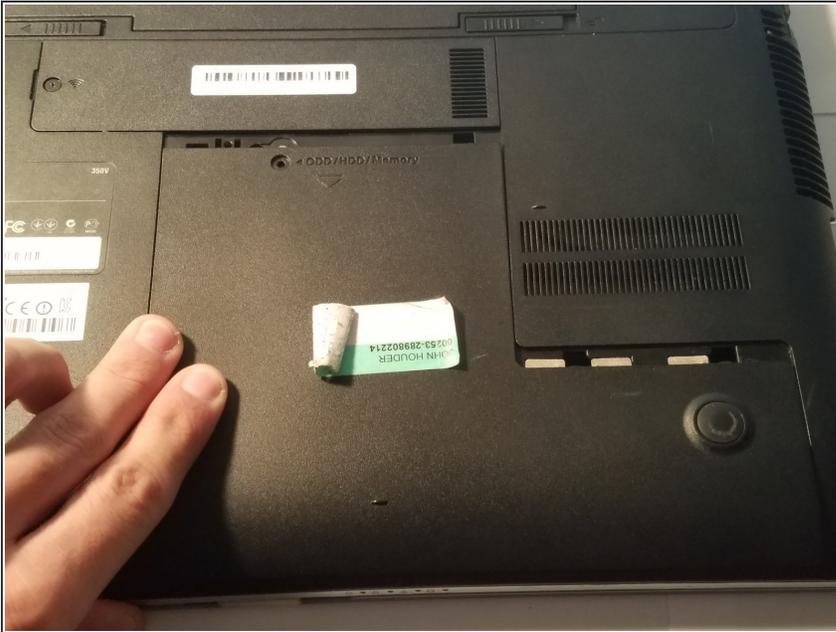

- Using your hand slide the ODD/HDD/Memory panel off in a downward motion.

Step 4 — RAM

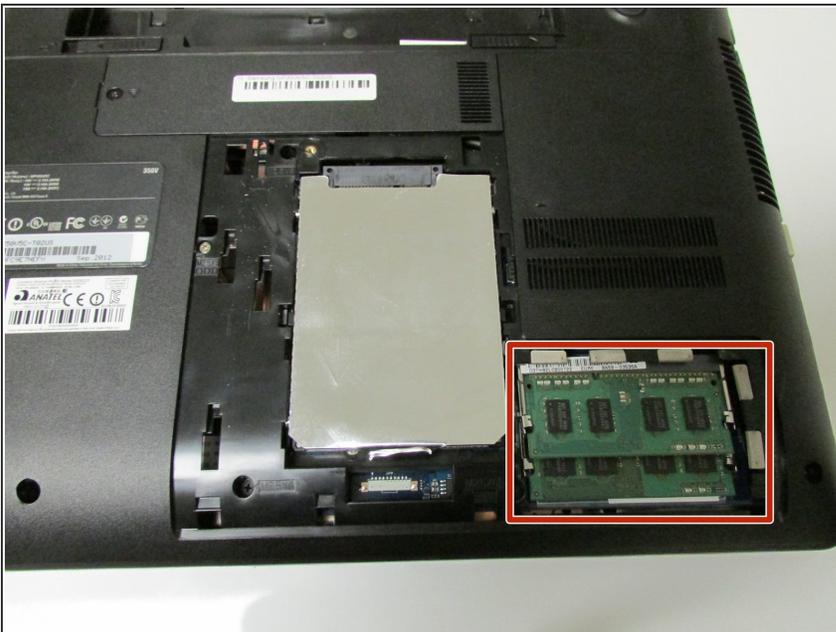

- Locate the RAM in the lower right hand corner.

Step 5



- Depress both sides of the lock mechanism at the same time using tweezers to remove the RAM.
- Since there are two RAMs, remove the other one by using the same method.

Step 6



- After removing all RAMs, the empty space looks like this. Then users can install the new RAMs.

To reassemble your device, follow these instructions in reverse order.