



Droid Ultra XT1080 Power Button Replacement

This guide will show you how to properly...

Written By: knoyes



INTRODUCTION

This guide will show you how to properly replace the power button on your Motorola Droid Ultra XT 1080

TOOLS:



[iFixit Opening Tool](#) (1)

[Spudger](#) (1)

[T5 Torx Screwdriver](#) (1)

[T4 Torx Screwdriver](#) (1)

Step 1 — Power Button

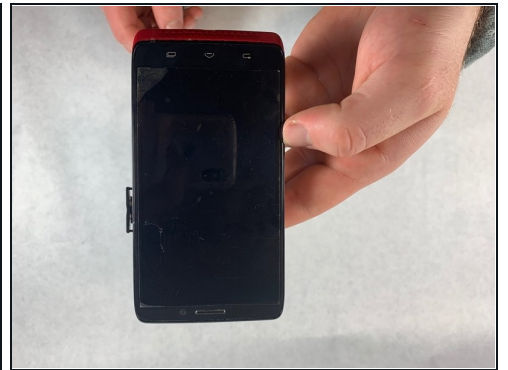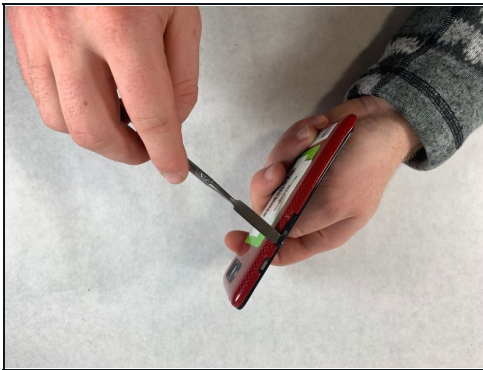

- Gently remove the SIM card tray from the device using a spudger.


Step 2



- After SIM card removal press the spudger between the plastic case and the frame until you hear a snap.
- Work your way around the device until all the clips are released.

⚠ Be gentle while doing this so you don't crack or break the plastic.

Step 3

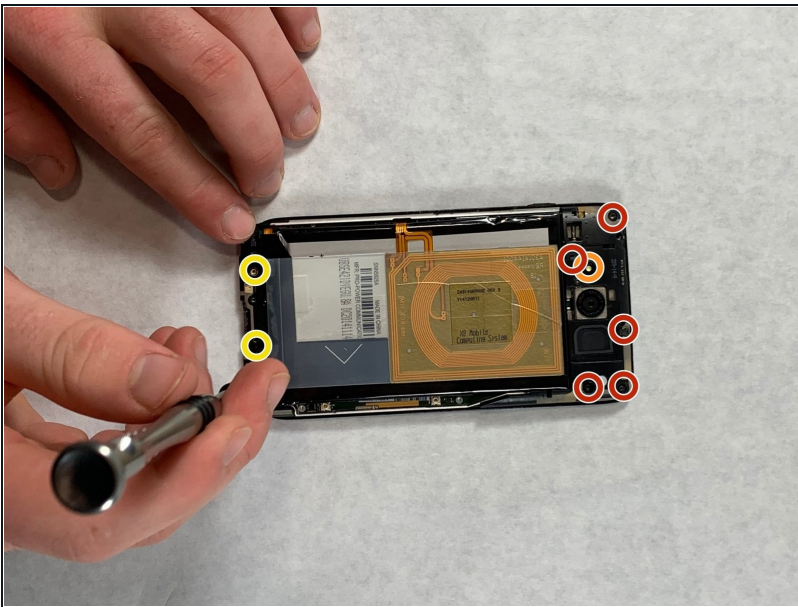


- Remove the five screws on top of the device with a T5 Torx.
- Remove the single screw holding the camera with a T4 Torx.
- Remove the two screws on the bottom of the device with a T5 Torx.

Step 4




- Once the screws are removed, use a nylon spudger and lift up on the two plastic pieces that were secured by the screws.

Step 5

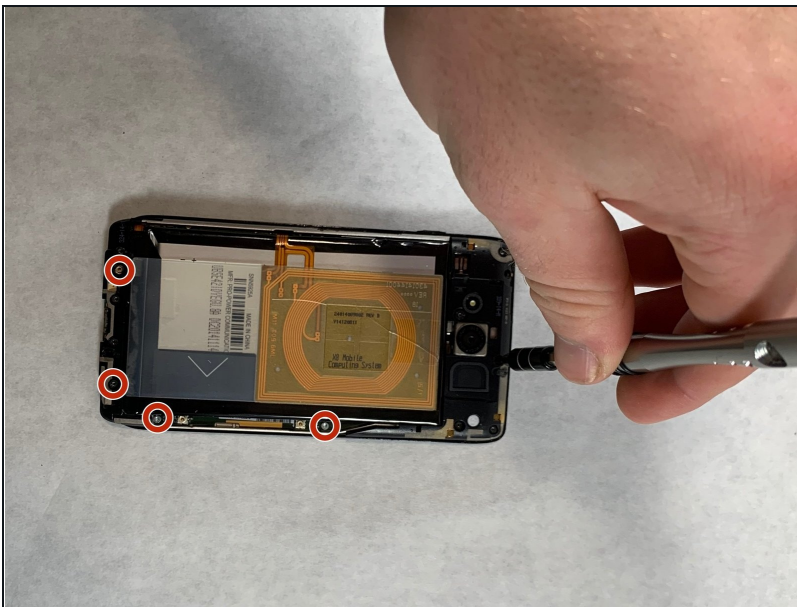



- Remove the four T5 Torx screws securing the motherboard.

Step 6

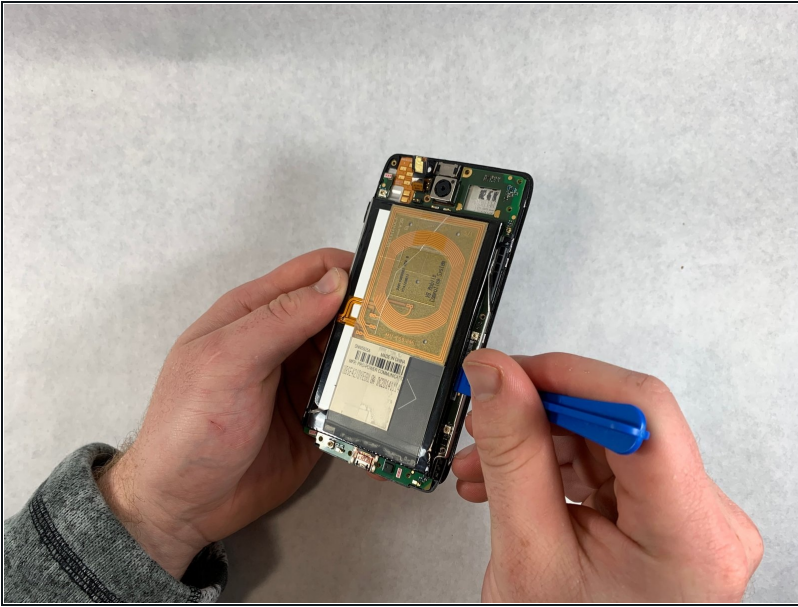

- Gently pry the motherboard out of the frame using the plastic opening tool.

Step 7

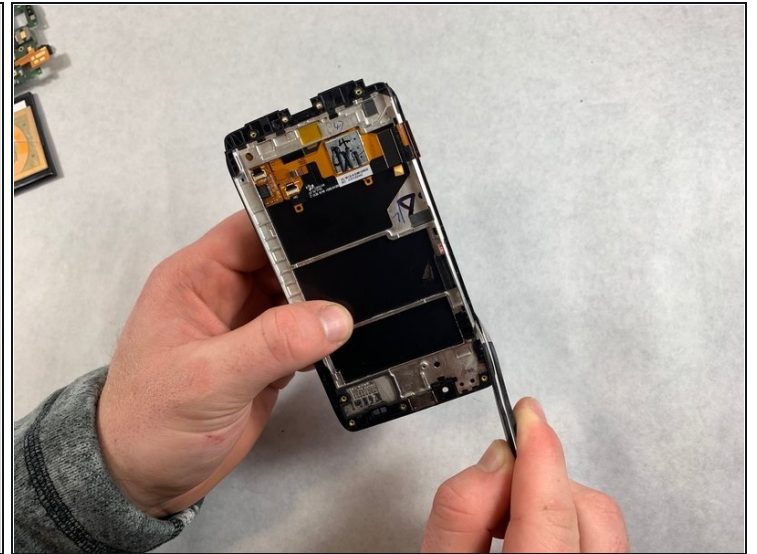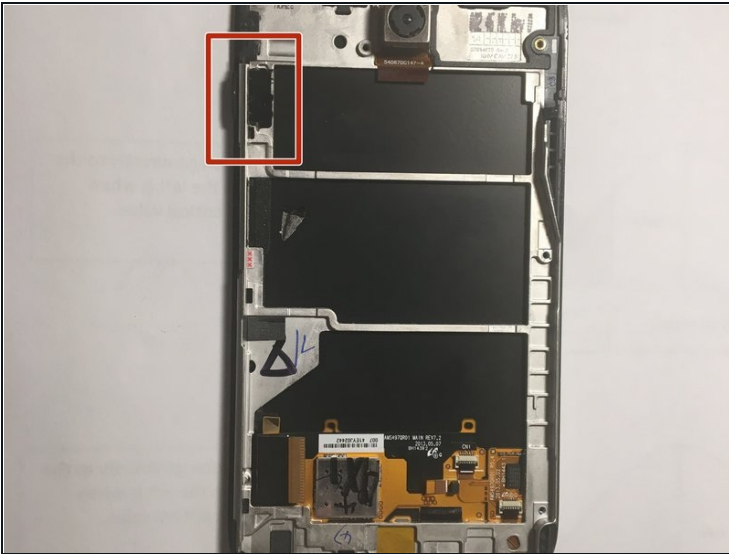

- Once motherboard is removed you have gained access to the power button.
- Gently, using a pair of angled [tweezers](#) pull on the power button to remove it.

To reassemble your device, follow these instructions in reverse order.