




RAM memory replacement for why! W253EU

Here you will learn how to change the RAM on...

Written By: Felice Suglia

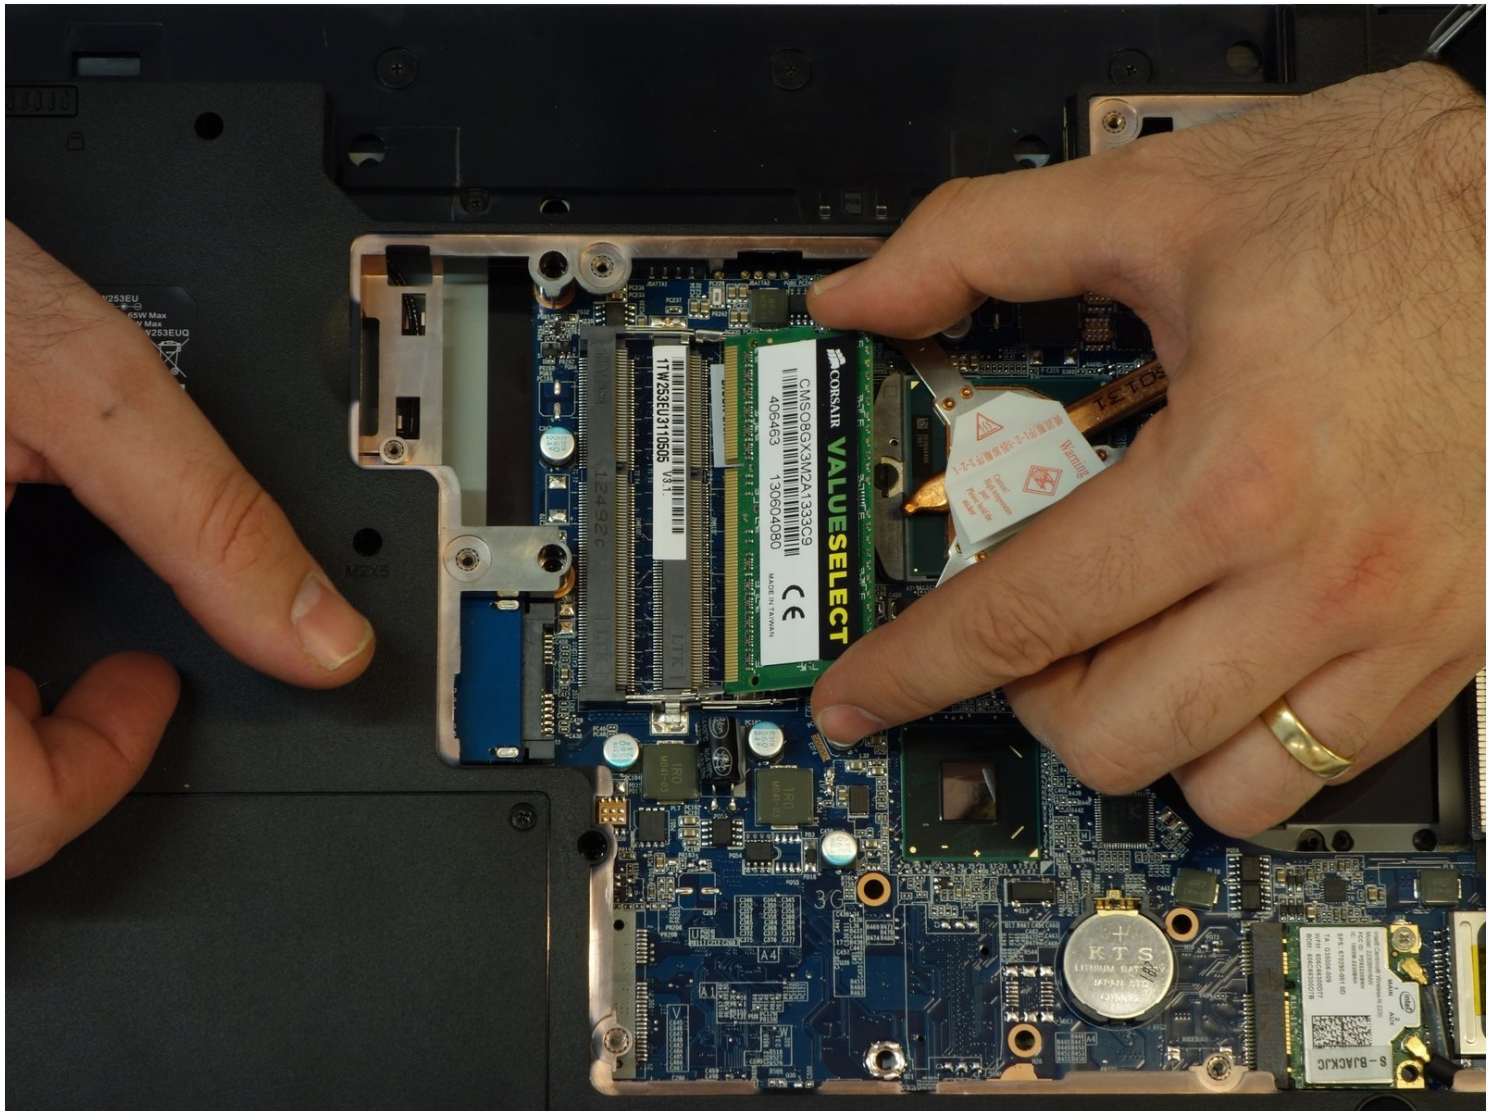

INTRODUCTION

Here you will learn how to change the RAM on the PC why! W253EU.




PARTS:

RAM Speicher Modul 8GB (1)

Kingston Technology SO-DDR3 1600MHz 8GB


from why! open computing shop

Step 1 — Battery from why! Remove W253EU

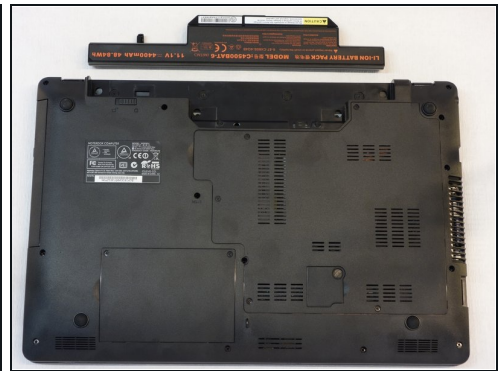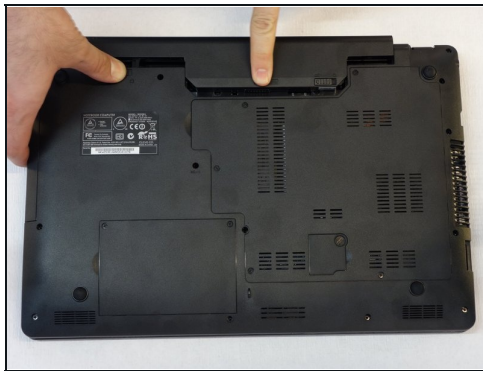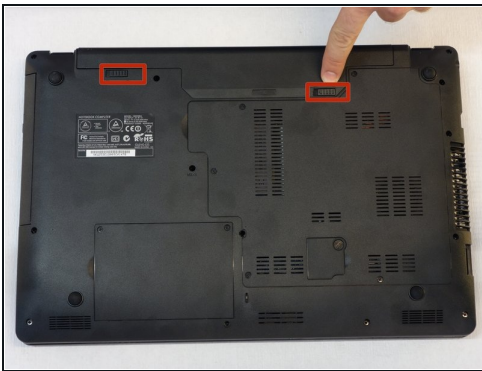


- Turn off the computer.
- ① Before each operation it is important to start with the removal of the accumulator.
- Take the slide unlocked into position, remove the battery.

Step 2 — Access to RAM and CPU from why! W253EU

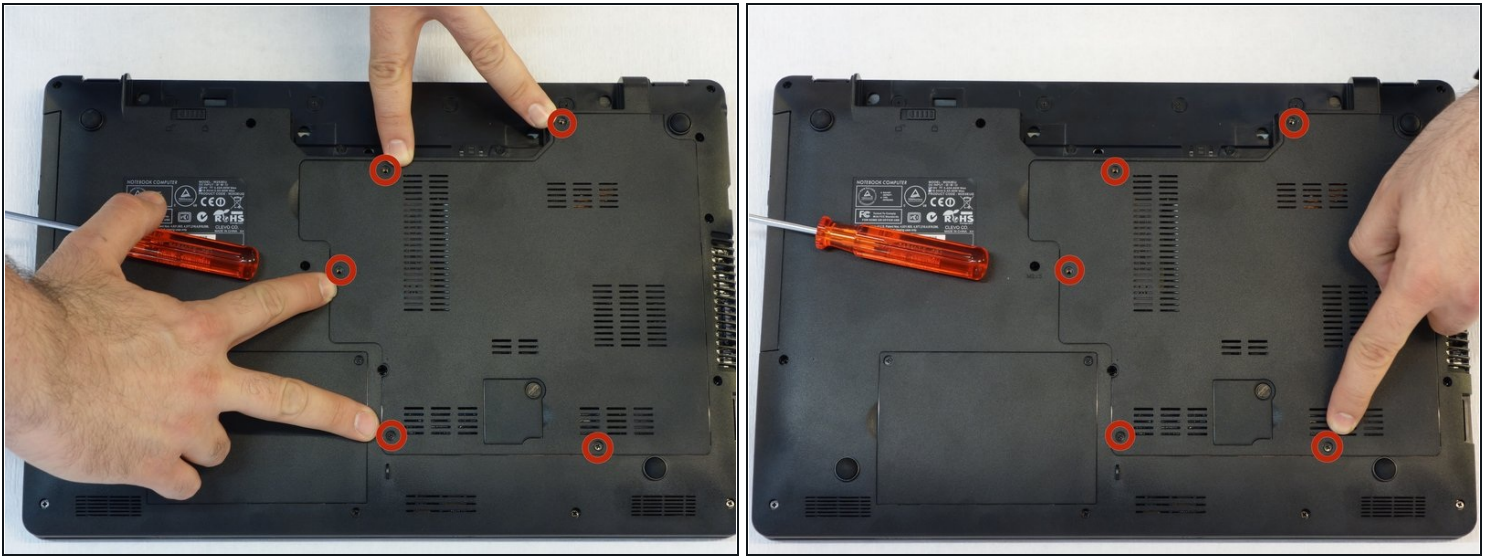


- Using a Philips #1 screwdriver, unscrew the 5 screws securing the cover.

Step 3

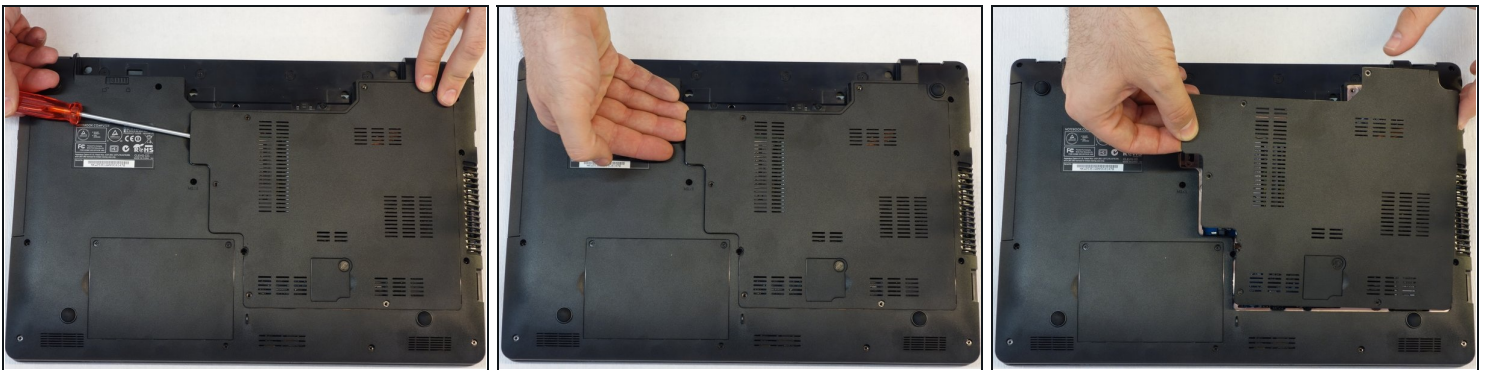



- Push the screwdriver a few millimeters under the cover so that it can be touched with your fingers.
- Now lift the cover carefully.
- Attention! Disconnect the ventilator cable so that the cover can be completely removed (see next step).

Step 4

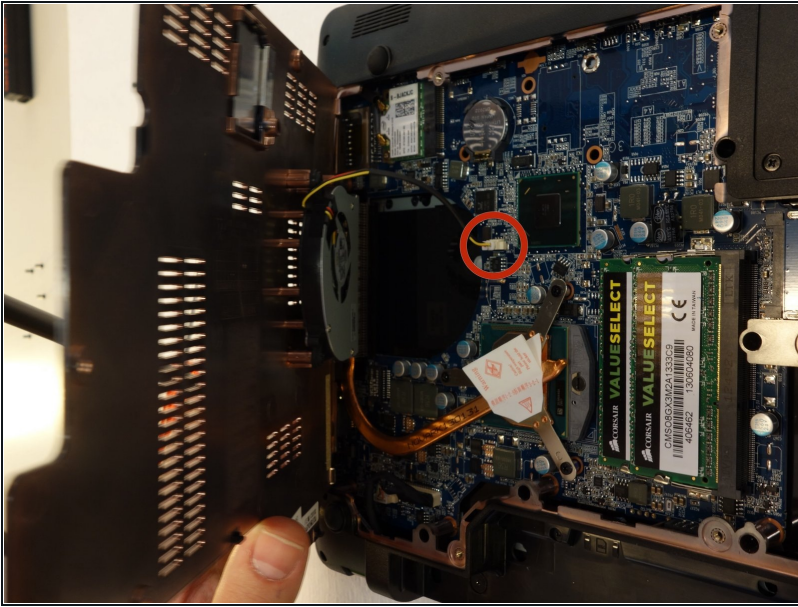


- Since the ventilator is mounted under the cover, its power supply cable must first be disconnected so that the cover can then be completely removed.

Step 5 — RAM memory

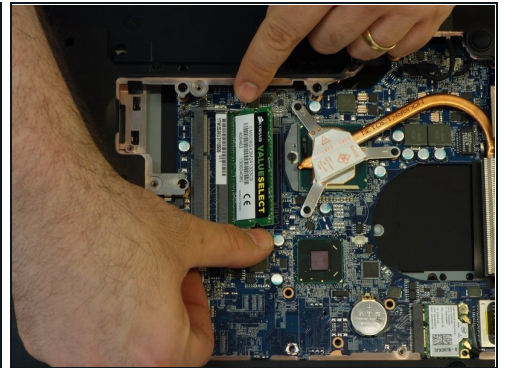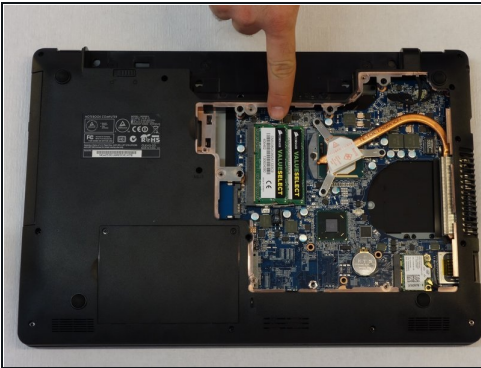

- Locate the two memory modules.
- Release the locking spring on both sides of the module.
- Now lift the module with its connector slightly.

Step 6

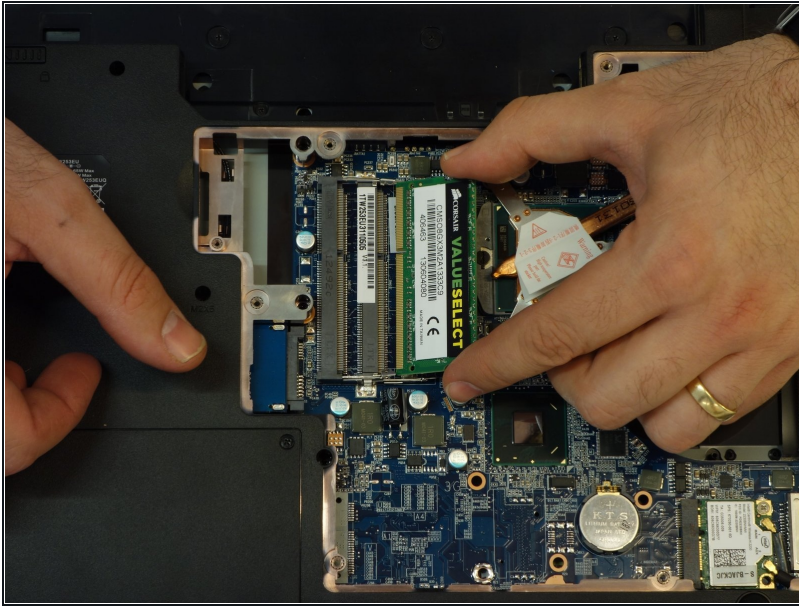

- Now remove the module from its connector by pulling it out symmetrically to its axis.
- If necessary, repeat the procedure from the previous step with the second module.
- Attention: the two memory modules must be identical, mainly in terms of their memory capacity!

To reassemble, follow the instructions in reverse order.