



MAGNAVOX MDV2300 Motherboard Replacement

This guide will step you through the moderately easy process of how to replace the motherboard on your Magnavox MDV2300 DVD Player.

Written By: Justin



INTRODUCTION

To begin this guide please have with you all the required material and components. This guide should not take very long, depending on your skill level.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)



PARTS:


- [Magnavox MDV2300 Motherboard](#) (1)

Step 1 — Motherboard




- Look the device over.
- Make sure the device is unplugged from the wall.

Step 2

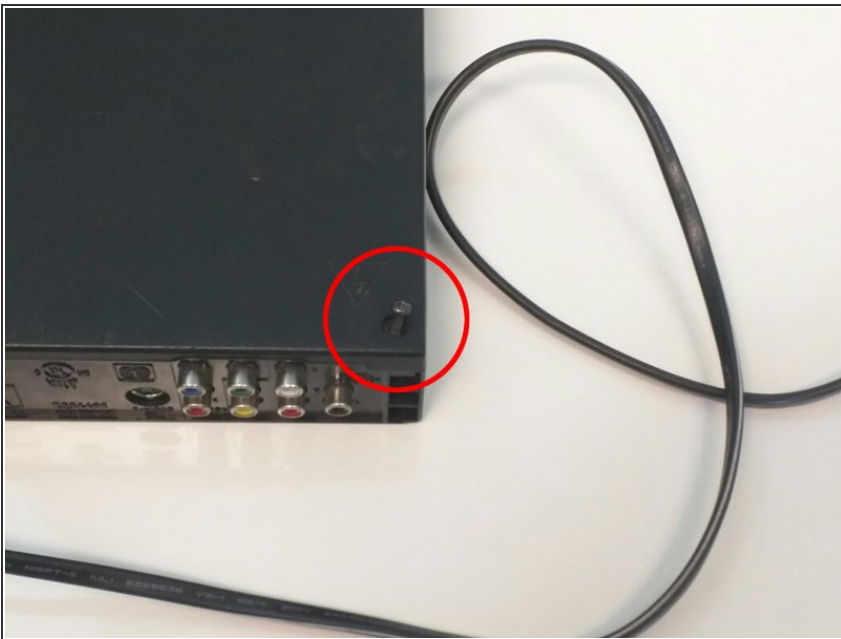


- Remove two screws on top panel.

Step 3

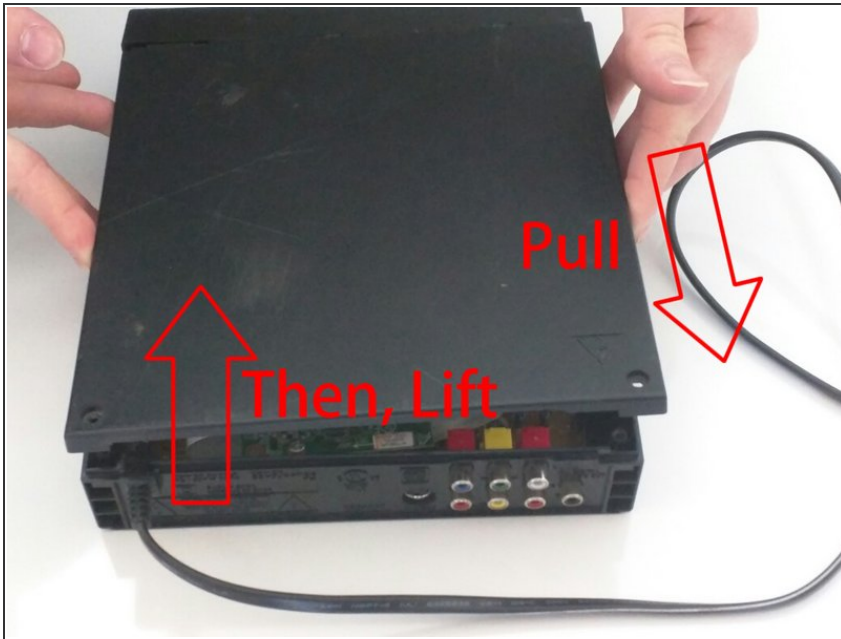

- Take top panel off of device.

Step 4

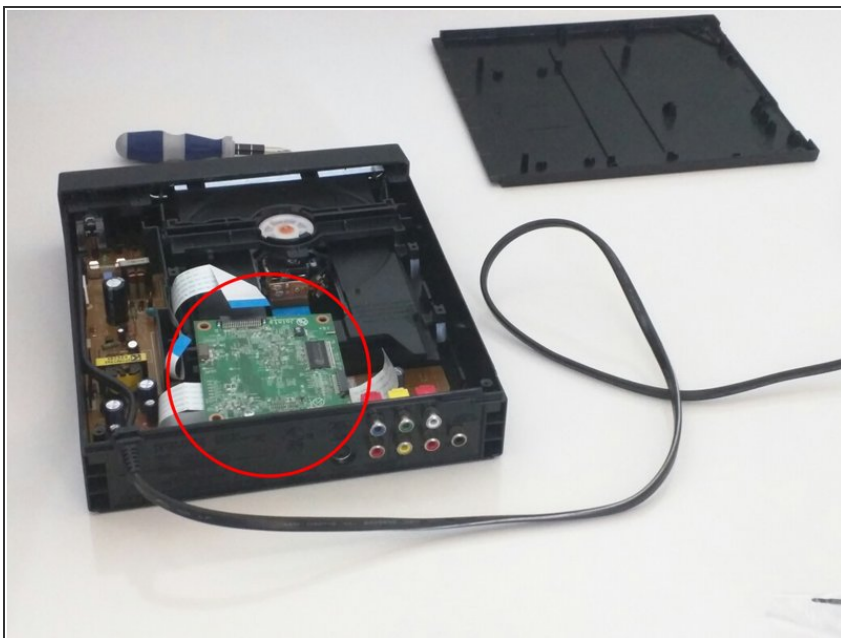

- Identify the motherboard.

Step 5



- Unplug wires from motherboard component. Do not be afraid to tug. The wires are strong and should not tear.

Step 6



- ★ When installing motherboard back into device make sure wires are snug in their casings.

To reassemble your device, follow these instructions in reverse order.