




Palm Zire m150 Headphone Jack Replacement

Your first step should be to check if the headphone plug is dirty and if the speakers still do not work, they might need to be replaced.

Written By: Kate

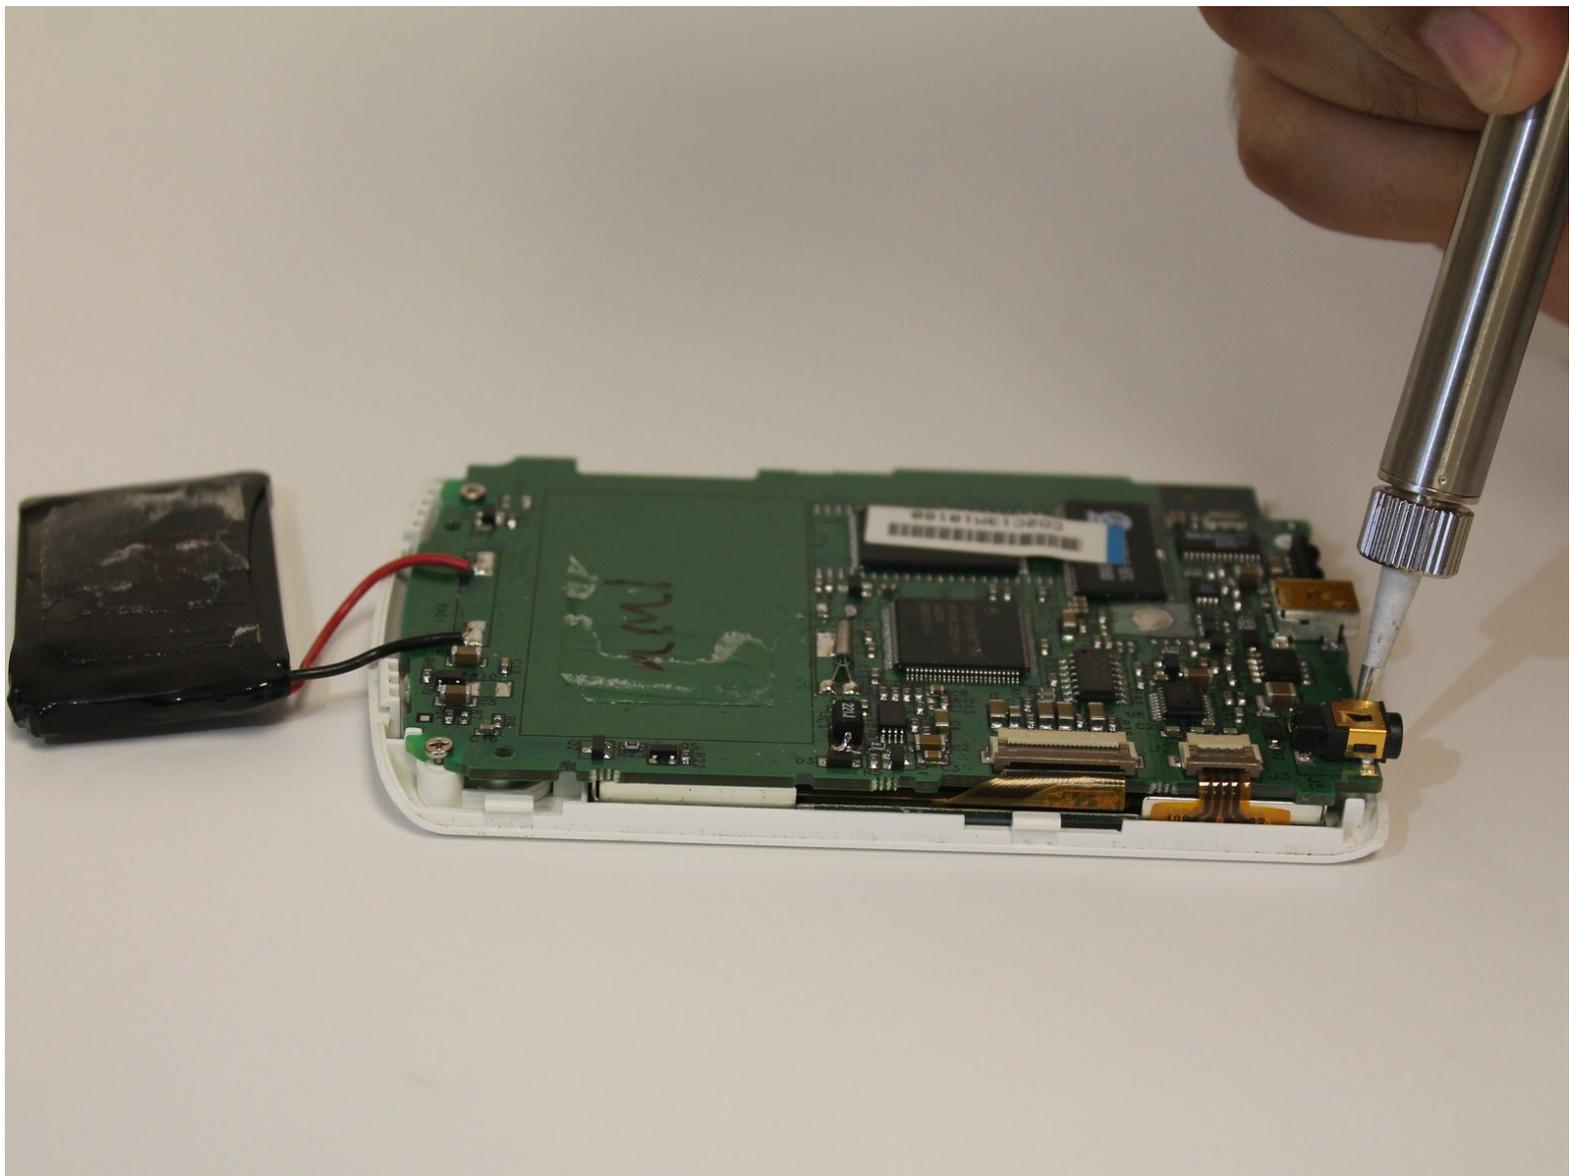

INTRODUCTION

This guide will teach you how to replace the audio on your Palm Zire m150. If you don't need to replace it, it will also teach you how to take the device apart in order to clean the control button.

TOOLS:

- [Soldering Iron](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [64 Bit Driver Kit](#) (1)
-

Step 1 — Headphone Jack



- Remove cover, also known as the flap from the Palm Zire m150.
- ⓘ For the purpose of this guide and being able to see clearly, we removed the flap completely. You can keep your flap on if you wish.

Step 2




- Remove both screws on the back.
- Turn screw driver counterclockwise to remove screw
- ⚠ Be careful not to strip screws

Step 3



- Remove the front part of the device from the bottom part of the device.
- Separate front cover from back cover.
- ⚠ Be careful not to break the connector that connects the screen to motherboard.

Step 4

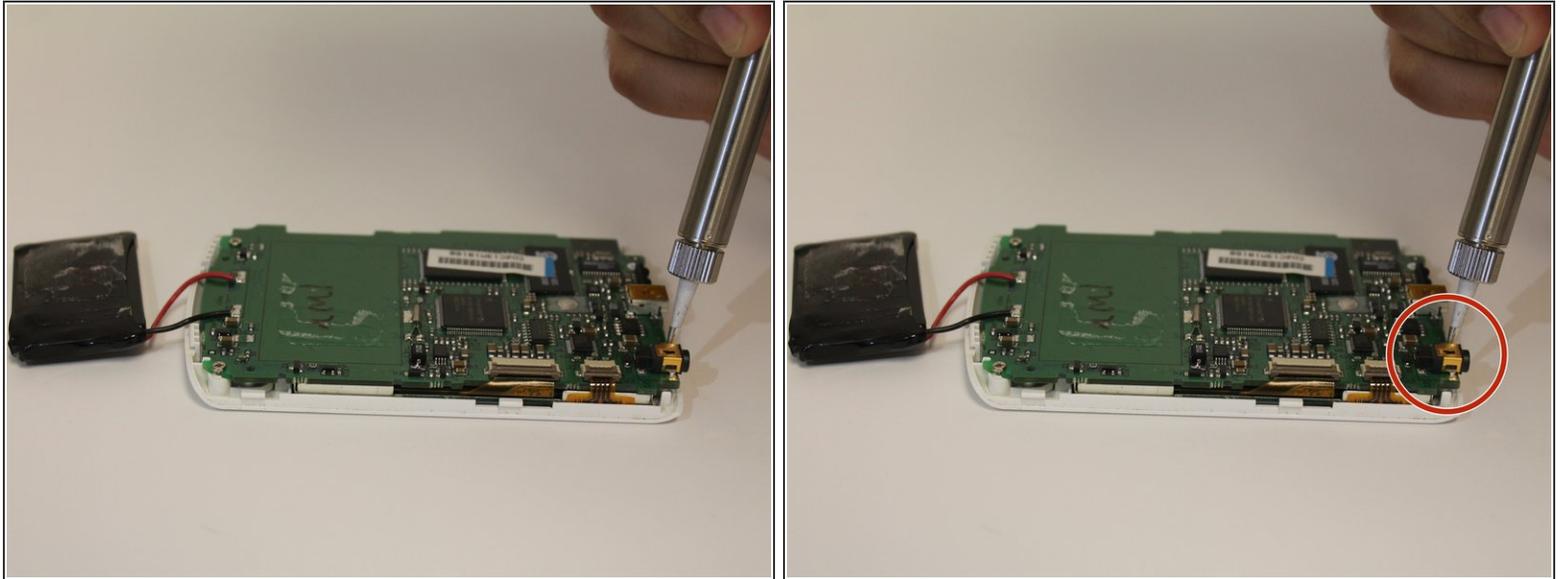

- Insert NEW audio piece into the top case housing.
 - On the NEW audio piece, use a soldering iron to solder.
- ⚠ Let solder cool before reassembling unit.
- 🔧 Soldering iron needs time to warm up in order for use

To reassemble your device, follow these instructions in reverse order.