




Lenovo Yoga 700-11ISK Power Port Replacement

Is your computer not turning on despite being...

Written By: Emma Morley

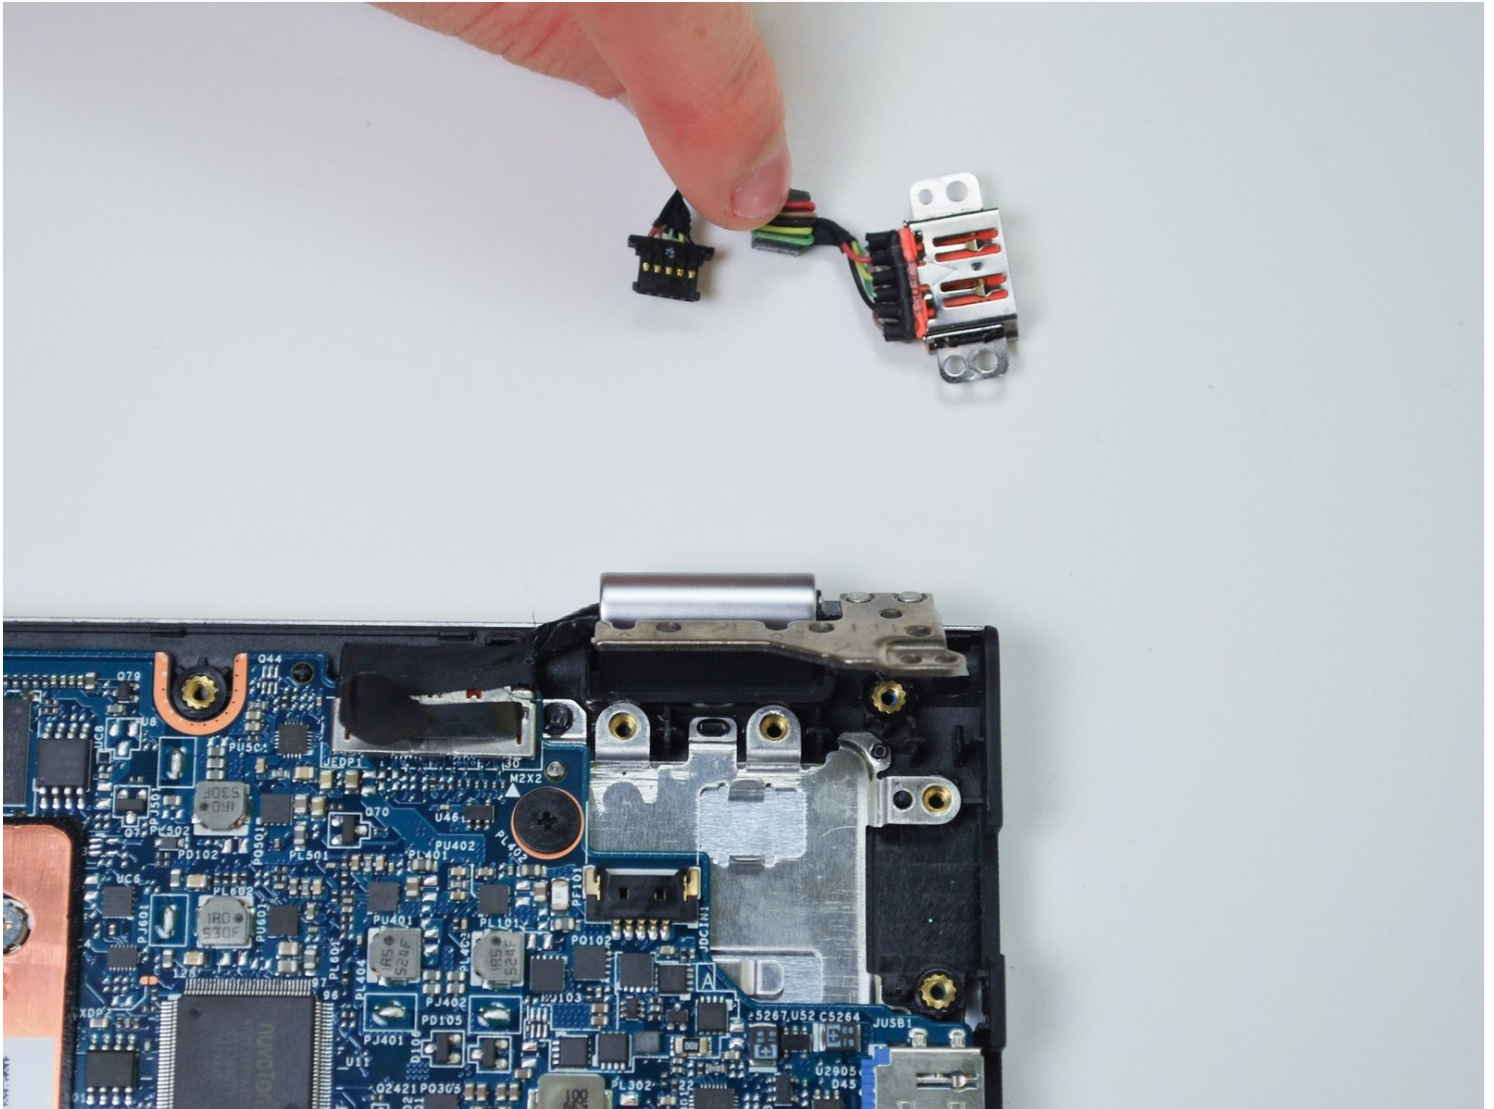

INTRODUCTION

Is your computer not turning on despite being plugged in all night, even though you know your power adapter is fully functioning? Your power port may be faulty. This guide will walk you through how to replace the power port on your Lenovo Yoga 700.

TOOLS:

TR7 Torx Security Screwdriver (1)
Phillips #1 Screwdriver (1)

PARTS:

Lenovo IdeaPad Yoga 700-11 DC-IN
Cable (1)

Step 1 — Back Panel



- Flip your device so that the bottom panel is facing up.
- Remove the eleven 5mm Torx T5 screws from the back panel.

Step 2




- Use a spudger to unclip clips on the front and near the USB ports on each side
- Lift the back panel off

Step 3 — Battery



- Remove the two 3mm Phillips #1 screws holding the battery to the laptop chassis.
- Disconnect the battery from the IO board by holding the connector by the sides and gently pulling the connector out.



Step 4

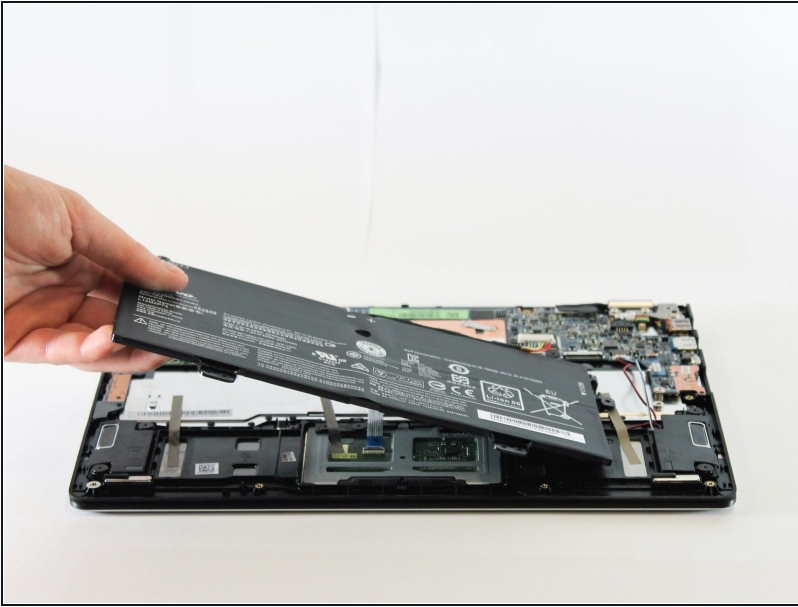

- Carefully remove the battery from the laptop.


⚠ Make sure that all wires still connected to the laptop are out of the way and not pulled out with the battery.

Step 5 — Power Port

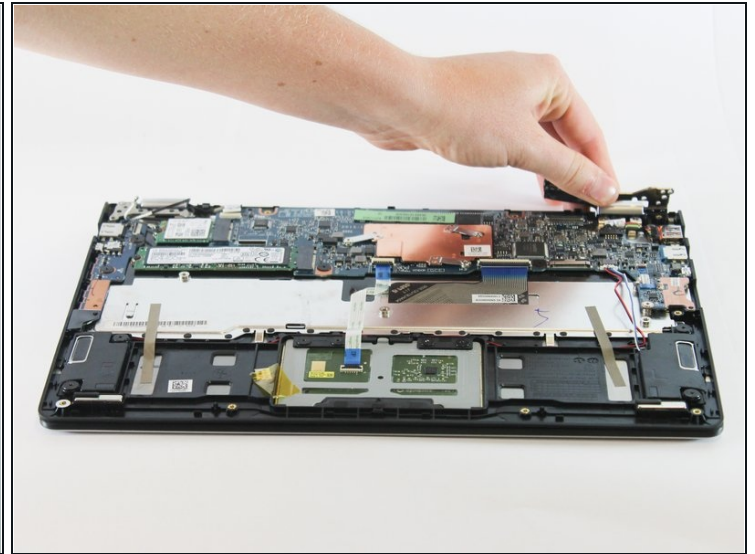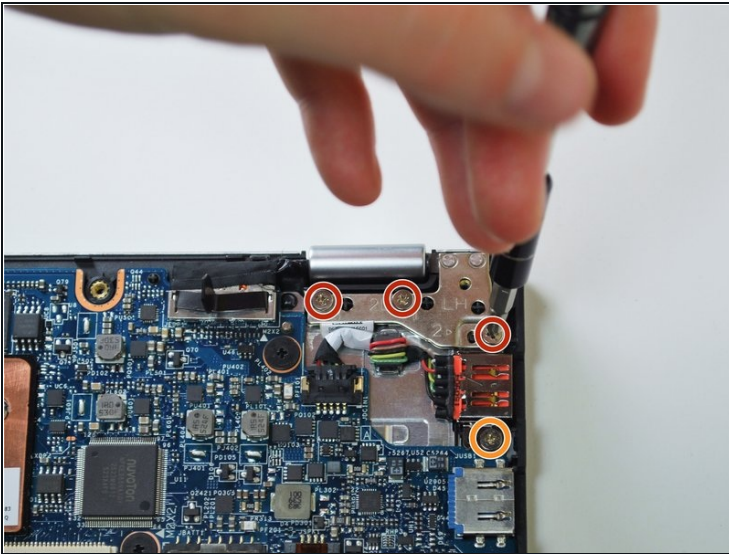

- Remove the following screws holding both the right LCD hinge and the power port to the laptop:
 - Four 5mm Phillips #1 screws.
 - One 3mm Phillips #1 screw.
- Gently pull the hinge up and away from the laptop.

Step 6

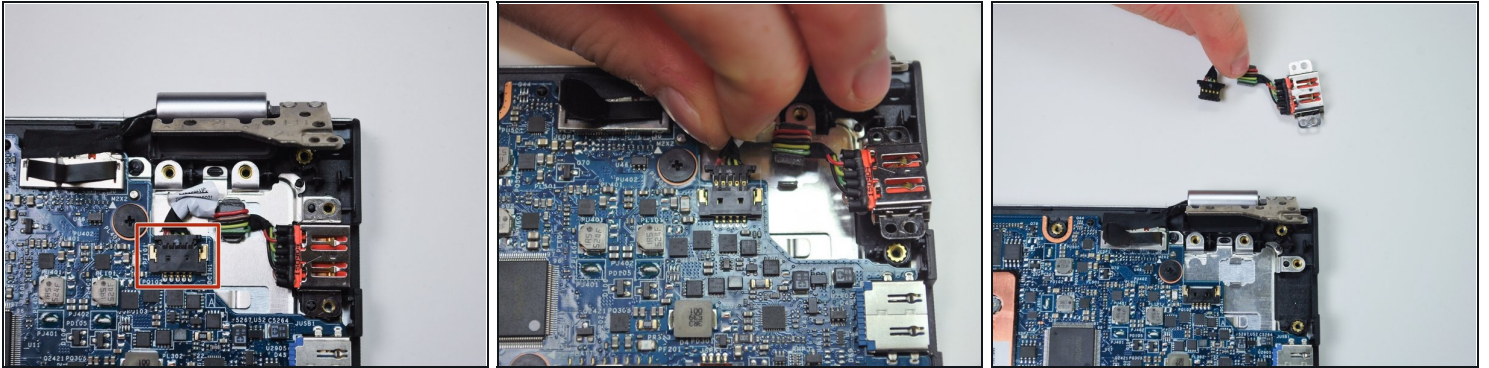

- Carefully slide bundle cable connector out from its connector on the motherboard.
- ⚠ Pull the ends of the black connector containing the wires to avoid damage to the wires.
-

To reassemble your device, follow these instructions in reverse order.