




Uniden Guardian G955 Power Button Replacement

Successfully instruct user on how to replace the monitor's power button.

Written By: Pauline Lara

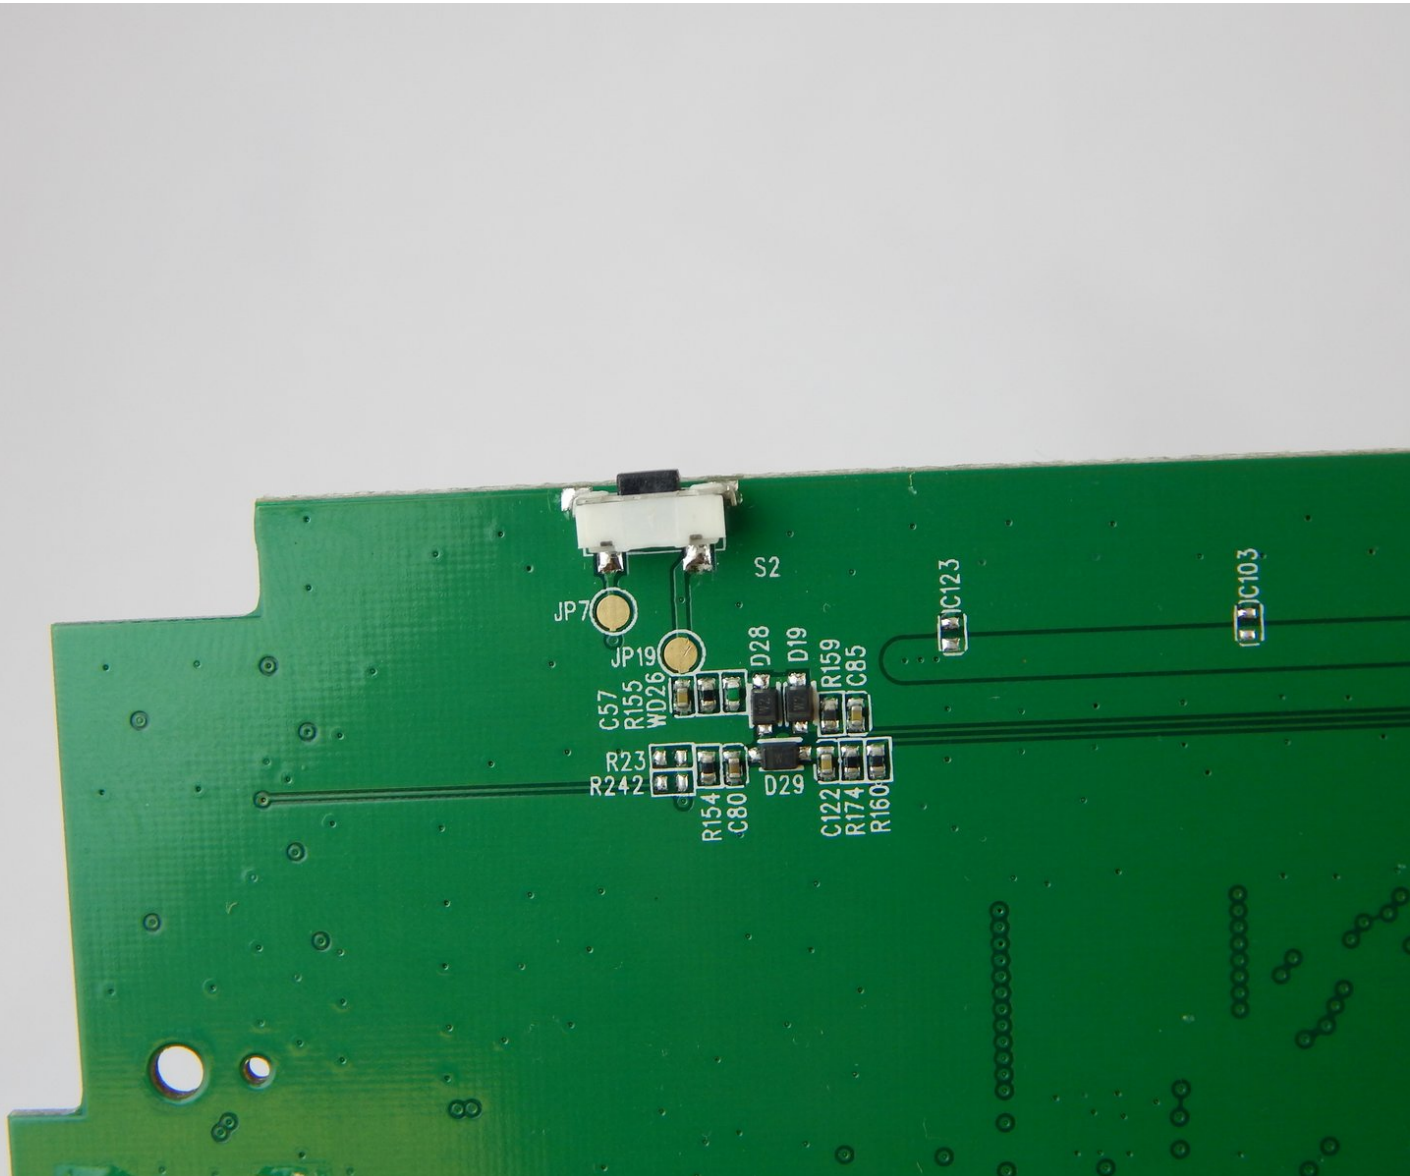

INTRODUCTION


This replacement guide will require a soldering tool and various other iFixit tools.



TOOLS:

- [J1 Screwdriver Bit](#) (1)
 - [Metal Spudger](#) (1)
 - [Soldering Iron](#) (1)
-

Step 1 — Power Button

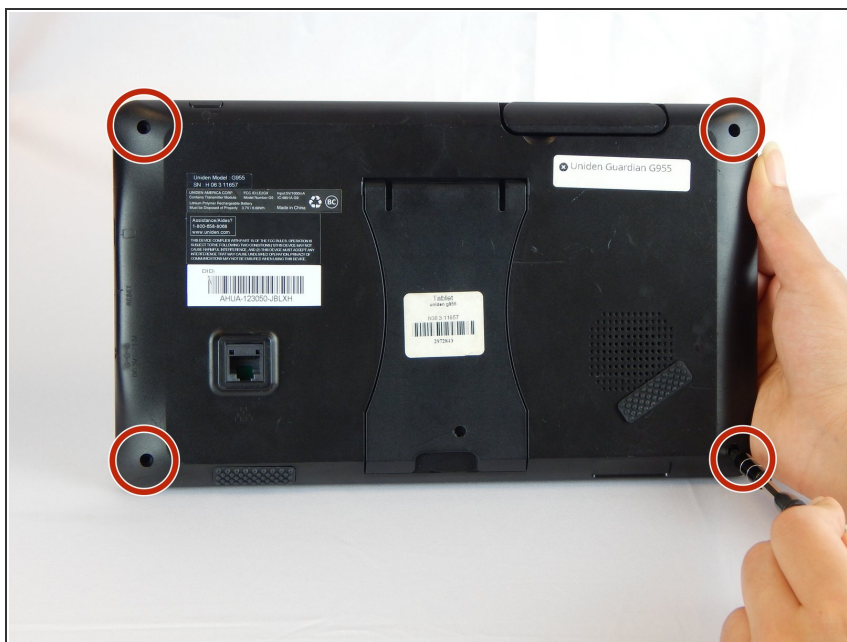


- Use a J1 Phillips screwdriver to remove the four 6.1 mm screws at the back of the monitor.

Step 2






- Use a metal spudger or an opening tool to pry open the device.

Step 3

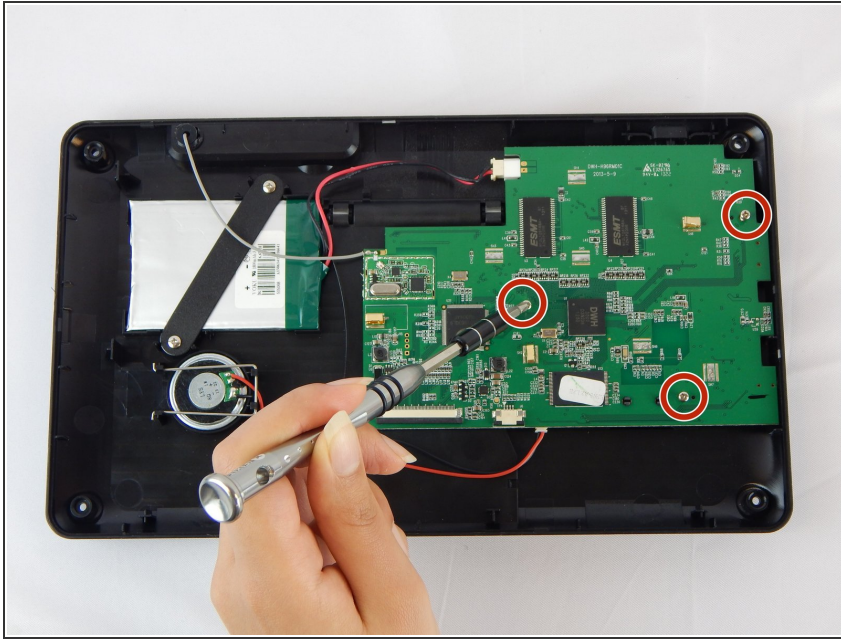

- Use a J1 Phillips screwdriver to remove the three 6.1 mm screws on the motherboard.

Step 4

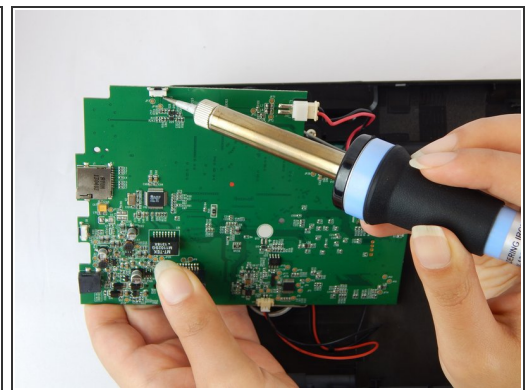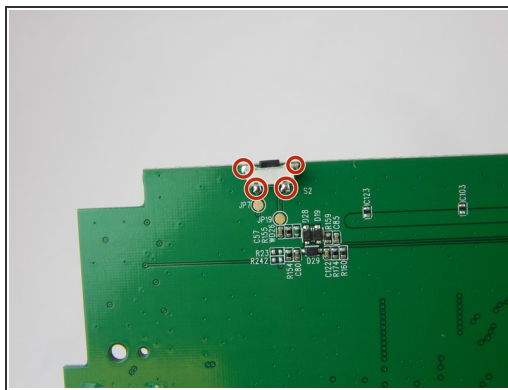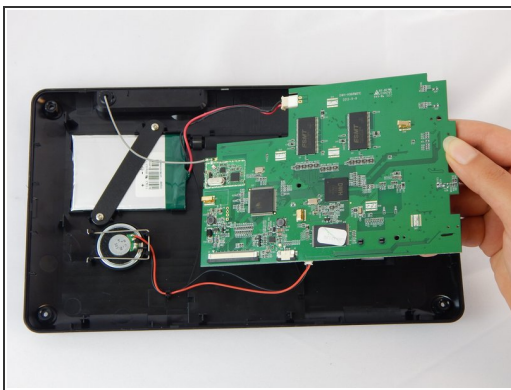

- Carefully, lift the motherboard and turn it to the backside.
- Desolder the four corners of the power button. Please follow this link on how to proceed to desolder: [How To Solder and Desolder Connections](#)

To reassemble your device, follow these instructions in reverse order.