




Asus X5511M-RCLN03 Optical Drive Replacement

This is a guide to help replace the optical drive in your Asus X5511M-RCLN03.

Written By: Andrew Hemphill

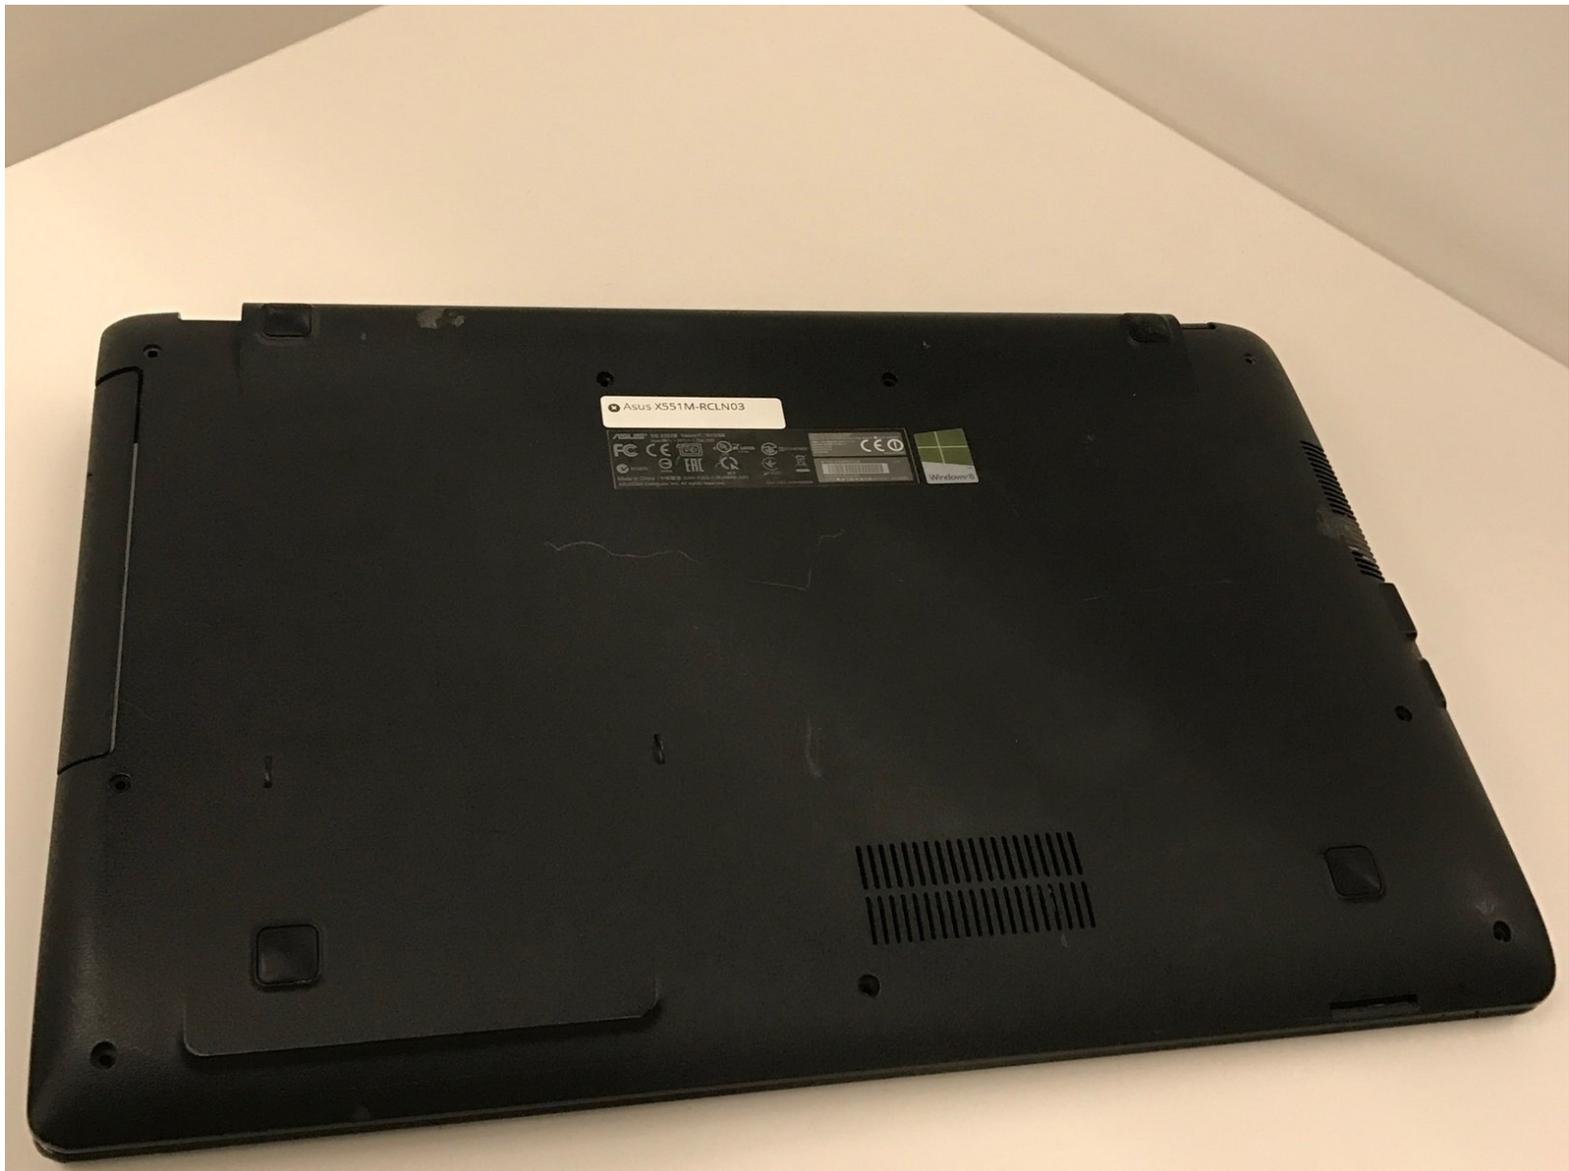

INTRODUCTION

This guide will instruct you on how to replace the optical drive in your Asus X5511M-RCLN03 laptop.

TOOLS:


- [Heavy-Duty Spudger](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Optical Drive




- Position the laptop with the back cover facing upward.

Step 2

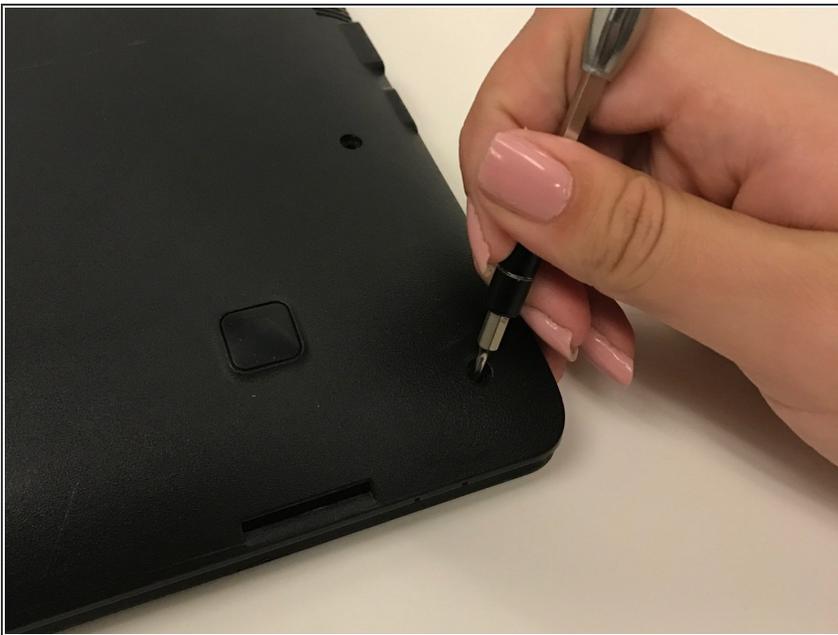


- Remove all nine 4 mm screws from the back cover.

Step 3

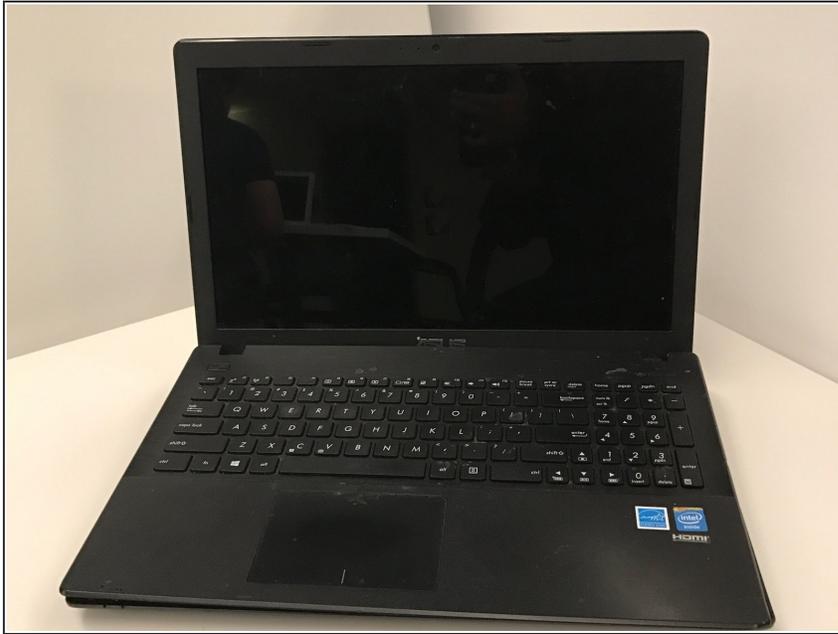


- Open the laptop with the keyboard facing upward."

Step 4

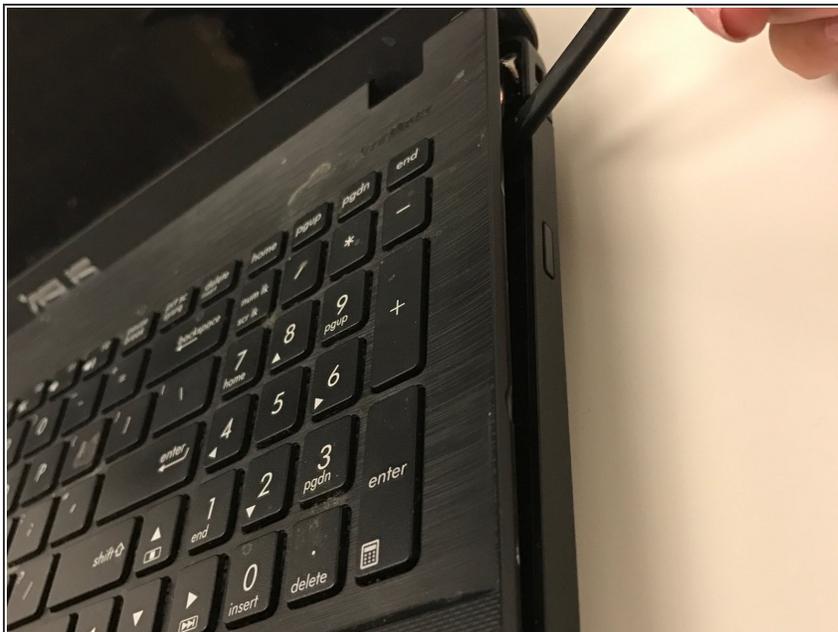


- Pry up the keyboard using a plastic spudger.

Step 5

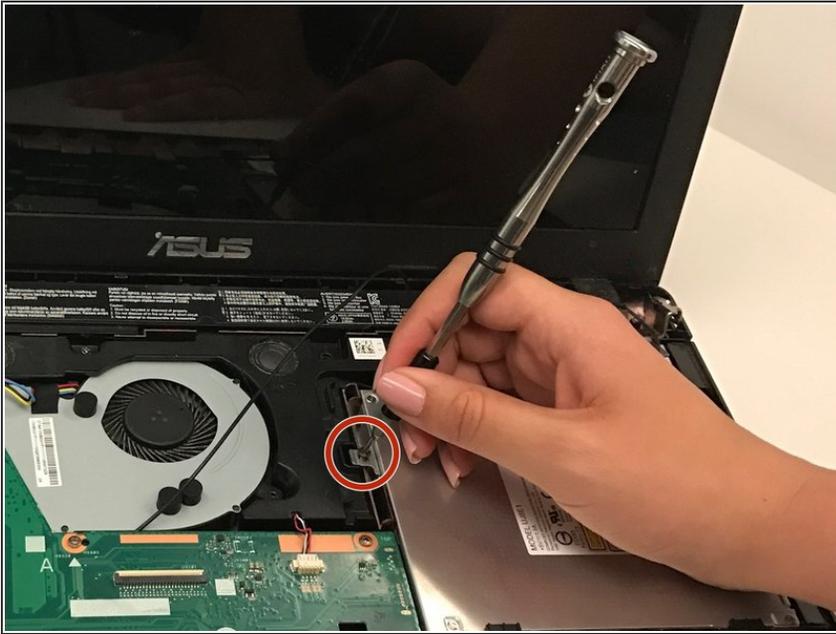

- Remove the four, 4 mm screws using a Phillips #00 screwdriver.

Step 6

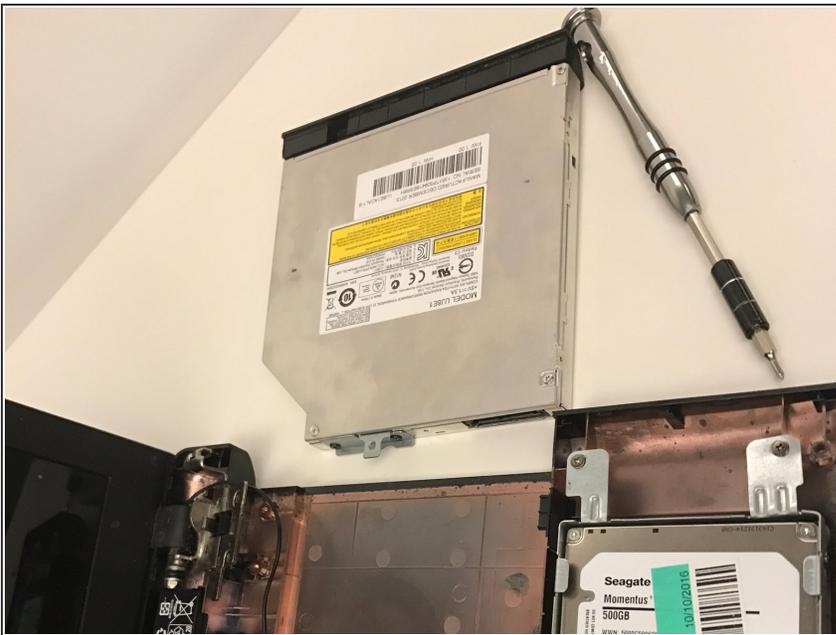

- Slide out the CD-ROM.

To reassemble your device, follow these instructions in reverse order.