




Lenovo Yoga 710-15IKB Fan Replacement

This guide will show you how to remove the fans on your Lenovo Yoga 710-15IKB.

Written By: Stephanie Alexander

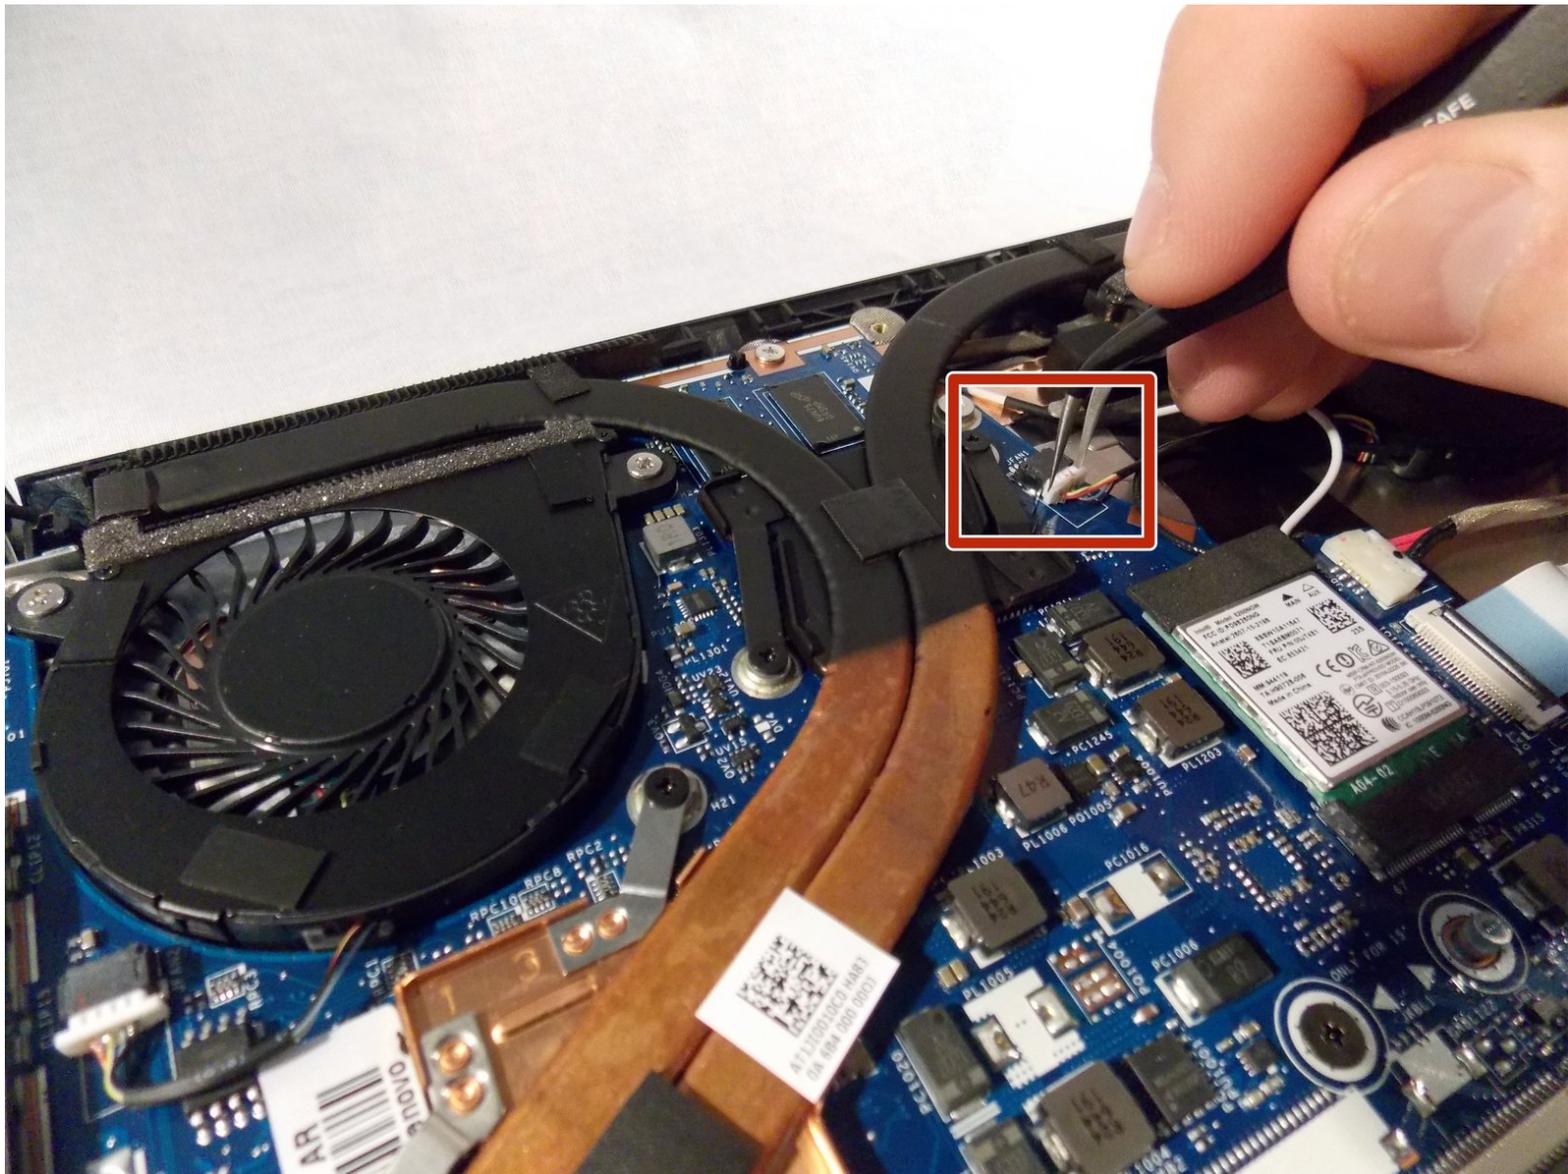

INTRODUCTION

This guide is useful for broken, inefficient, or defective fans within a Lenovo Yoga 710-15IKB. For loud or overheating fans, use this guide after confirming that dust is not the cause for fan issues.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [iFixit Opening Tool](#) (1)
- [Tweezers](#) (1)
- [Phillips #1 Screwdriver](#) (1)

PARTS:

- [Lenovo IdeaPad Yoga 710-15 Left Fan](#) (1)

Step 1 — Battery



i Ensure your computer is completely OFF before starting this guide.

- Remove the ten 3.3 mm T5 screws from the base cover.

! The screws aren't all the same length. Be sure to keep the screws sorted as you work.

Step 2




- Slide an opening tool between the base and back cover and work your way around the entire device to release the back cover.

Step 3




- Lift and remove the back cover.

Step 4

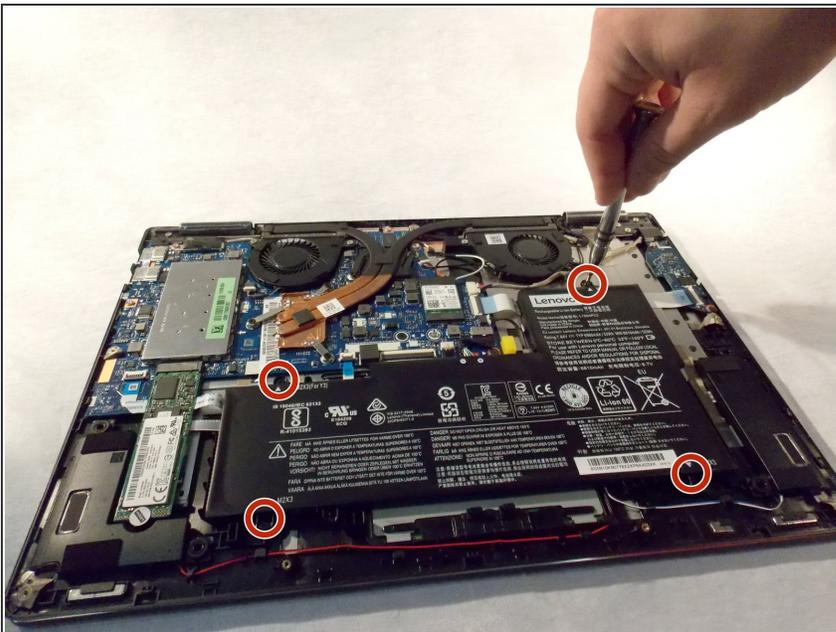


- Remove the four 3.5 mm screws around the battery using a Phillips #1 screwdriver.

Step 5

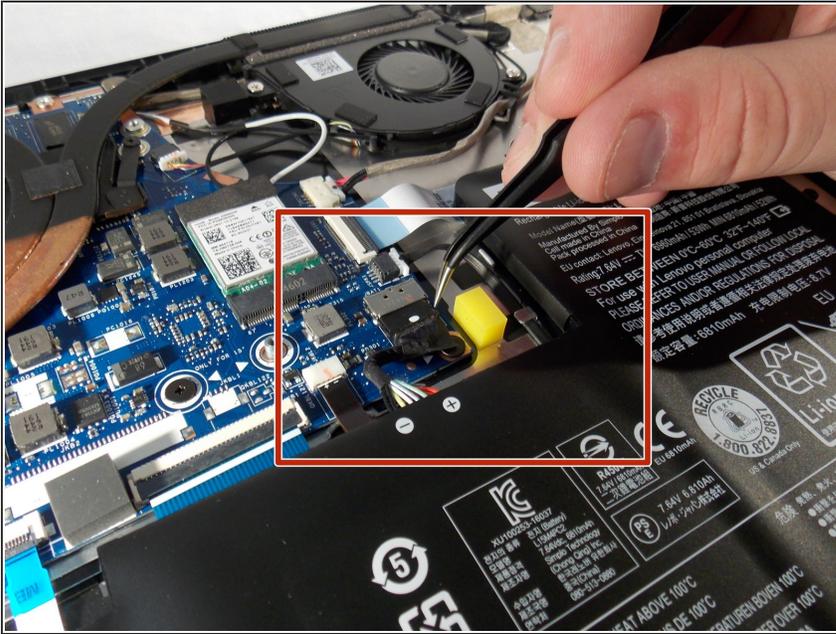


- Disconnect the battery by pulling its cable away from the hinge with a pair of tweezers or your fingers.

Step 6

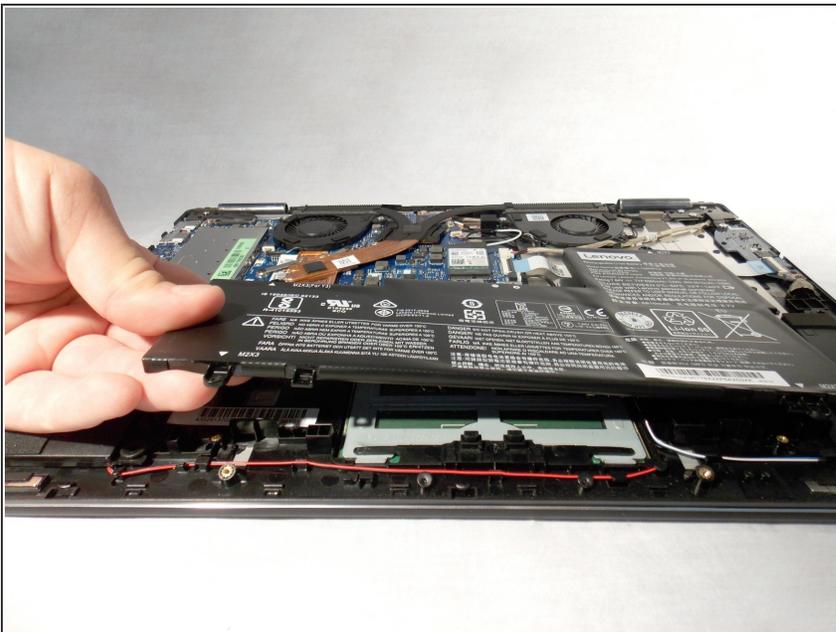


- Gently lift and remove the battery.

Step 7 — Fan

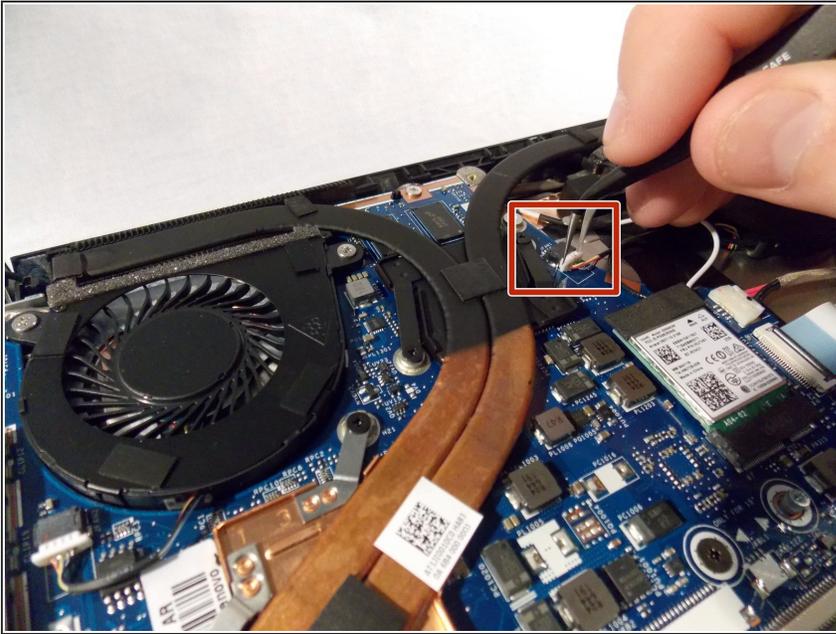

- Use tweezers to grab the fan harness.
- Gently pull the harness to disconnect from motherboard.

Step 8

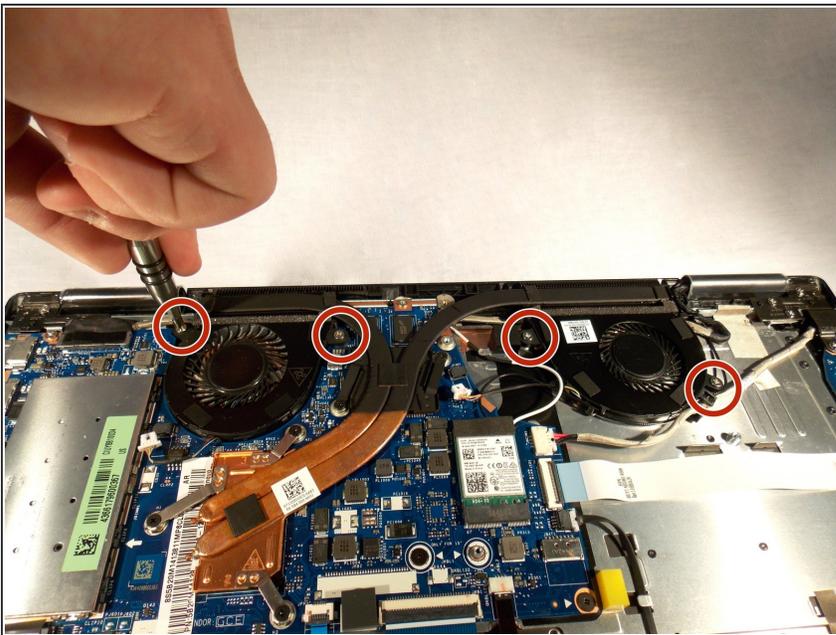

- Use a Phillips #1 screwdriver to remove the four screws holding down the fans.

To reassemble your device, follow these instructions in reverse order.