



# Motorola MBP33SBU Baby Unit Microphone Replacement

This guide shows how to replace the microphone in the baby unit of your baby monitor.

Written By: Ely Tilley



---

## INTRODUCTION

The Baby Unit Microphone is vital because it allows you to communicate between the two monitors in different rooms. You will need a soldering kit to successfully install a new microphone.

---

### TOOLS:


- [Tweezers](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
  - [Soldering Iron](#) (1)
-

## Step 1 — Baby Unit Microphone



- Using precision tweezers, remove the four rubber feet from the bottom of the baby unit.
- Using a Phillips #1 screwdriver, remove the 9.5mm screws that were under the rubber feet.
- Open the base of the baby unit.

## Step 2

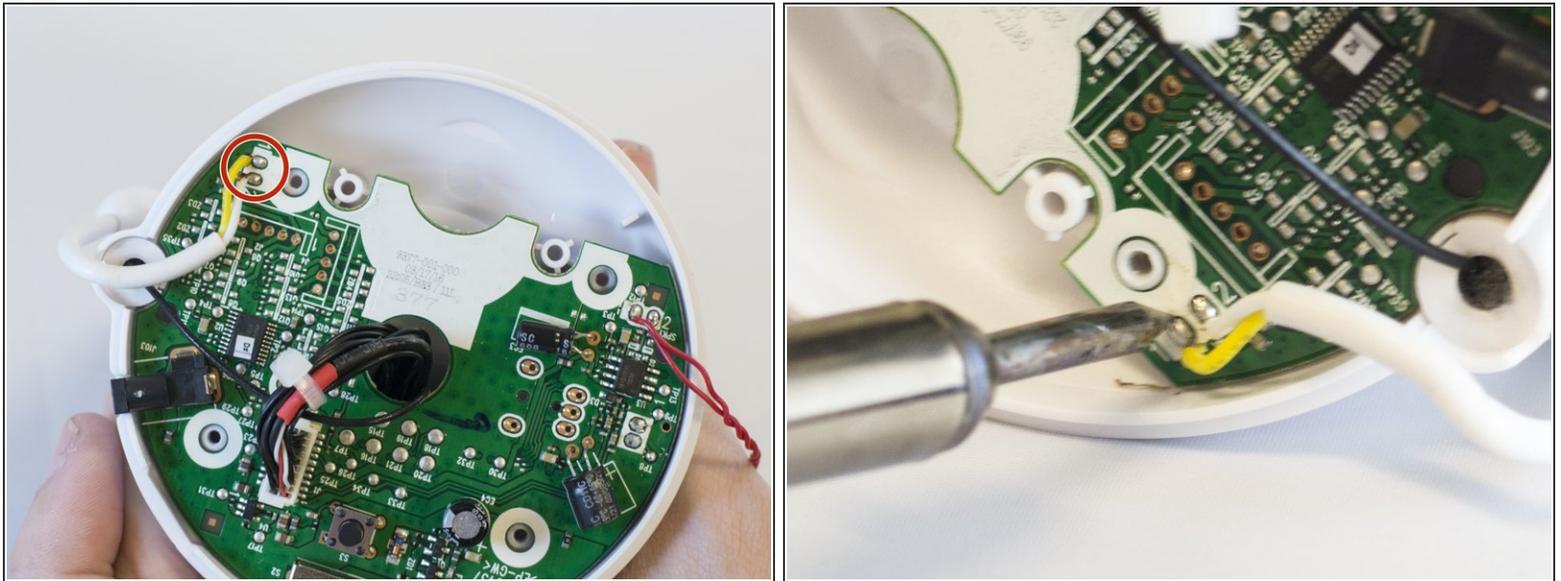

- Desolder the wires connecting the microphone to the circuit board.
- ⚠ Beware of overheating, the soldering kit is capable of damaging the circuit board.
- ⚠ Beware of the potential for personal injury from heated metals.
- ℹ For soldering procedures please refer to iFixit's guide to [Soldering Skills](#).

To reassemble your device, follow these instructions in reverse order.