




Poin2 Chromebook 11 Speaker Replacement

This guide shows how to replace the speakers in a Poin2 Chromebook 11.

Written By: Whitney Lunny

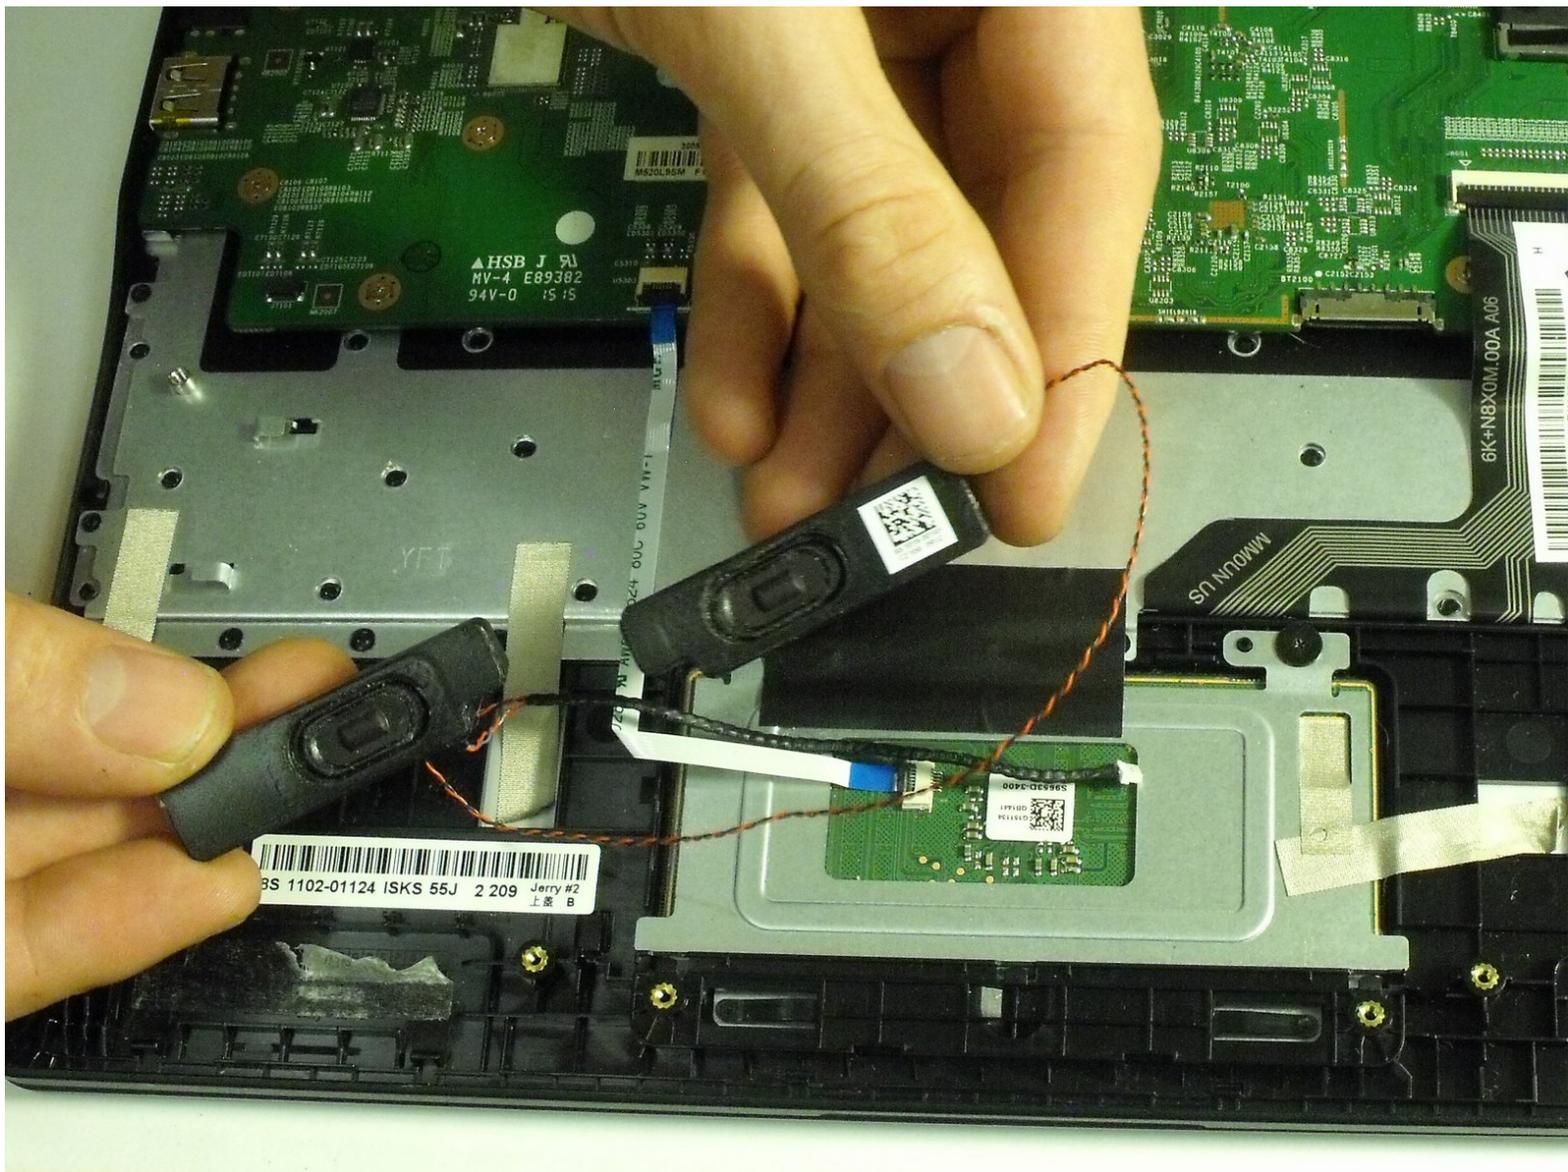


INTRODUCTION

This guide shows how to replace the speakers of the Poin2 Chromebook 11.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery

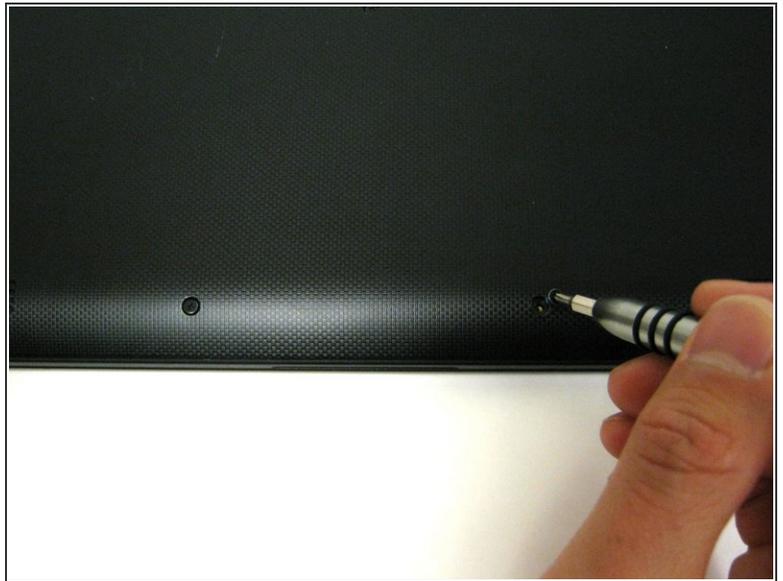


- Power down the Poin2 Chromebook 11 and disconnect the power adapter.
- Close the Chromebook and position it with the base facing up.
- Use a #0 Phillips screwdriver to unscrew the ten 7mm screws that hold the base to the rest of the frame
- ⓘ Poin2 Chromebook 11 does not have screws under its rubber feet at the base.

Step 2



- Insert a 1 cm-wide plastic opening tool between the base and top frame.
- ⓘ Applying pressure up and down with the tool may be necessary. When you hear a "click," this indicates the separation of the frame.
- Pry (up and down) around the entire border of the Chromebook to separate.
- Use your hands to gently lift the base away from the frame.

Step 3

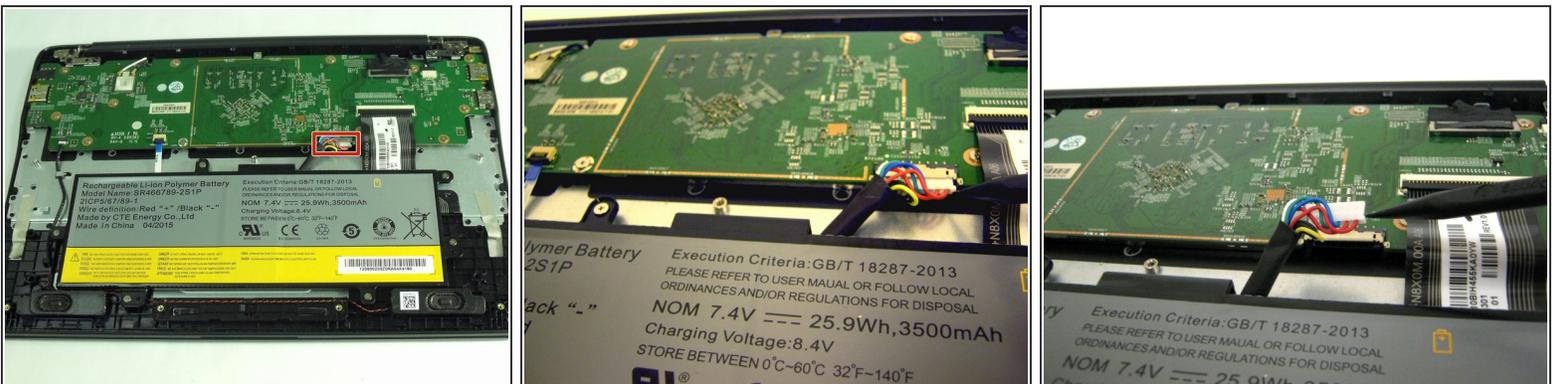

- Disconnect the white 8-wire battery connector from the motherboard using a spudger to push the two L-shaped clips out of the port.
- ⓘ The connector is a tight fit and requires careful pressure for release.

Step 4





- Remove the six 4mm screws using a Phillips #0 screwdriver.

Step 5





- Lift the battery from the frame.

Step 6 — Speakers

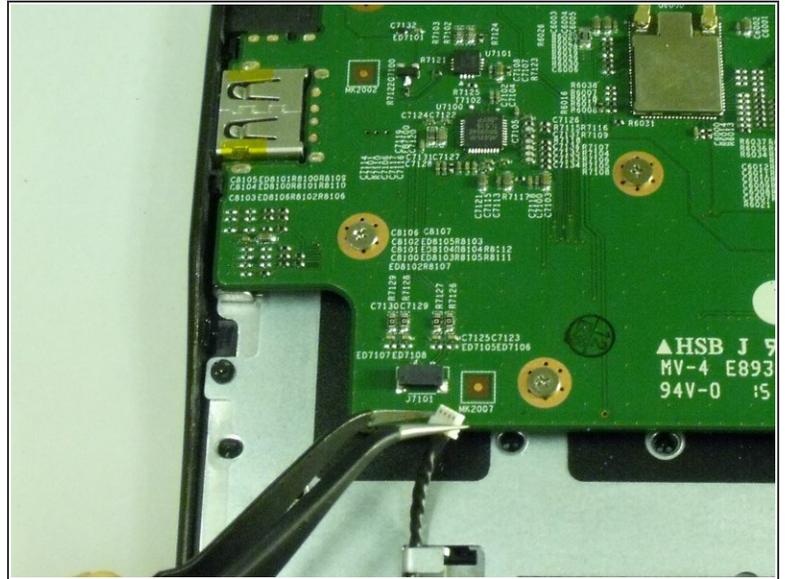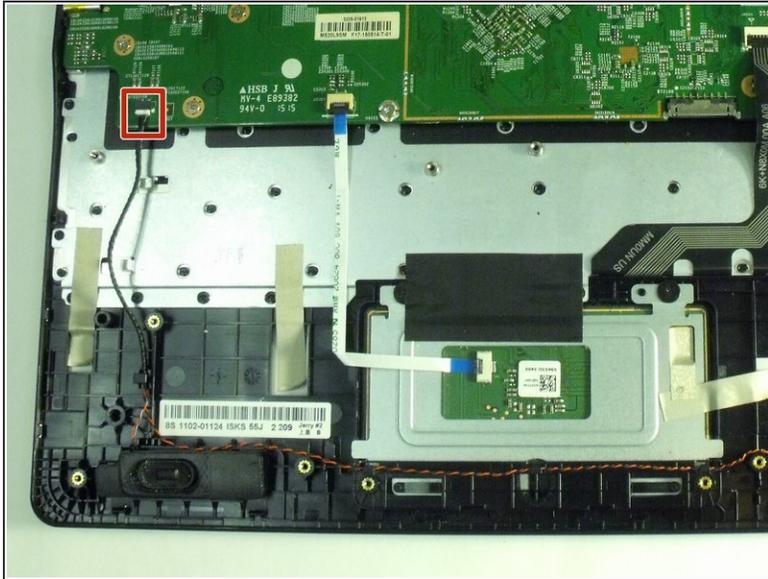


- Unplug the black speaker cable from the lower, left side of the motherboard.

Step 7

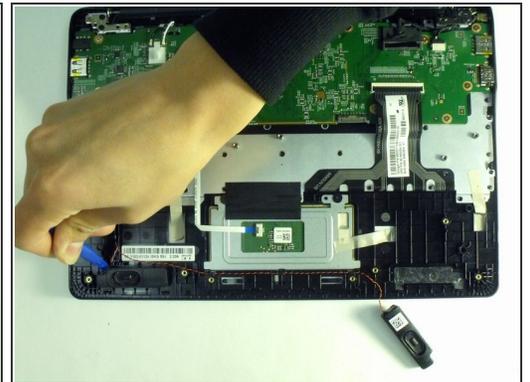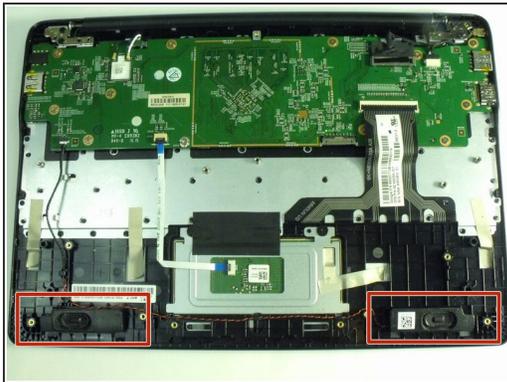

- Use the opening tool to pry the two speakers away from the frame.
- ⓘ An adhesive strip attaches each speaker to the frame. The speakers should pull away with moderate force.

Step 8

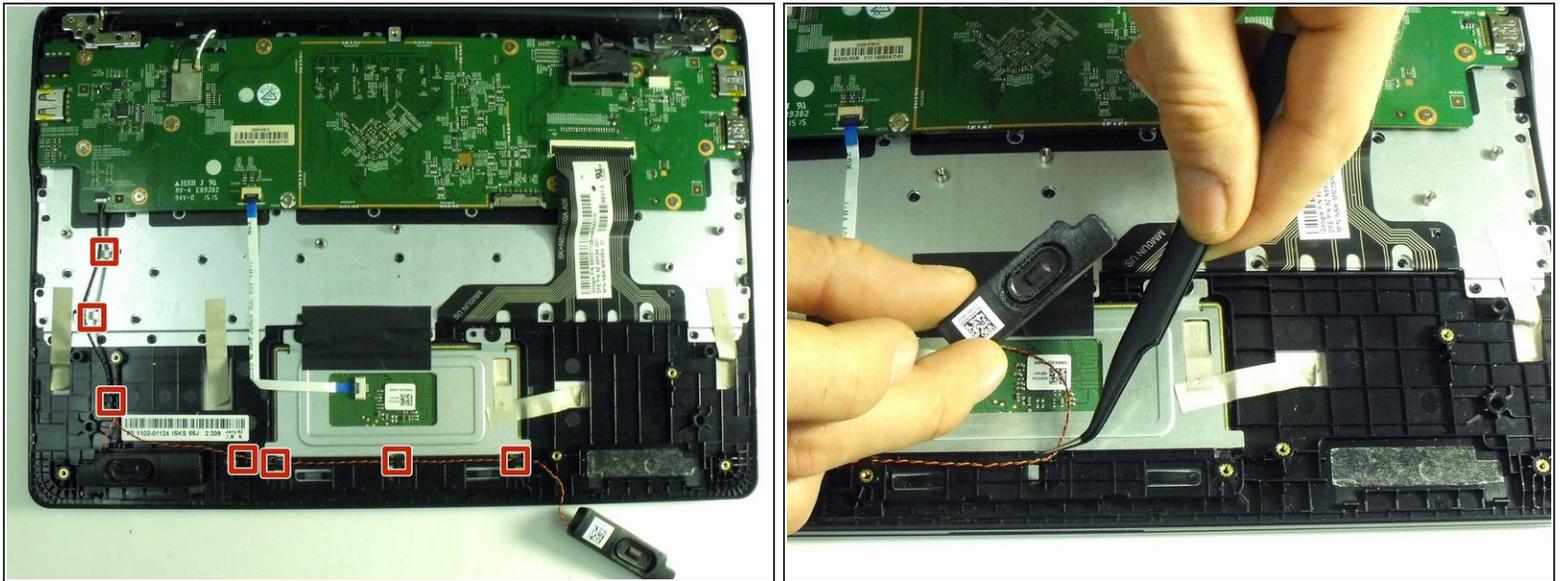

- Detach the speaker cord from the hooks holding it to the frame and lift the speakers away.

To reassemble your device, follow these instructions in reverse order.