



Microsoft Surface Laptop 3 15" Feet Replacement

Follow this guide to remove or replace the feet...

Written By: Carsten Frauenheim



INTRODUCTION

Follow this guide to remove or replace the feet on the bottom of a Microsoft Surface Laptop 3 (15").

Microsoft offers replacement feet for the Surface Laptop 3. Please see [this support article](#) for more details on how to order them.

TOOLS:

[Spudger](#) (1)

PARTS:

[Surface Laptop 3/4/5 Feet - Genuine](#) (1)

Step 1 — Flip the laptop over



- Flip the laptop over and place it on your work surface, feet facing up.

Step 2 — Removal tip



- ① The feet on the bottom of the laptop are meant to be removed with the pointed end of a spudger.
 - Each foot has a hidden indent that will simplify removal.
 - To make sure the spudger is in the indent, insert it at the nearest **long edge**, pushing parallel to the short edges of the laptop, as shown.
- ① Note that the two feet near the rear (screen) edge are different than the two front feet.

Step 3 — Remove the rear feet




- Insert the pointed end of a spudger underneath one of the two rear feet, at its rear edge.
- Push the spudger underneath the foot and pry up to release it.
 - ❗ The two rear feet are secured with some light adhesive.
- Repeat to remove the second rear foot.

Step 4 — Remove the front feet



- Insert the pointed end of a spudger underneath one of the two front feet, at its front edge.
- Push the spudger underneath the foot and pry up to release it.
 - ❗ The two front feet are secured with plastic clips as well as light adhesive.
- Repeat to remove the second front foot.

Step 5 — Reassembly tip

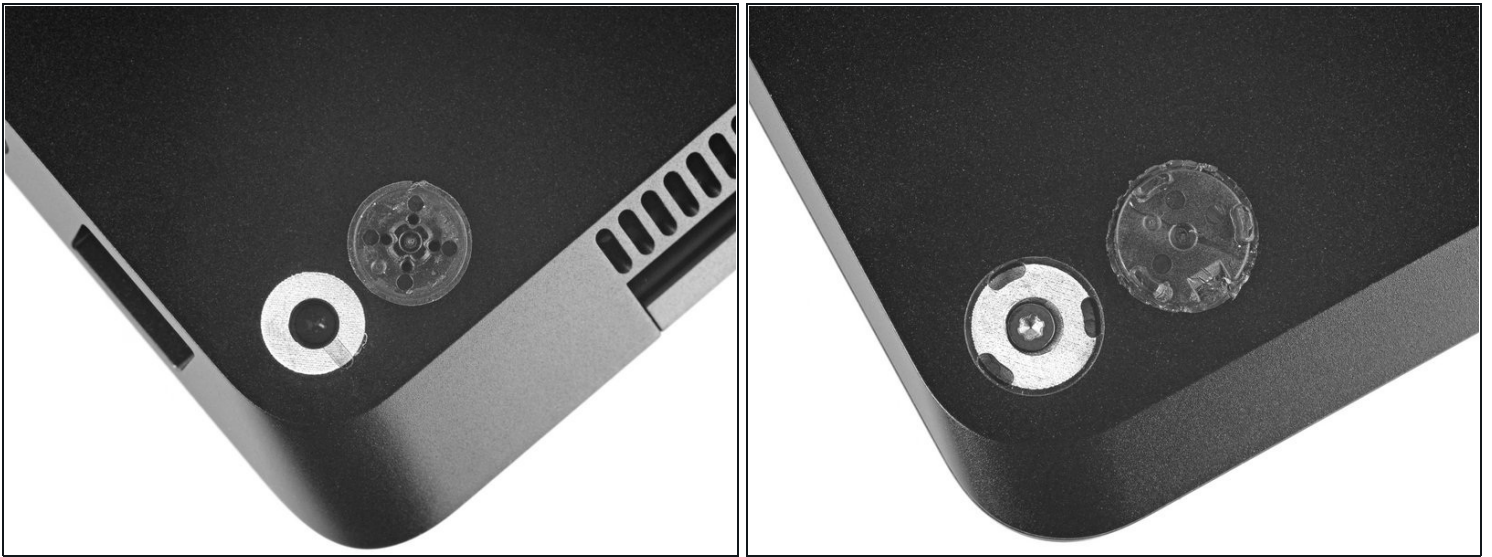

★ During reassembly:

- Note that the front and rear feet are different.
- Note that the front feet are directional and only clip in one way.

Step 6 — Reassembly tip



★ In place of reusing old, worn out feet on your device, 8 mm rubber furniture pads can be a good substitute.

- Peel a pad away from its backing, align it over a foot cavity, and press to secure.

Repair didn't go as planned? Try some basic [troubleshooting](#) or search our [Answers community](#) for help.