



Asus X200MA Trackpad Replacement

Replace the trackpad on your Asus X200MA.

Written By: Vanessa Garcia



INTRODUCTION

Use this guide to replace the trackpad on your Asus X200MA.



TOOLS:

- [Tweezers](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Back Panel





- Remove the following six screws:
 - Six 4 mm screws using a Phillips #0 screwdriver.
 - Remove the following one screw:
 - One 14 mm screw using a Phillips #0 screwdriver.
- ★ The 14mm screw goes in the center.

Step 2




- Use a plastic or metal spudger to separate the keyboard from the back panel and lift the keyboard out of place.

Step 3 — Trackpad

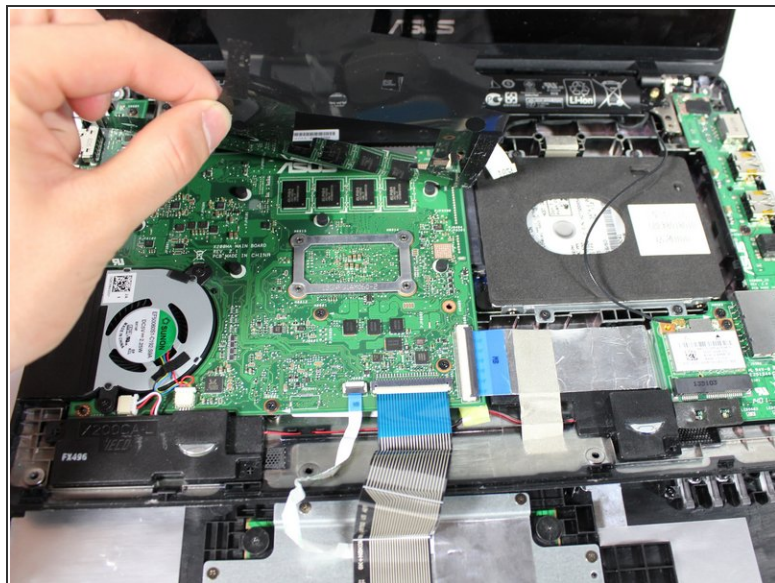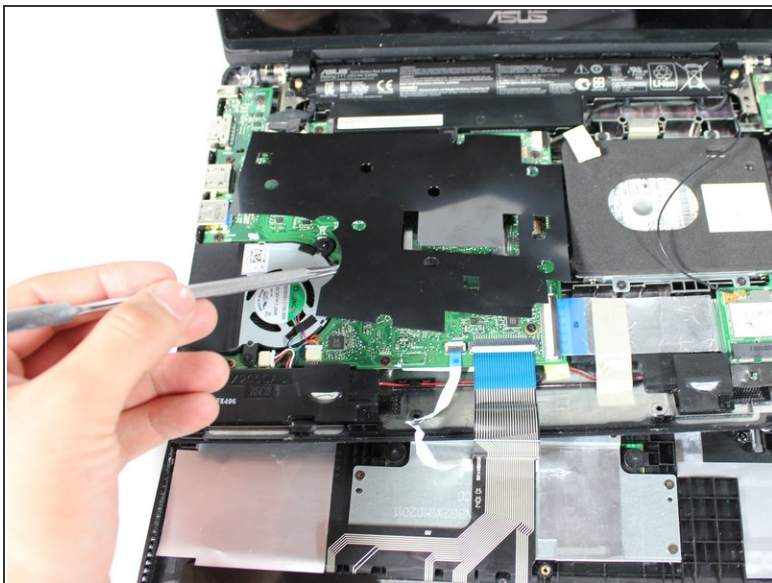


- Use the spudger to lift up and remove the black plastic covering.

Step 4

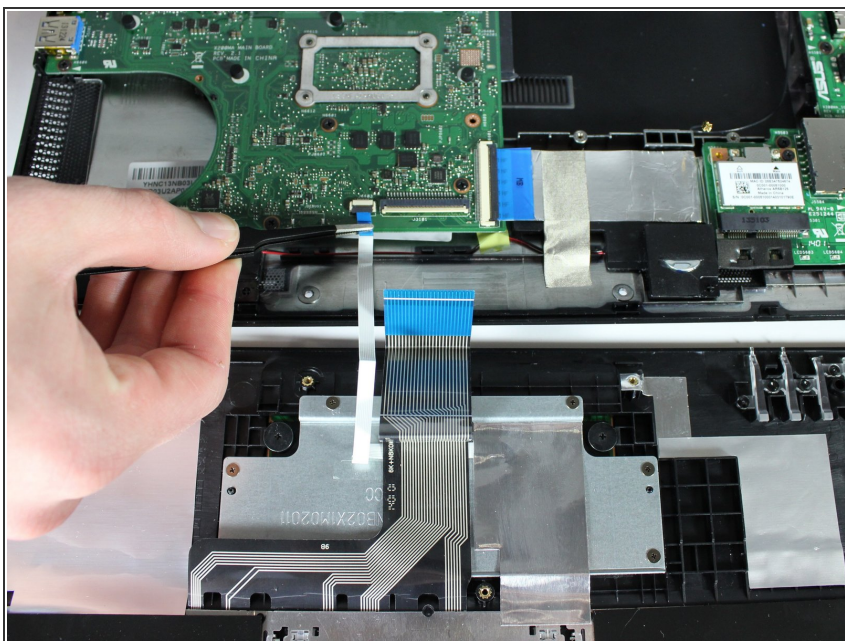


- Remove thinner white strip by first flipping up black piece at the top of the strip with the tweezers and then pulling it out.

Step 5 — Mouse

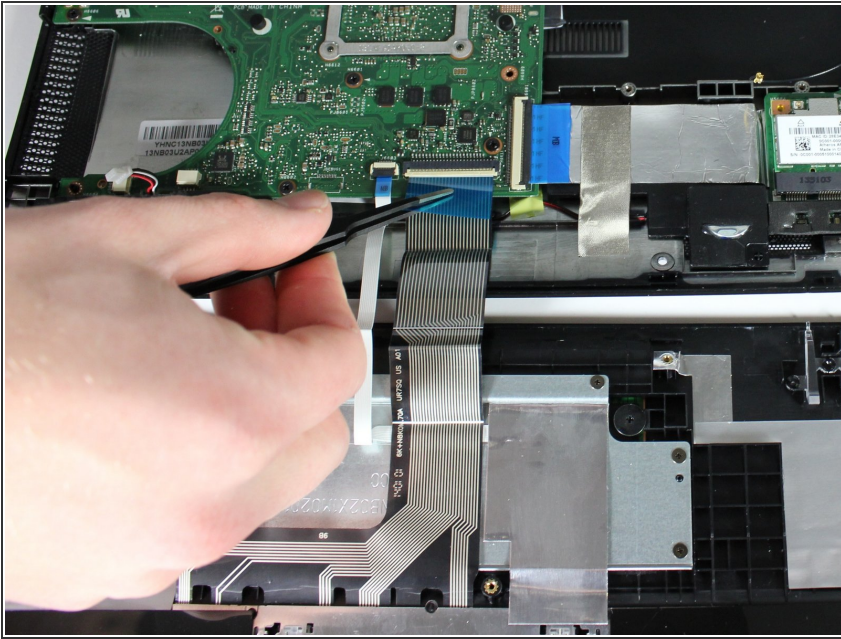


- Remove wider blue strip with tweezers.

Step 6

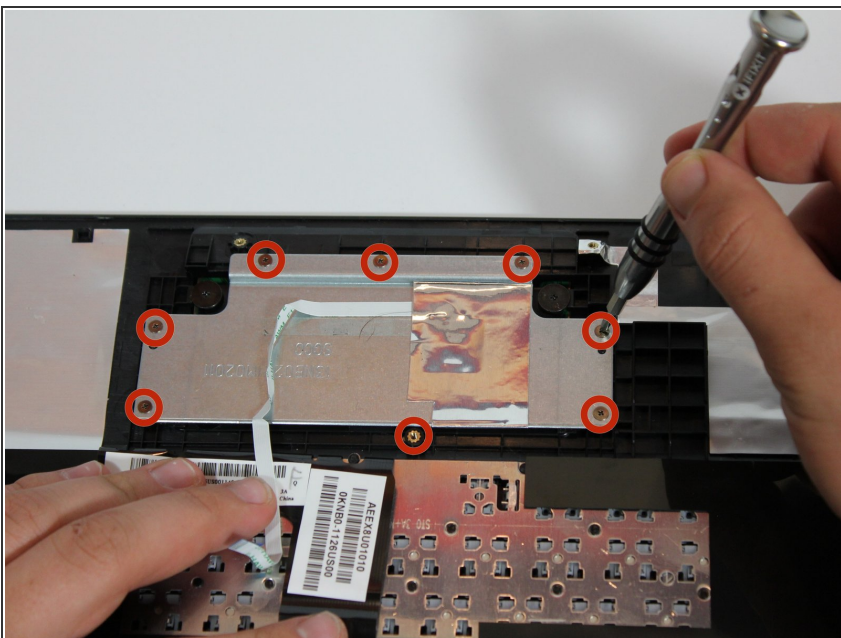


- Remove the following eight screws:
 - Eight 3 mm screws using Phillips #0 screwdriver.

Step 7

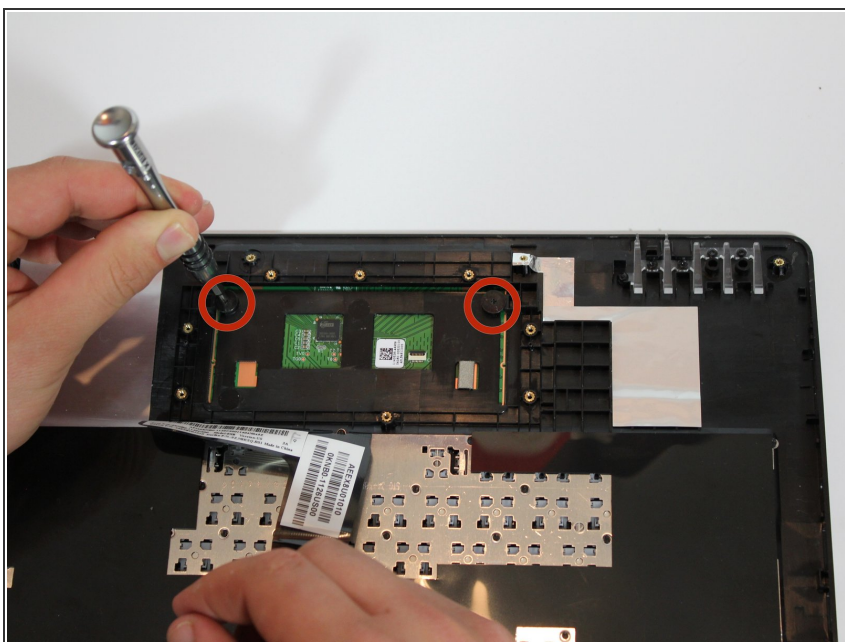

- Remove the following two screws after lifting metal plate off:
 - Two 2 mm screws using a Phillips #0 screwdriver.

Step 8

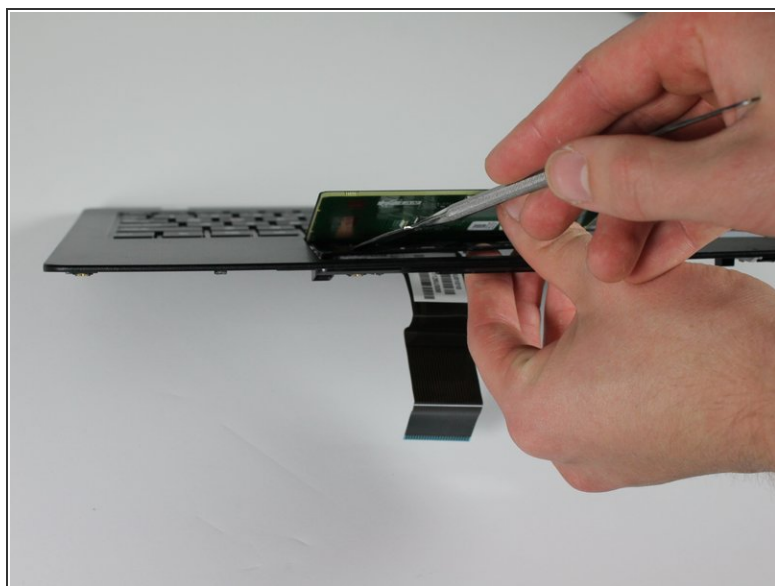

- Use metal spudger to get in between mouse pad and keyboard and lift off.

To reassemble your device, follow these instructions in reverse order.