




Motorola Moto 360 O-Ring Replacement

This guide will show you how to replace the O-Ring--the green waterproofing band of rubber inside of the Moto 360.

Written By: Jake Steinorth

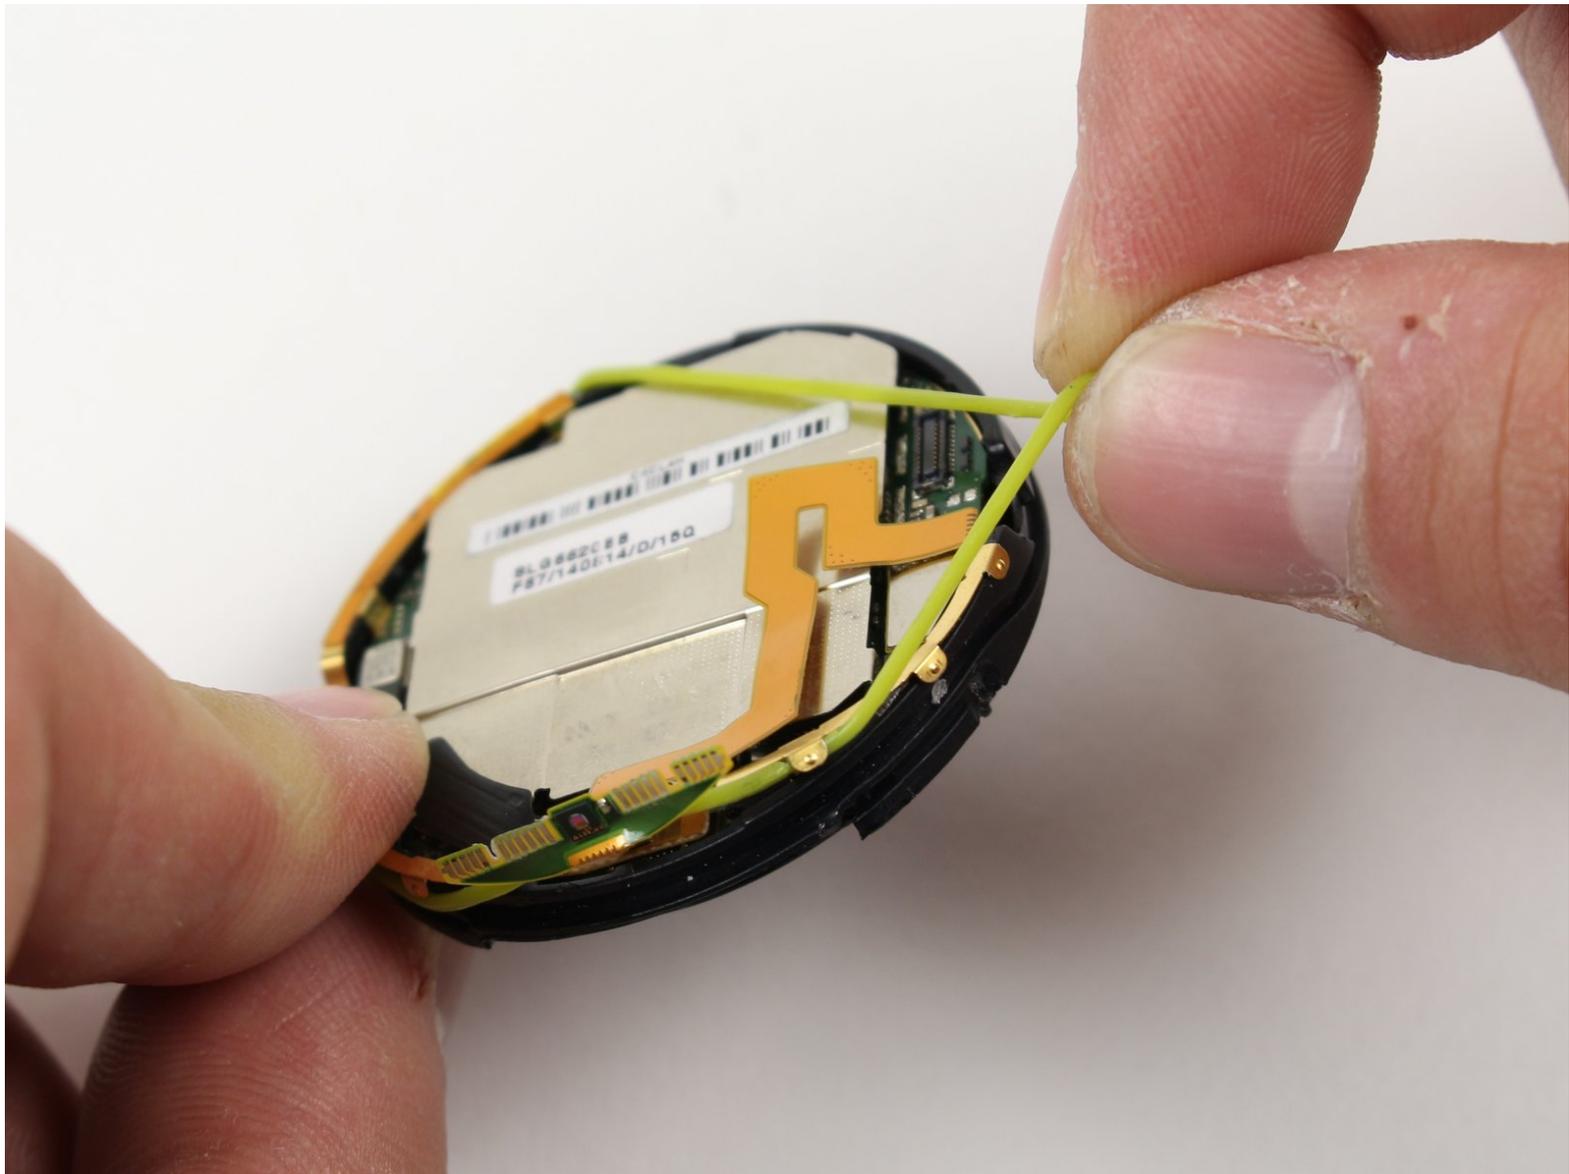

INTRODUCTION

The O-Ring is fragile. Take care not to let it break when dealing with it.

TOOLS:


- [Jimmy](#) (1)
 - [iOpener Kit](#) (1)
-

Step 1 — Rear Cover



- Set the watch face down on a flat surface.
- Place the heated [iOpener](#) on the face of the rear cover to loosen the adhesive underneath.

Step 2 — Remove the back cover without force

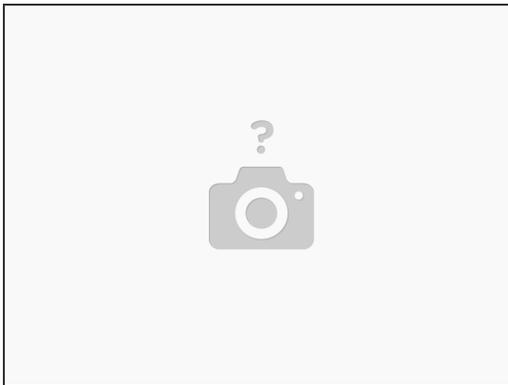

- Follow the instructions here to remove the back cover without force by using some needles in the right places:
- [Motorola Moto 360 Case Locking Fastener Replacement](#)
- Then continue with step 5. Or don't use needles and just continue with the next steps.

Step 3



- Gently slide the blue opening pick between the rear cover and the metal casing.
 - ⚠ The rear cover is extremely fragile. Be very delicate when using the opening pick.
- Work your way entirely around the rear cover.
 - ⓘ It may take several attempts of reheating the adhesive to get the rear cover loose enough to pull off.

Step 4




- Once the adhesive has been successfully loosened, gently pull the rear cover off.

Step 5 — O-Ring



- To get to the O-Ring, use the Jimmy to gently pry off the rear housing.

Step 6

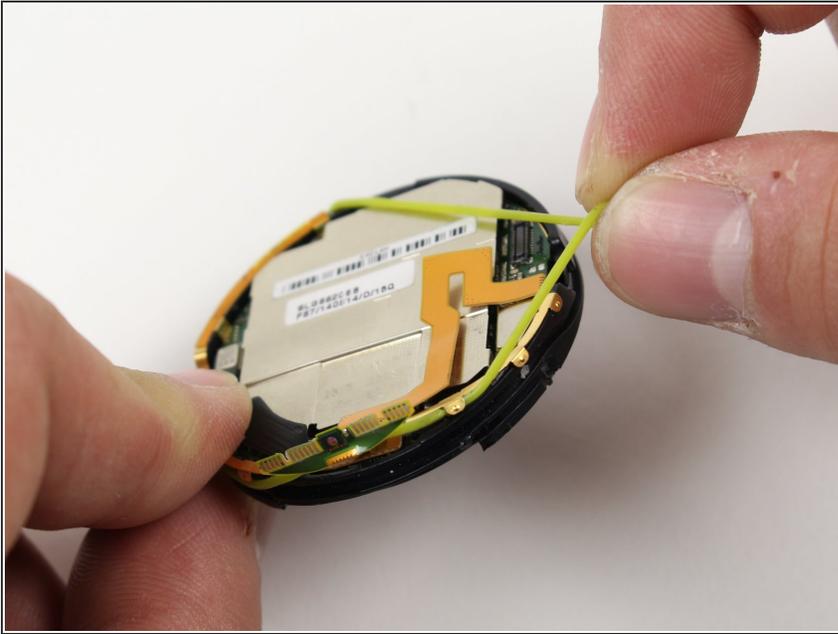

- Pinch the green rubber O-Ring and slide it off of the watch.
- ⚠ The O-Ring is delicate and is easily severed. Use care around sharp objects.

To reassemble your device, follow these instructions in reverse order.