




Asus Vivobook S500CA Fan Replacement

This Guide details how to replace the internal fan of the Asus Vivobook S500CA.

Written By: Brad Shipman

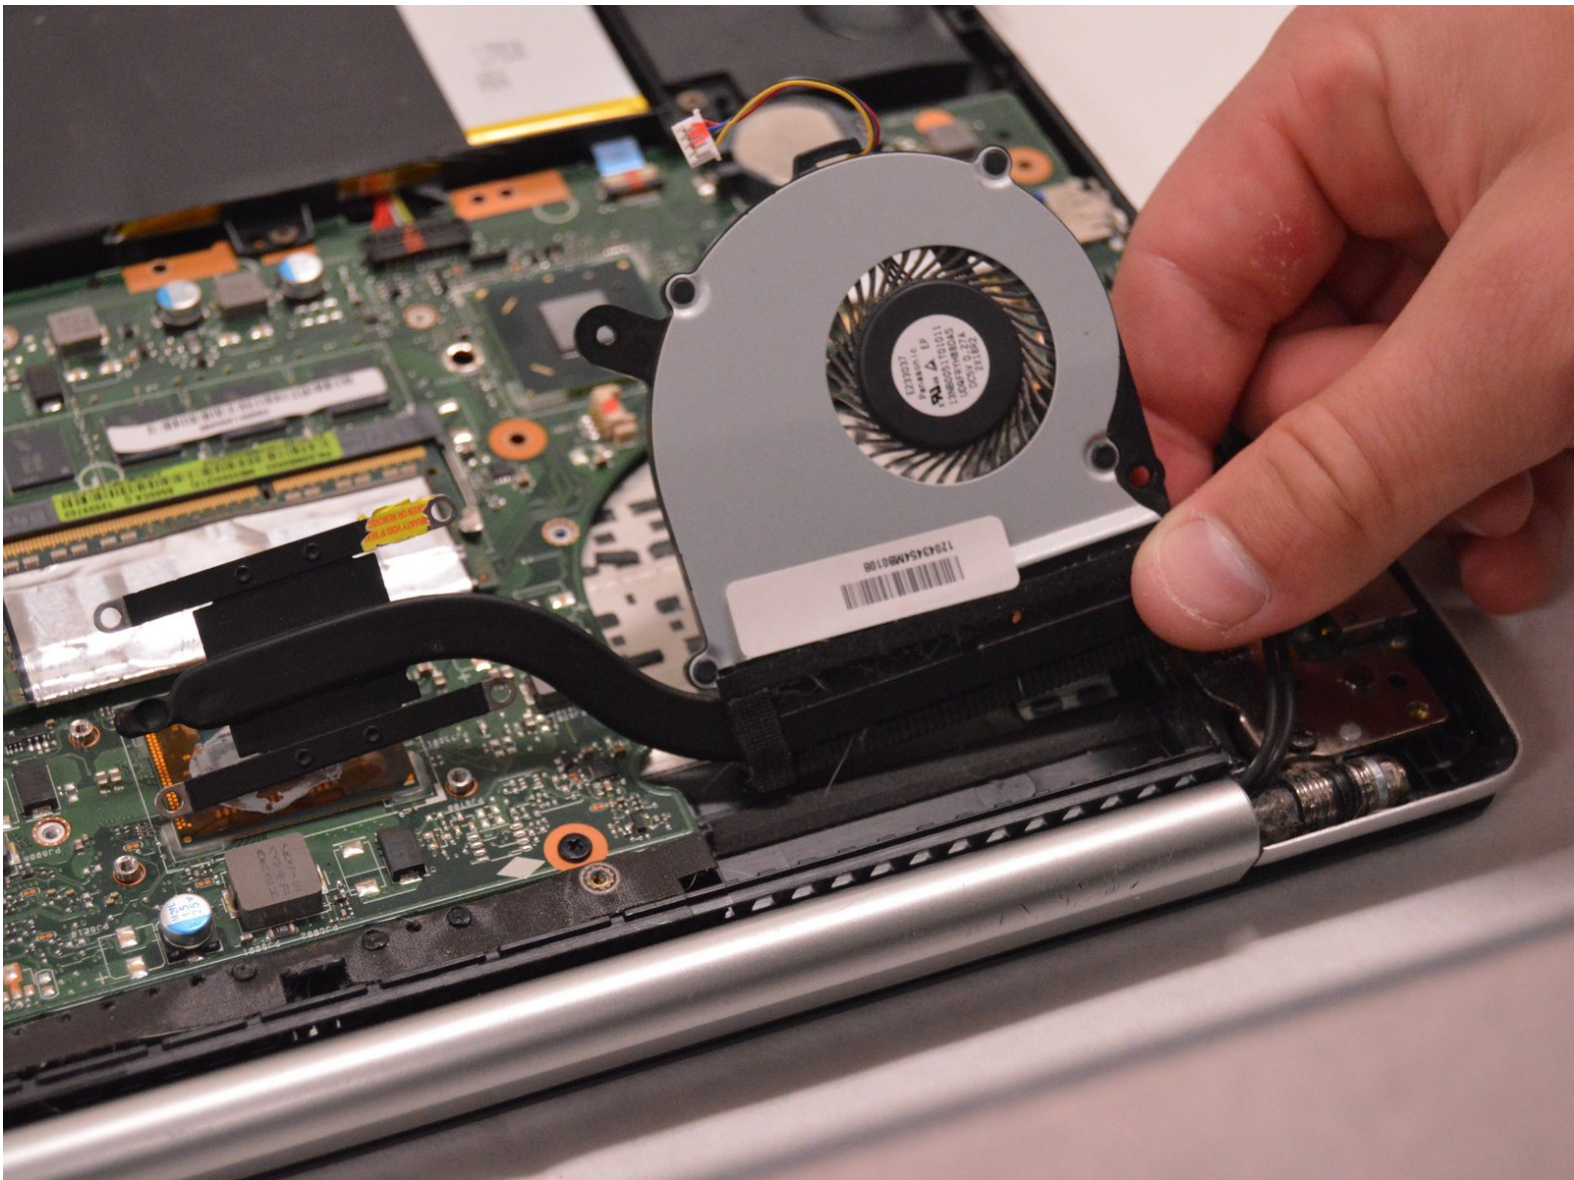

INTRODUCTION

If your fan is either broken or not running correctly, use this guide to replace it. This repair can be completed by one person using a PH1 Philips Head Screwdriver. Keep in mind that the Asus Vivobook S500CA uses a specific model fan, which must be acquired before beginning this replacement.

TOOLS:


- [Phillips Head Screwdriver: Size PH1](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Cooling Fan



- Turn the device over so the back plate is facing up.

Step 2

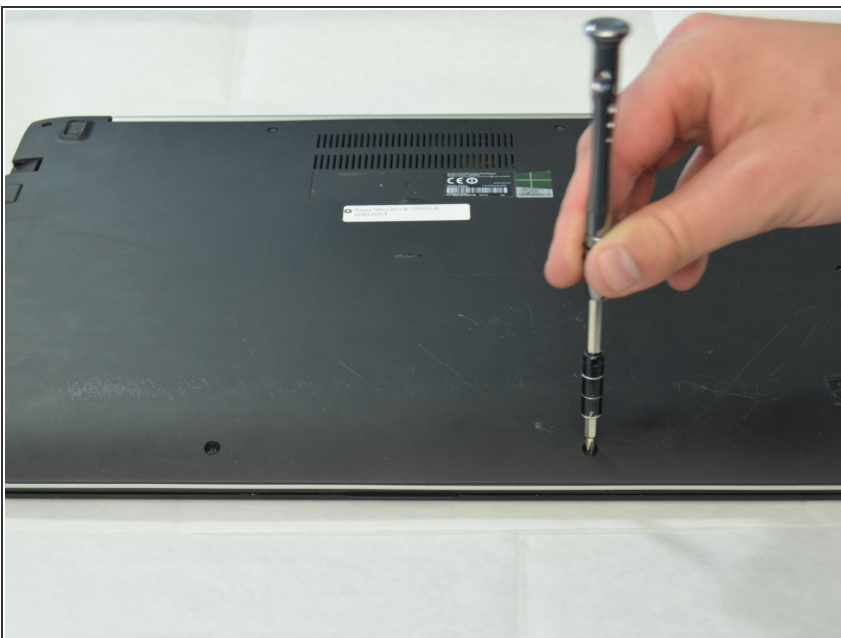



- Use a Phillips Head PH1 screwdriver to remove 10 screws around the perimeter of the back plate.
- ⓘ It may be helpful to lay out the screws in the orientation in which they are taken out, in order to help remember where they go.

Step 3




- Remove the back plate by lifting it straight up.

Step 4

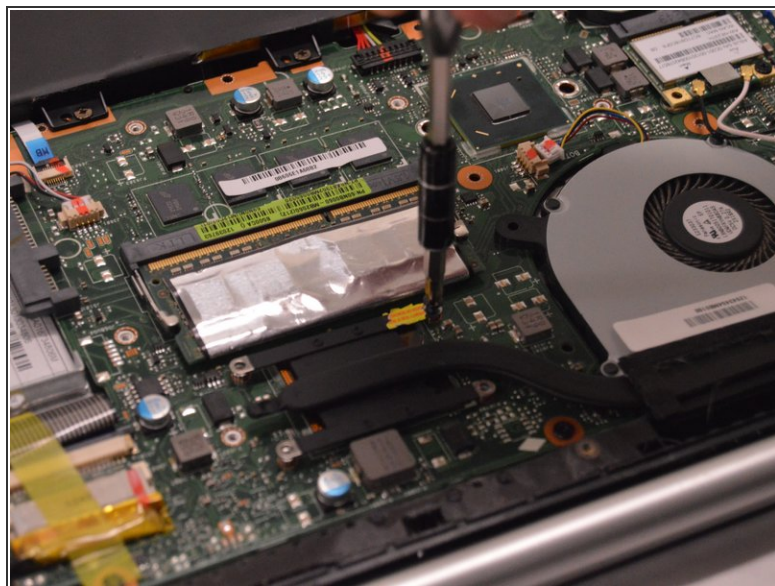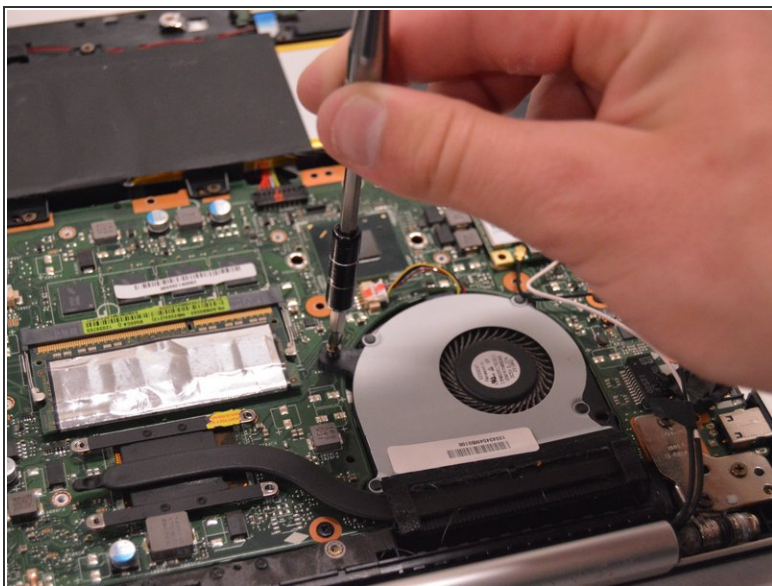

- Remove 2 (.5 cm) Phillips Head screws found around the fan and 4 (.3 cm) Phillips Head screws found around the heat sink connector.


Step 5

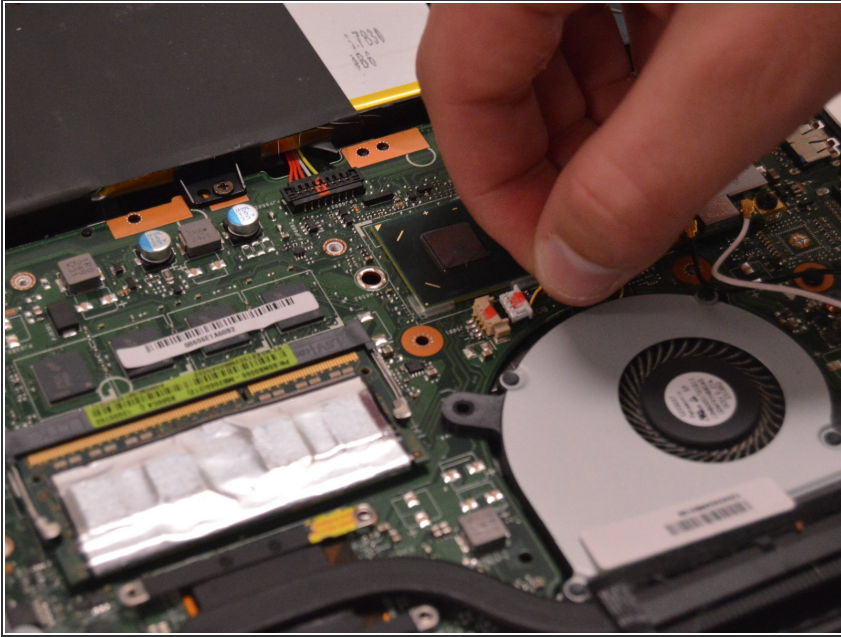

- Unhook the electronic connection located above the fan by pulling the white connector straight out of the brown socket.


⚠ This photo is for demonstration purposes only. Do not remove by pulling the wires. Instead, remove by pulling on the edges of the white socket.

Step 6

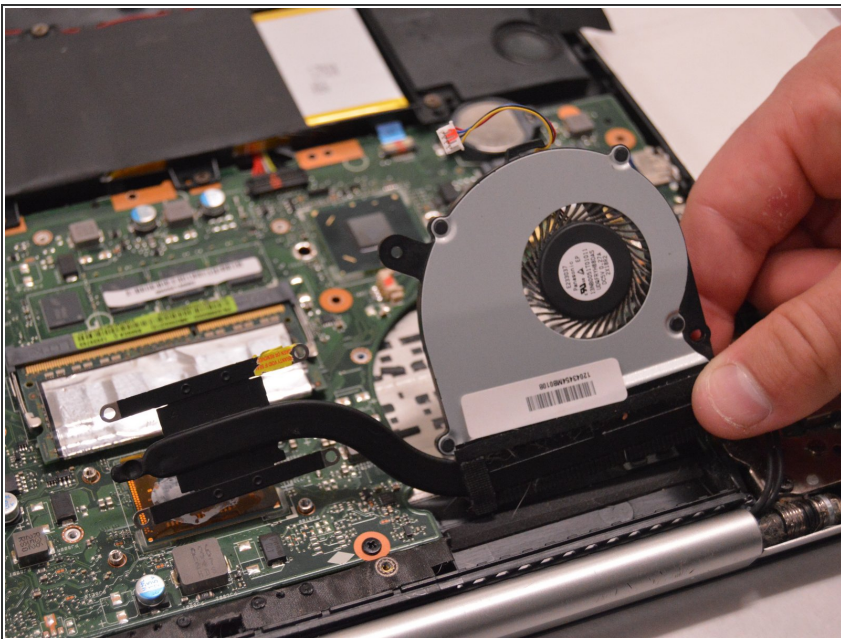

- Remove the fan and connected heat sink by lifting straight out of the assembly.

Step 7

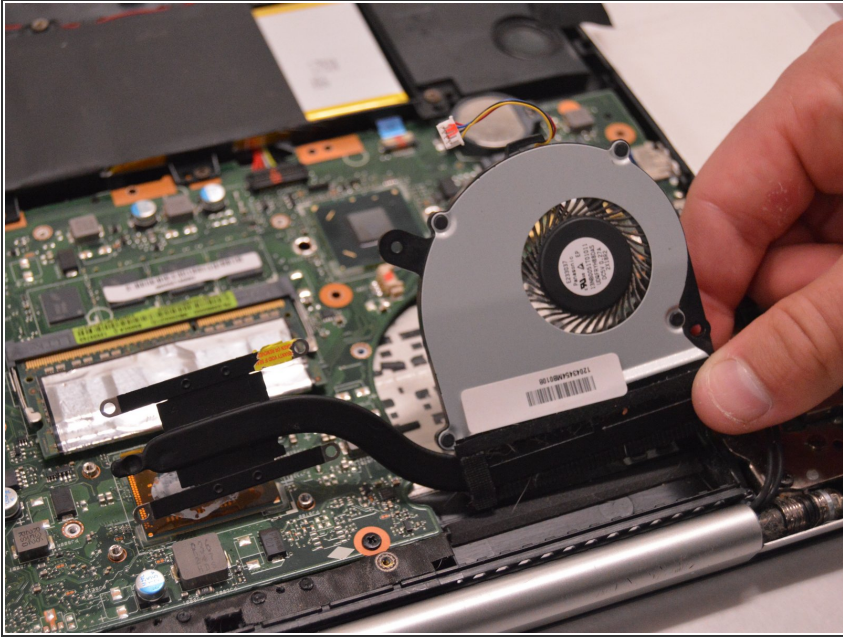

- Replace fan and follow steps 1-5 in *reverse order* to complete repair.

To reassemble your device, follow these instructions in reverse order.