




Hover-1 H1 Battery Replacement

How to remove the battery from the Hover-1 H1 hoverboard.

Written By: Aaron Teh

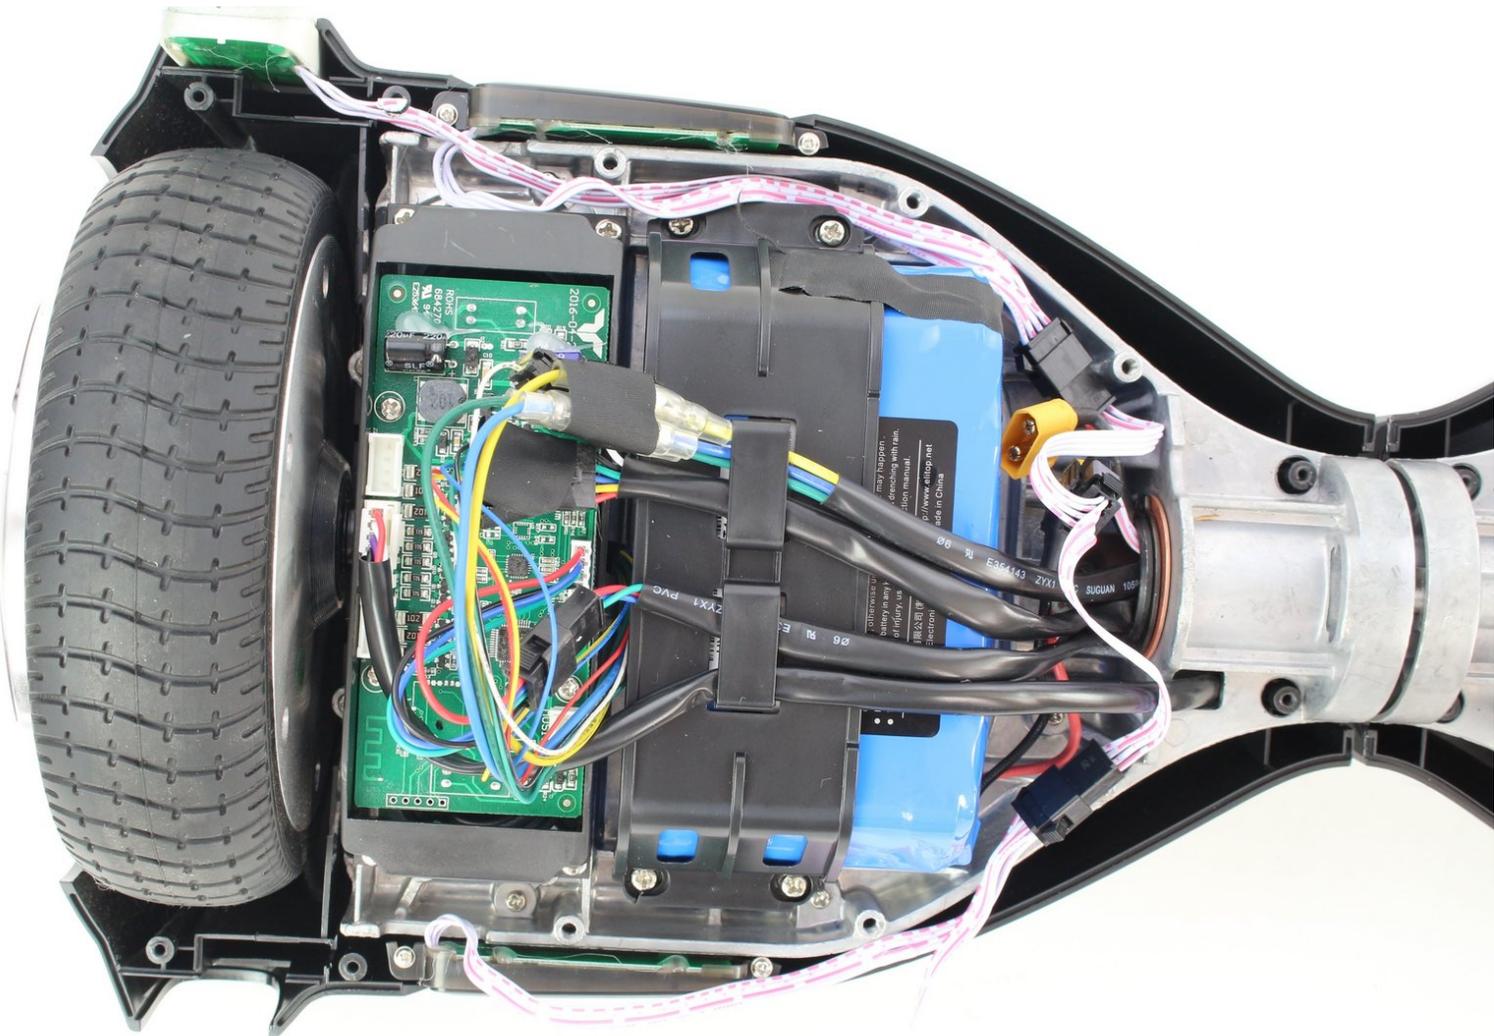


INTRODUCTION

Replacing in the battery in your Hover-1 H1 hoverboard might help to solve charging problems.

TOOLS:


- [Phillips #2 Screwdriver](#) (1)
-

Step 1 — Bottom Shell

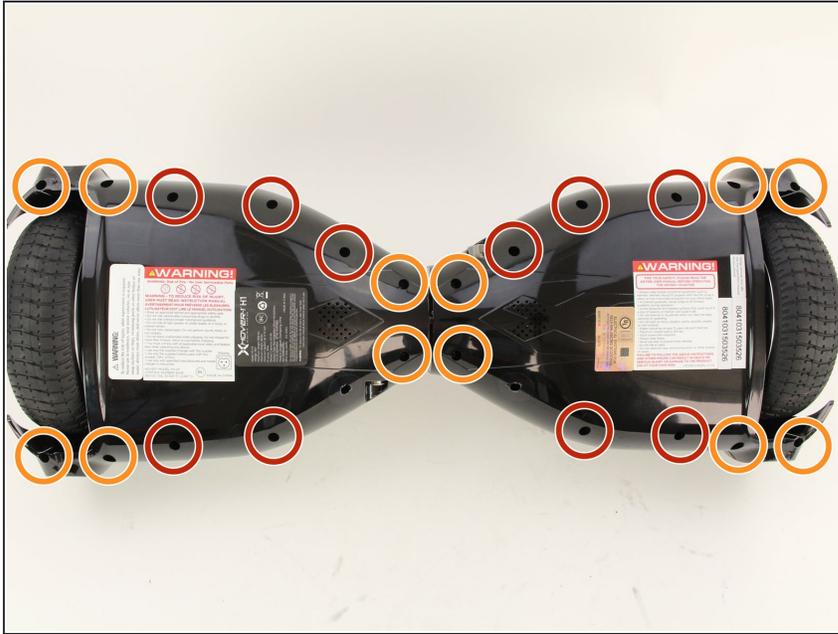



- Remove the ten 9mm machine screws by using a long Phillips #2 screwdriver to rotate the screws counterclockwise.
- Remove the twelve 9mm sheet metal screws by using a long Phillips #2 screwdriver to rotate the screws counterclockwise.

Step 2

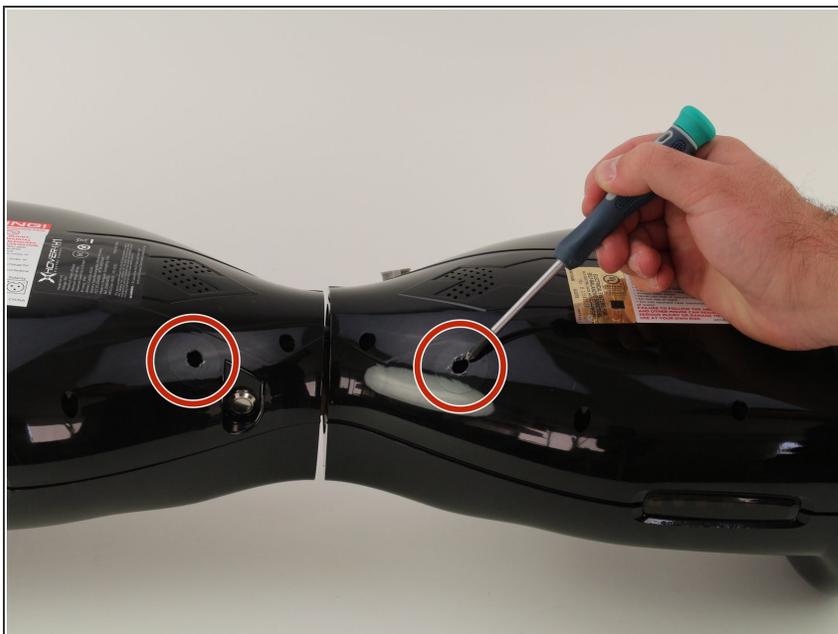

- Puncture the two black stickers by using the tip of a screwdriver.
- Remove the two 9mm machine screws by using a long Phillips #2 screwdriver to rotate the screws counterclockwise.


Step 3

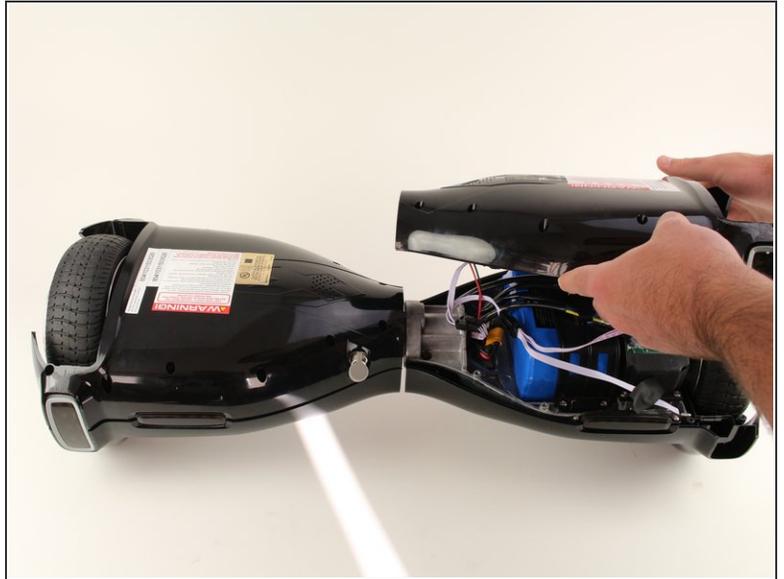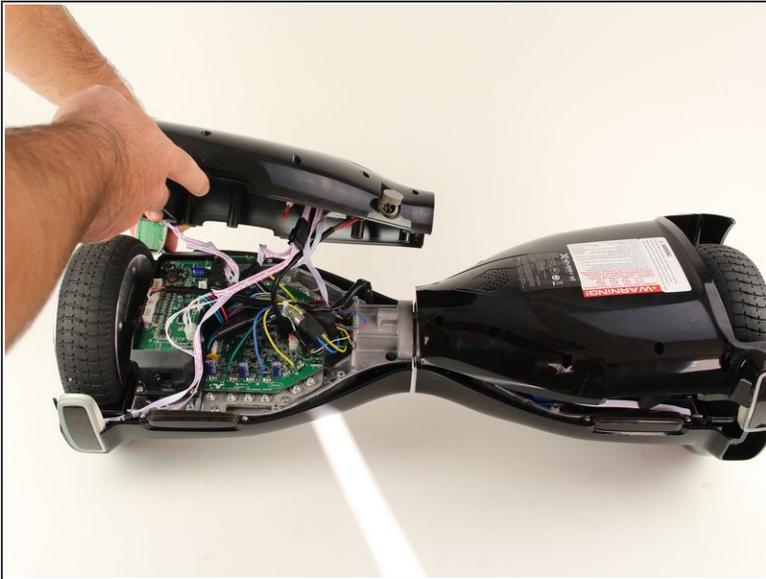

- Lift each side of the bottom shell by pulling up.


⚠ When lifting the shell, take care to not tear any cables from their connectors.

Step 4

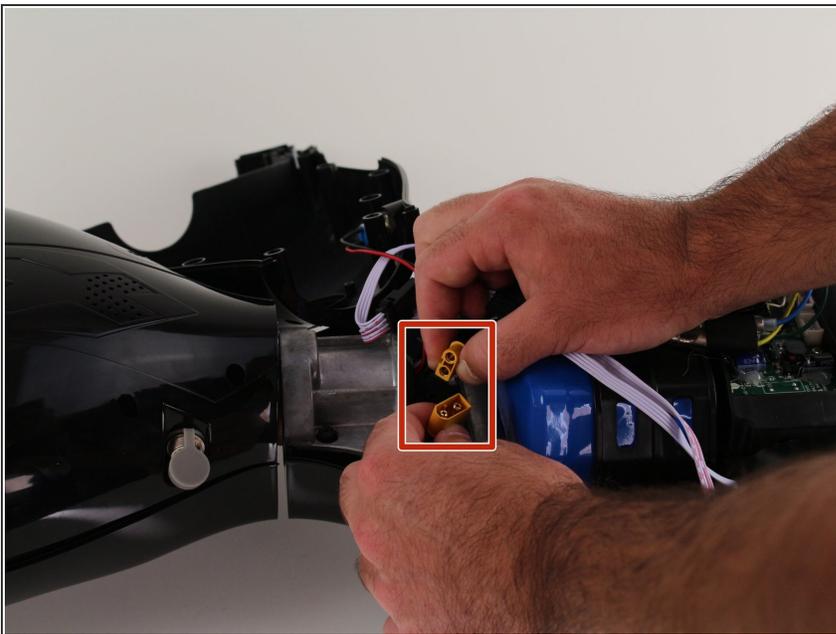

- Unplug the battery by pulling gently on both sides of the orange connector.

Step 5 — Battery

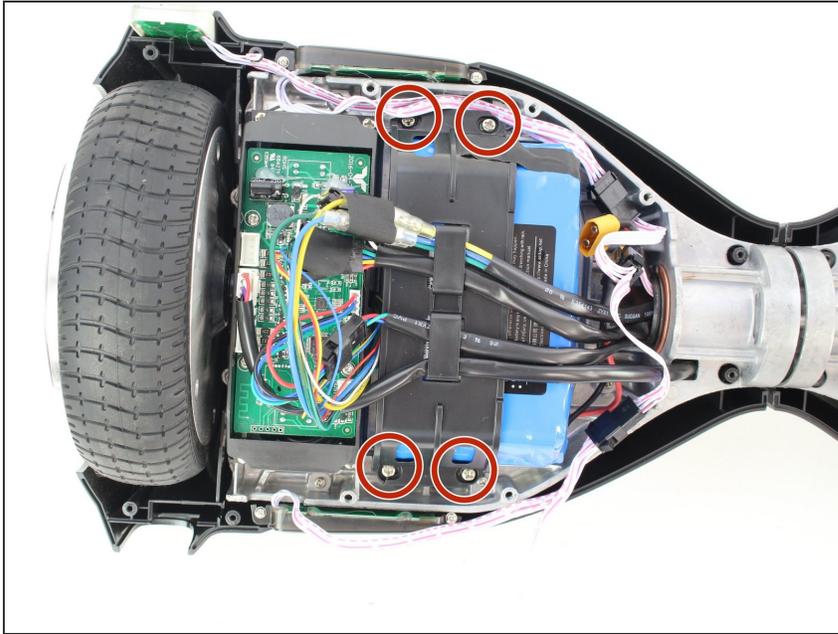

- Remove the four 7mm screws by using a Phillips #2 screwdriver to rotate the screws counterclockwise.

Step 6



- Gently lift the battery harness and remove the battery by lifting the battery and moving it away from the hoverboard.

To reassemble your device, follow these instructions in reverse order.