



BLU Dash 3.5 Ear Speaker Replacement

Replace malfunctioning ear speaker on the Blu Dash 3.5.

Written By: Aaron Boehm



INTRODUCTION

This guide will go through the process of replacing the ear speaker on the front of this device.



TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Essential Electronics Toolkit](#) (1)



PARTS:

- [Blu Dash 3.5 Battery](#) (1)

Step 1 — Battery



- Start by locating the slot on the lower right corner of the device.
- Insert the opening tool into the slot.
- Pry the back cover off. Once the corner is off, continue around the perimeter of the phone pulling the back off with your fingers.


i A fingernail can work to open the back in place of an opening tool.

Step 2




- Locate the indentation at the bottom of the battery.
- Insert your thumb and pull the battery out.

Step 3 — Volume and Lock Button

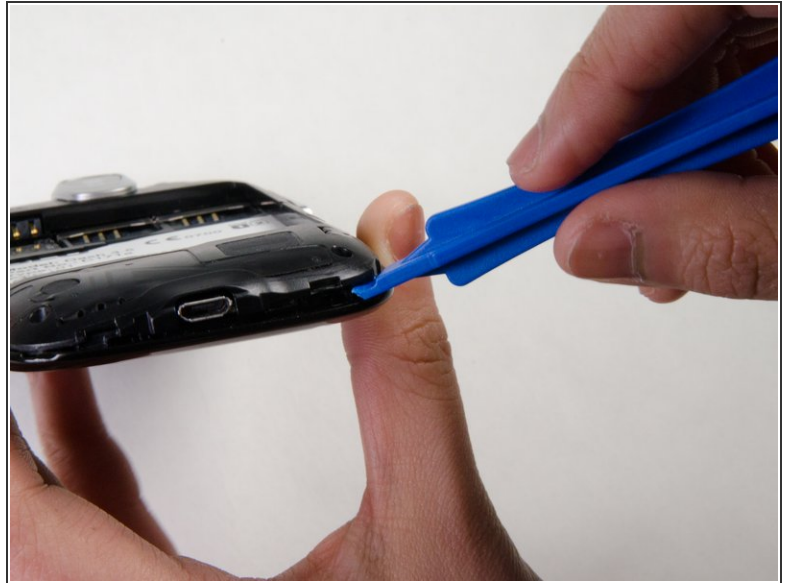


- Use the 000 Phillips screwdriver to remove the four 4.5 mm screws from the corners of the interior back panel.
- Use the opening tool to pry open the plastic back panel to expose the motherboard.

Step 4

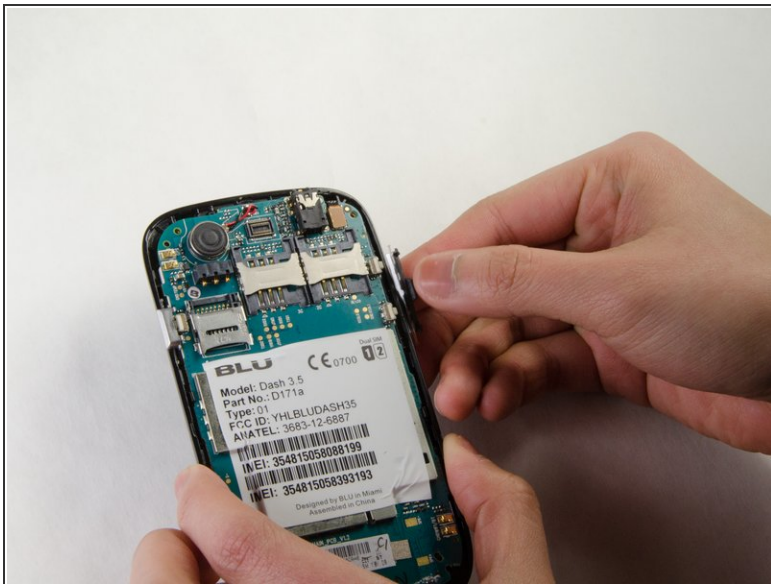


- Remove volume and lock buttons by lifting them gently from the casing.

Step 5 — Ear Speaker

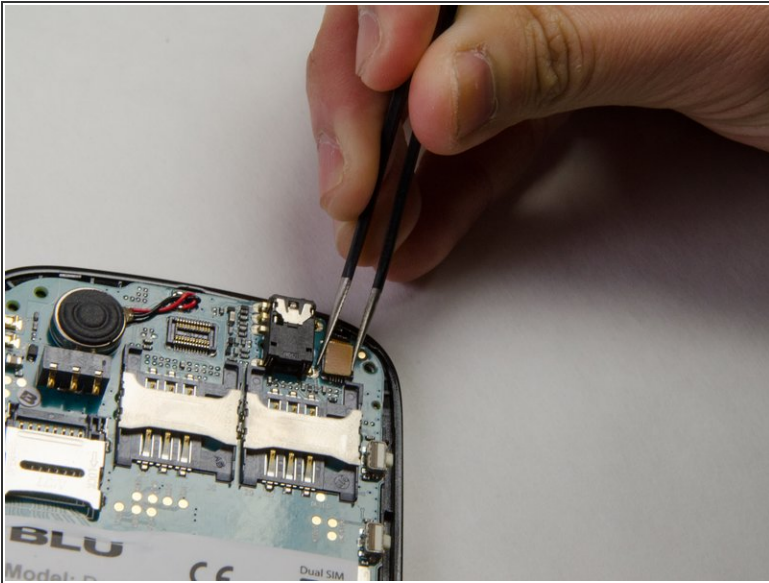

- Use tweezers to lift the screen wire tab where the cable is connected.
- Use the opening tool to pry the motherboard from the front face plate.

Step 6

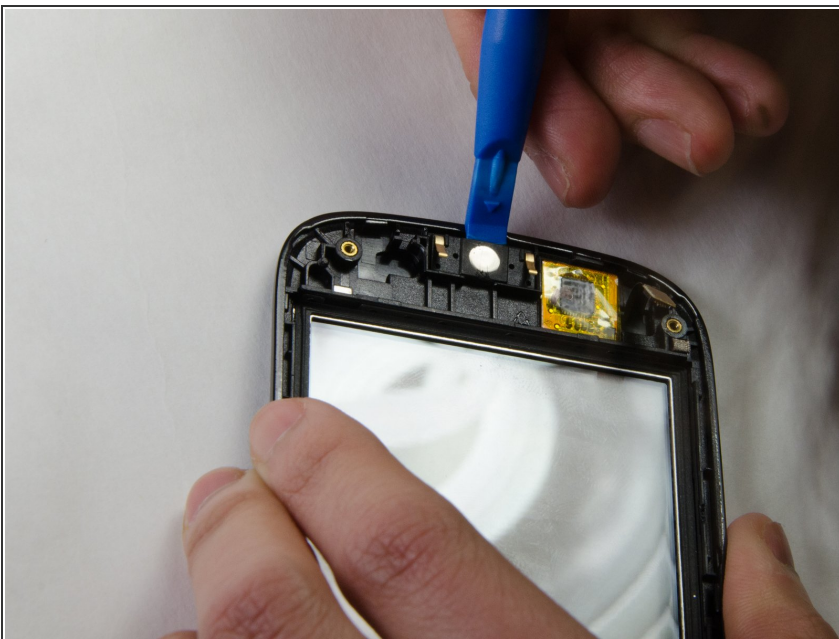

- Use opening tool to pry speaker from front panel.
- ☑ Note prong direction

To reassemble your device, follow these instructions in reverse order.