



# Microsoft Band 2 Buttons Replacement

In the event that the buttons on the side of...

Written By: Chris Syracuse



# INTRODUCTION

In the event that the buttons on the side of the Microsoft Band 2 become jammed or unresponsive, follow this guide to learn how to remove them for cleaning or replacement.

## TOOLS:

Metal Spudger (1)

Heat Gun (1)



T3 Torx Screwdriver (1)

Tweezers (1)

## Step 1 — Screen



 **Wear proper gloves when using a heatgun.**

- Use a heatgun to melt the adhesive beneath the screen. Heat the metal around edges of the screen.
-  Avoid heating the rubber watch band as it will quickly melt.
-  Heating the LCD screen may damage it. Avoid this procedure unless you intend to replace the screen.

## Step 2



- Use a [spudger](#) and plastic [opening picks](#) to pry the screen away from the Band 2.

## Step 3




- Use metal [tweezers](#) to gently detach the orange press-fit (or "pop") connector.

## Step 4 — Buttons



- Use the T3 Torx Screwdriver to remove the two 2.7 mm screws


## Step 5

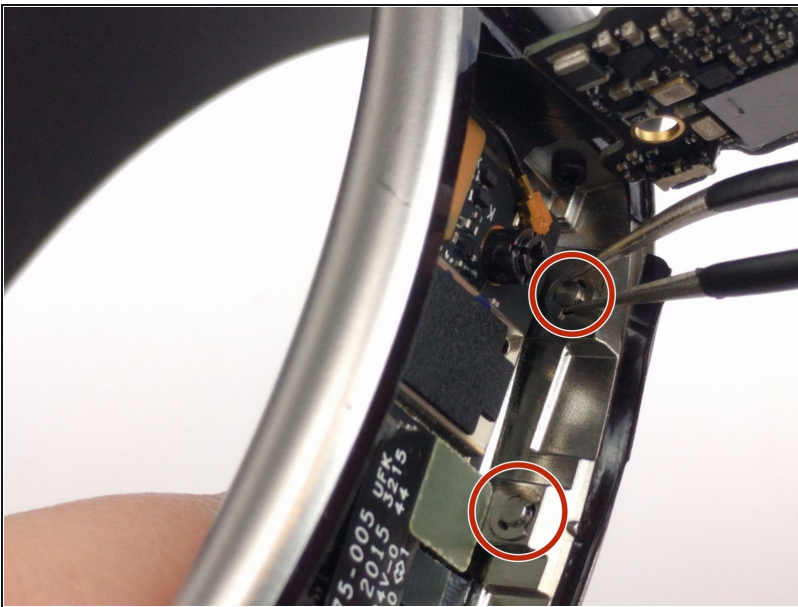

- Lift the logic board and locate the two circular clips securing the buttons from inside the wall of the Band 2. Remove them by sliding the clips sideways.



## Step 6

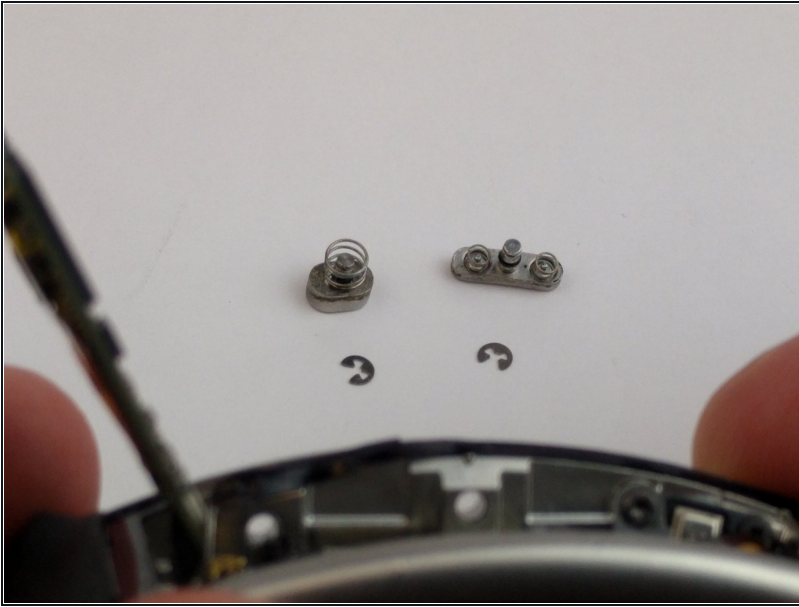

- Remove the buttons, being careful not to lose the springs.

---

To reassemble your device, follow these instructions in reverse order.